


AUDIO VIDEO BROADCAST



tasker®

LIVE

[www.tasker.it](http://www.tasker.it)

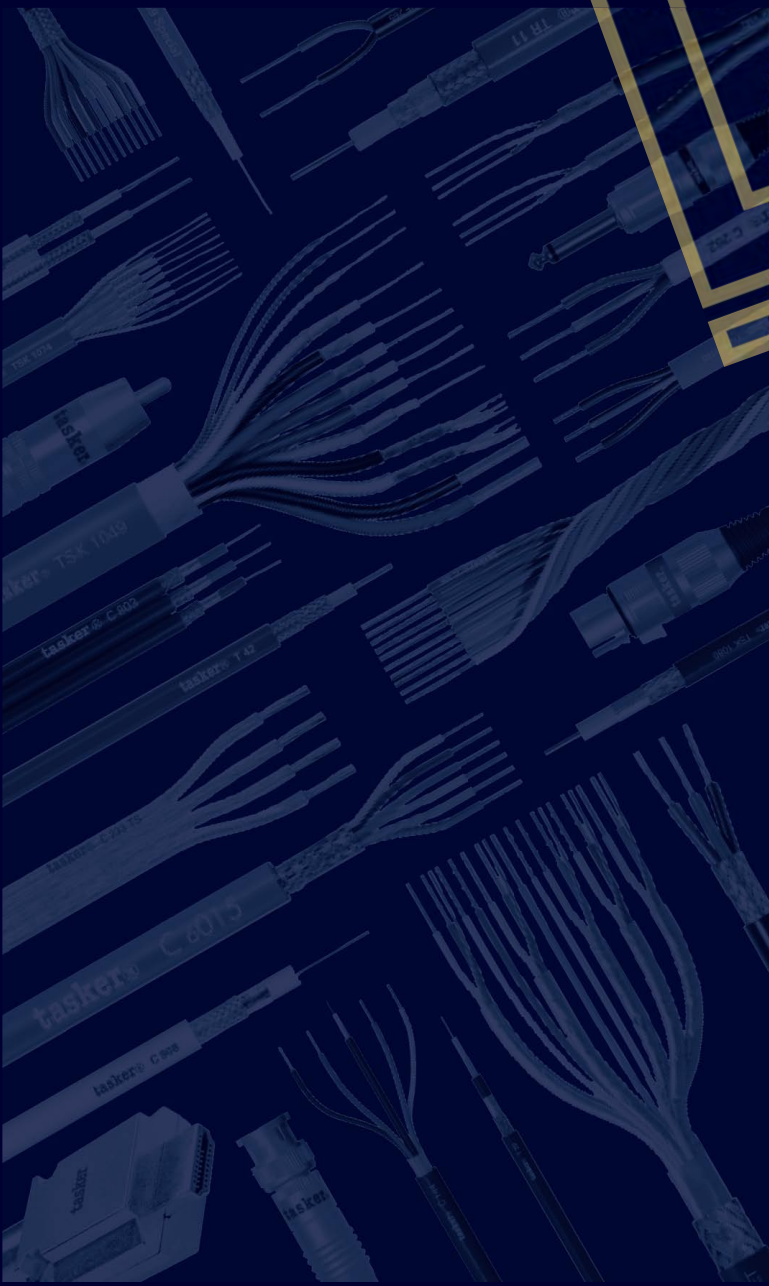

A word cloud containing terms such as: AUDIO, VIDEO, BROADCAST, NETWORK, EVENTS, MULTIVIDEO, LIVE, MADE IN ITALY, QUALITÀ, CONCERTI, ISOLAMENTO, MP3 HOME THEATER, RICERCA E SVILUPPO, FLESSIBILITÀ, CONNETTORI, TASKERCABLES.COM, and INFORMATIONICA.

# tasker®

## Head Office and Export Dept:

20090 Cusago (MI) - Italy  
Viale Europa, 74  
Tel. +39 02 90 39 45 56  
Tel. +39 02 90 39 41 58  
Fax +39 02 90 39 45 51  
[www.taskercables.com](http://www.taskercables.com)

## Ufficio Commerciale e Centro Distribuzione:

20090 Cusago (MI) - Italia  
Viale Europa, 72 Str. F/12  
Tel. +39 02 90 39 00 37  
Fax +39 02 90 39 00 49  
[www.tasker.it](http://www.tasker.it)



Cavi per Audio, Video, broadcast, strumenti musicali e non solo... **tasker** produce da oltre 30 anni cavi di alta qualità riconosciuti a livello internazionale per elettronica, telecomunicazioni e per il settore audio professionale, musicale, broadcast e industriale. Nella scelta di un cavo affidabile, sicuro e funzionante la discriminante deve essere l'alta qualità del prodotto, dovuta dalla sua origine e dall'esperienza nella ricerca e nell'utilizzo di materiali idonei e conformi alla realizzazione di un prodotto finito. E' infatti dalla qualità di un cavo che dipende in parte il buon esito di una rappresentazione teatrale o di un evento musicale. Questi cavi rispettano gli Standard di Qualità **tasker®**:

- connettori robusti con innesti di precisione, cavi costruiti con materiali nobili extra flessibili ed idonei alla trasmissione sonora.
- Eccellente Qualità del rame O.F.C. dei conduttori multifilari che offre la massima flessibilità, conducibilità e bassa impedenza.
- L'isolamento del conduttore interno in polietilene espanso assicura minime perdite e bassa capacità.
- Nuovissimi materiali isolanti ed internamente conduttivi perché addizionati da minerali che costituiscono un nuovo concetto dinamico di schermatura. In particolare la schermatura 'Carbon Screen' stabilizza significativamente le linee di trasmissione sonora.
- Una accurata schermatura a treccia di rame coprente fino al 100% che impedisce la trasmissione di qualsiasi rumore ed interferenza.
- Per le guaine speciali polimeri extra flessibili e duraturi garantiscono una forte resistenza alla trazione ed all'uso frequente.

Infine nei cavi audio tutti i collegamenti prevedono che lo schermo sia collegato con la massa del cavo al fine di evitare distorsioni ed altre interferenze rumorose. La vasta gamma di prodotti **tasker@LIVE** per il settore musicale e Broadcast, vanta spine di alto contenuto tecnologico e speciali elementi di collegamento, tutti singolarmente controllati e testati e con una forte resistenza alla trazione nei punti più critici, che garantiscono una trasmissione sicura ed un segnale ultra pulito mai ottenuto prima, a partire dallo strumento musicale passando per gli effetti fino all'amplificatore. La nuova linea **tasker@LIVE** di cavi assemblati per Strumenti Musicali, Microfoni, Casse Acustiche ed applicazioni Audio/Video offre una vasta scelta sia per le diverse metrature, che per i colori e la varietà di modelli, oltre che alla possibilità di realizzare assemblati su richiesta e personalizzati secondo le specifiche esigenze del cliente. Tutti i cavetti vengono realizzati artigianalmente da personale qualificato con esperienza pluriennale, utilizzando connettori di eccellente qualità come ad esempio: Neutrik, **tasker**, Lemo che vengono assemblati con cavi audio **tasker**, garanzia di alte prestazioni e basse attenuazioni.

In questo modo si consente una riproduzione in Alta Fedeltà del segnale audio evitando fastidiose interferenze e diafonie. I cavi assemblati **tasker@LIVE** vi daranno quindi la possibilità di cogliere tutti gli effetti delle vostre composizioni e dei brani musicali così come se foste in un vero studio di registrazione o direttamente ad un evento Live.

Per maggiori informazioni sulla linea **tasker@LIVE** consultate il nostro sito: [www.tasker.it](http://www.tasker.it)



Cables for Audio, Video, Broadcast, musical instruments and more... **tasker** has been producing for over 30 years high quality cables internationally recognized for electronics, telecommunications and for the professional audio, music, broadcast and industrial fields. When choosing a reliable, secure and working cable the discriminant must be its high quality, due to its origin and to the experience in finding and using appropriate materials and conform to the realization of a finished product. As a matter of fact the success of a play or a musical event depends in part on the quality of a cable. These cables meet **tasker®** Standard of Quality:

- Sturdy connectors with precision grafts, cables manufactured with quality materials extra flexible and suitable for sound transmission.
- Excellent quality O.F.C. copper stranded conductors which offers maximum flexibility, conductivity, and low impedance.
- Isolation of the inner conductor in polyethylene foam ensures minimal loss and low capacity.
- Brand new insulating materials and internally conductive because of added minerals that make up a new dynamic concept of shielding. In particular the shield 'Carbon Screen' significantly stabilizes the lines of sound transmission.
- An accurate shielding with copper braid covering up to 100%, which prevents the transmission of any noise and interference.
- For the sheaths, special extra flexible and durable polymers provide a strong draft strength and frequent use.

Finally, in the audio cables all the connections require the screen to be connected with the mass of the cable in order to avoid distortions and other noisy interference. The wide range of products **tasker@LIVE** for the Music industry and Broadcast, boasts high-tech plugs and special connecting elements, all individually checked and tested and with a high draft strength at critical points, which ensure secure transmission and an ultra clean signal never got before, starting from the instrument to the amplifier through the effects.

The new line of pre-made cables **tasker@LIVE** for Musical Instruments, Microphones, Loudspeakers and Audio/Video applications offers a wide choice for different sizes, for the colours and the variety of models, as well as the ability to create assemblies on request and customized to meet specific customer needs.

All cables are handcrafted by skilled personnel with years of experience, using high quality connectors such as: Neutrik, **tasker**, Lemo, which are assembled with audio cables **tasker**, guarantee high performance and low attenuation.

In this way you will play it in high fidelity audio signal to avoid harmful interference and crosstalk. The pre-made cables **tasker@LIVE** will give you the possibility to capture all effects of your compositions and songs as you would be in a real recording studio or directly to a live event.

For more information on **tasker@LIVE** visit our website: [www.tasker.it](http://www.tasker.it)



Kabel für Audio, Video, Broadcast, Musikinstrumente und vieles mehr... **tasker** produziert seit über 30 Jahren hochwertigen Kabeln für Elektronik, Telekommunikation und für die professionelle Audio-, Musik-, Broadcast- Sektor und Industrie international anerkannt. Bei der Wahl eines Kabels zuverlässige, sichere und läufige die Diskriminante muß die hochwertige Qualität eines Produkts sein, aufgrund seiner Herkunft und Erfahrung bei der Suche und Verwendung geeigneter Materialien entsprechen der Realisierung eines fertigen Produkts. Das Erfolg eines Theaterstücks oder einer musikalischen Veranstaltung hängt zum Teil von der Qualität eines Kabels. Diese Kabel erfüllen die Qualitätsstandards **tasker®**:

- Robuste Steckverbinder mit Präzision Grafts, Kabel mit hochwertigen Materialien besonders flexibel und geeignet für Tonübertragung hergestellt. Ausgezeichnete Qualität von Kupferlitzen O.F.C., die maximale Flexibilität, Leitfähigkeit und niedriger Impedanz.
- Isoliermaterialien der Innerleiter in Polyethylenschaum gewährleistet minimalen Verlusten und geringer Kapazität. Brand new-Dämmstoffe und intern leitfähigen wegen der zugesetzten Mineralstoffe, aus denen sich eine neue dynamische Konzept der Abschirmung bilden. Insbesondere das Schild 'Carbon Screen' deutlich stabilisiert die Linien der Schallübertragung.
- Eine genaue Abschirmung mit Kupfer-Geflecht von bis zu 100%, was die Übertragung von jeglichem Lärm und Störungen verhindert.

-Für den Scheiden, besonderes Extra flexibel und haltbar Polymere bieten eine starke Zugfestigkeit und häufigen Einsatz. Schließlich wird in allen Audio-Kabel übertragen die Verbindungen, die der Schirm mit der Masse der Kabel angeschlossen ist, um Verzerrungen und andere laute Störungen zu vermeiden.

Das Sortiment von Produkten **tasker®** für die Industrie- und Broadcast-Music Live, bietet High-Tech-Stecker und spezielle Verbindungselemente, die alle einzeln geprüft und getestet sind, und mit einer hohen Zugfestigkeit an kritischen Punkten, die eine sichere Übertragung zu gewährleisten und ein ultra sauberes Signal kam nie vor, beginnend mit dem Instrument in den Verstärker durch die Effekte. Die neue Linie von Kabel Assemblies **tasker@LIVE** für Musikinstrumente, Mikrofone, Lautsprecher und Audio/Video Anwendungen bietet eine große Auswahl für verschiedene Größen, für die Farben und die Vielfalt der Modelle, sowie die Fähigkeit, Versammlungen zu schaffen Anfrage und individuell an spezifische Kundenanforderungen zu erfüllen. Alle Kabel werden in Handarbeit gefertigt von Fachpersonal mit langjähriger Erfahrung mit hochwertigen Steckverbindern wie: Neutrik, **tasker**, Lemo, die mit Audio-Kabel Tasker, die garantiert hohe Leistung und geringe Dämpfung zusammengesetzt werden. Auf diese Weise werden Sie es in der High Fidelity Audio-Signal spielen schädliche Interferenzen und Übersprechen zu vermeiden. Das Prefab Kabel **tasker@LIVE** gibt Ihnen die Möglichkeit, alle Auswirkungen Ihrer Kompositionen und Lieder, wie Sie es in ein echtes Tonstudio oder direkt an einer Live-Veranstaltung einzufangen.

Für weitere Informationen über **tasker@LIVE** Online- besuchen Sie unsere Website: [www.tasker.it](http://www.tasker.it)



Câbles pour audio, vidéo, diffusion, instruments de musique et plus... **tasker** produit depuis 30 ans câbles de haute qualité internationalement reconnues, pour l'électronique, les télécommunications pour le secteur audio professionnel, de la musique, broadcast et industrielle. Lors du choix d'un câble fiable, sécurisé et qui fonctionne bien le discriminant doit être un produit de haute qualité, en raison de son origine et de l'expérience dans la recherche et l'utilisation de matériaux appropriés et conformes à la réalisation d'un produit fini. Est en effet de la qualité d'un câble qui dépend en partie le succès d'une représentation de théâtre ou un événement musical. Ces câbles répondent à la norme de qualité **tasker®**:

- Connecteurs robustes avec embayages de précision, câbles fabriqués avec des matériaux nobles extra flexibles et approprié pour la transmission du son.
- La qualité du cuivre O.F.C. du conducteurs multi fils qui offre une flexibilité maximale, conductivité, et une faible impédance.

-L'isolation du conducteur interne en polyéthylène expansé assure une perte minimale et une faible capacité.

-Nouveaux matériaux isolants et conducteurs à l'intérieur en raison de minéraux ajoutés qui forment un nouveau concept dynamique de blindage. En particulier le blindage en 'Carbon Screen' stabilise de manière significative les lignes de transmission du son. Un précis blindage - avec tresse de cuivre couvrant jusqu'à 100%, ce qui empêche la transmission de tout bruit et interférence.

-Pour les gaines spéciales polymères extra flexibles et durables fournissent une forte résistance à la traction et à l'utilisation fréquente.

Enfin, dans tous les câbles audio tous les connexions prévoient que le blindage est relié à la masse du câble afin d'éviter les distorsions et autres interférences bruyant. La large gamme de produits **tasker@LIVE** pour les secteurs de la Musique et Broadcast, se vante de fiches de haute technologie et fermetures spéciales, tous individuellement vérifiés et testés et avec une résistance à la traction élevée aux points critiques, qui assurent la transmission sécurisée et un signal ultra propre jamais eu avant, à partir de l'instrument à l'amplificateur à travers les effets. La nouvelle ligne des câbles assemblés **tasker@LIVE** pour Instruments de musique, microphones, haut-parleurs et applications audio/vidéo offre un large choix soit pour les tailles différentes que pour les couleurs et la variété des modèles, ainsi que la possibilité de créer des assemblages sur demande et sur mesure pour répondre aux besoins spécifiques du client.

Tous les câbles assemblés sont fabriqués à la main par du personnel qualifié avec des années d'expérience, en utilisant des connecteurs de haute qualité tels que: Neutrik, **tasker**, Lemo, qui sont assemblés avec des câbles audio **tasker**, garanti de haute performance et faible atténuation. De cette façon, vous allez jouer dans la haute fidélité du signal audio afin d'éviter les interférences nuisibles et la diaphonie.

Les câbles assemblés **tasker@LIVE** vous donneront la possibilité de capturer tous les effets de vos compositions et des chansons comme vous le feriez dans un vrai studio d'enregistrement ou directement à un événement live.

Pour plus d'informations sur la ligne **tasker@LIVE**, visitez notre site Web: [www.tasker.it](http://www.tasker.it)



Cables para Audio, Video, broadcast, instrumentos musicales y mucho más... **tasker** fabrica para más de 30 años cables de alta calidad reconocidos internacionalmente para la electrónica, las telecomunicaciones y para el sector audio profesional, musical, broadcast y industrial.

A elegir un cable fiable, seguro y funcionante, el discriminante debe ser la elevada calidad del producto debido a su origen y experiencia en la búsqueda y utilización de materiales adecuados y cumplidos a la realización de un producto final. De hecho, el éxito de un teatro o un evento musical depende de la calidad de un cable. Estos cables cumplen con los Estándares de calidad **tasker®**:

- Conectores robustos, con injerto de precisión, cables fabricados con materiales nobles extra-flexibles y adecuados a la transmisión del sonido.
- Excelente calidad del cobre O.F.C. de los conductores trenzados, que ofrece la máxima flexibilidad, conductividad y baja impedancia.
- El aislamiento del conductor interior en spuma de polietileno asegura una mínima pérdida y baja capacidad.

-Muy nuevos materiales aislantes y conductivos internos, porque añadidos de minerales que forman un nuevo concepto dinámico de blindaje.

En particular, la pantalla "Carbon Screen" que estabiliza considerablemente las líneas de transmisión de sonido.

-Una cuidada protección con malla de cobre trenzado que cubre hasta el 100%, que impide la transmisión de cualquier ruido y interferencias.

-Para las vainas especiales polímeros flexibles y duraderos garantizan una fuerte resistencia a la tracción y al uso frecuente.

-Por último, en los cables audio todas conexiones requieren que la pantalla sea conectada con la masa del cable con el fin de evitar distorsiones y interferencias ruidosas. La amplia gama de productos **tasker@LIVE** para el sector musical y Broadcast, cuenta conectores de alta tecnología y especiales elementos de conexión, especiales, todos individualmente verificados y controlados y con una fuerte resistencia a la tracción en los puntos más críticos, que aseguran la transmisión de la señal ultra limpio obtenido nunca antes, a partir del instrumento musical pasando a través de los efectos a l'amplificador. La nueva línea de conexiones **tasker@LIVE** por Instrumentos Musicales, Micrófonos, Altavoces y Aplicaciones de Audio/Video ofrece una amplia variedad de tamaños, colores y la variedad de modelos, así como la posibilidad de producir conexiones sobre demanda y personalizadas según las necesidades específicas del cliente. Todas las conexiones están hechas a mano por personal especializado con años de experiencia, utilizando conectores de alta calidad tales como: Neutrik, **tasker**, Lemo, que se ensamblan con los cables de audio Tasker, un alto rendimiento garantizado y baja atenuación.

De esta manera se reproduce en alta fidelidad la señal de audio evitando la interferencia y las diafonias.


Las conexiones **tasker** Live les daran la posibilidad de capturar todos los efectos de sus composiciones y canciones así como estar en un auténtico estudio de grabación o directamente a un evento Live.

Para obtener más información, visite nuestro sitio web: [www.tasker.it](http://www.tasker.it)

AUDIO VIDEO RICERCA E SVILUPPO LIVE  
 SYSTEM SVILUPPO  
 MP3 HOME THEATER QUALITÀ CONCERTI ISOLAMENTO  
 INFORMATICA COMUNICAZIONE TASKERCABLES.COM  
 NETWORK BROADCAST MULTIMEDIA  
 FLESSIBILITÀ CONNETTORI EVENTI



...a project further...

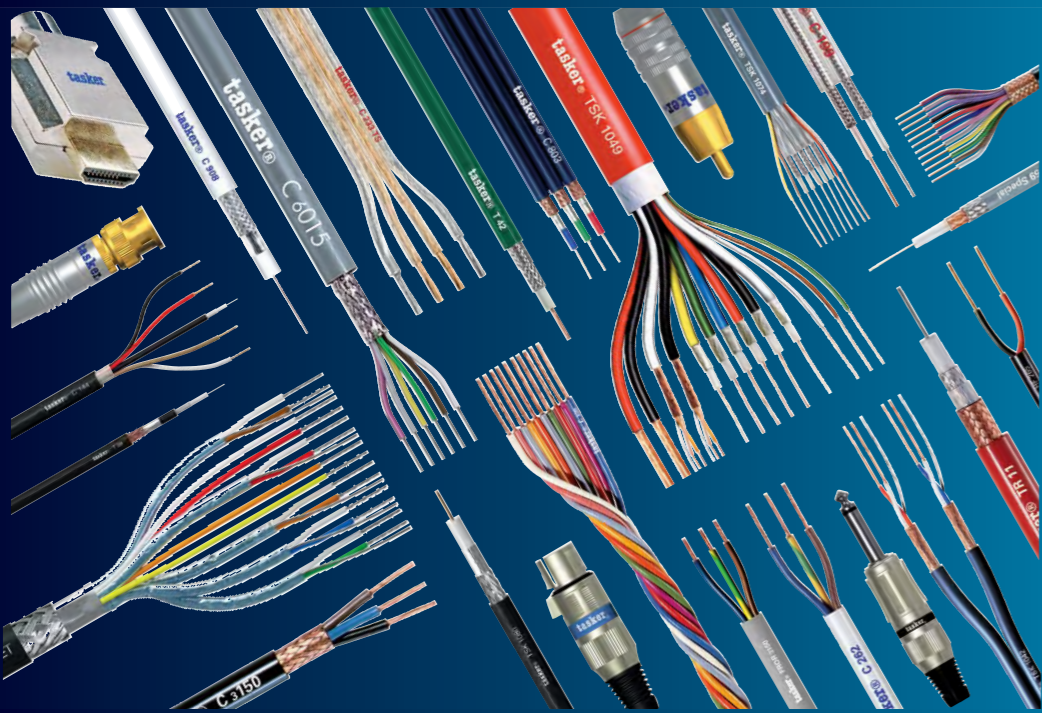

Produzioni speciali su richiesta!  
 Tutto in pronta consegna!  
 Special production on demand!  
 Everything on stock!

# TASKER®

[www.tasker.it](http://www.tasker.it)  
 made in Italy

## Table of Contents

<b>Analogue Audio</b>	XLR-XLR	from 4 to 16
	XLR-Bantam	from 17 to 20
	Bantam	from 21 to 22
	XLR-Jack Balanced	from 23 to 26
	XLR-Jack Unbalanced	from 27 to 30
	Jack-Jack Balanced	from 31 to 35
	Jack-Jack Unbalanced	from 36 to 39
	Jack-Jack Guitar Cable	from 40 to 44
	Cinch-Cinch	from 45 to 46
	Jack-Cinch	47
	Cinch-XLR	from 48 to 49
	Audio Adapters	from 50 to 63
<b>Speaker Cables</b>	Speaker Jack-Jack	from 66 to 68
	Speaker Jack-SpeakOn	from 69 to 70
	Speaker SpeakOn-SpeakOn	from 71 to 87
	Speaker Adapters	from 88 to 90
	Speaker Active	from 91 to 95
<b>Digital AES/EBU Cables</b>	DMX 3p XLR	from 98 to 103
	DMX 3p XLR Drums	from 104 to 106
	DMX 3p XLR Power	from 107 to 112
	DMX 3p XLR Power and Drums	from 113 to 120
	DMX 5p XLR	from 121 to 126
	DMX 5p XLR Drums	from 127 to 130
	DMX 5p XLR Power	131
	DMX 5p XLR Power and Drums	from 132 to 134
<b>Video Cables</b>	Video RGB HV	from 137 to 143
	Video VGA	from 144 to 148
	Video HDMI	from 149 to 152
	Video HDMI/DVI	from 153 to 154
	Video DVI	from 155 to 156
	HDMI/DVI Extenders/Repeaters	from 157 to 160
	Video HDMI Fiber Optic	161
	Video HDMI/DVI Fiber Optic Extender	from 162 to 165
	Video Analogue	from 166 to 170
	Video HDTV-HD SDI	from 171 to 177
	S-Video	from 178 to 179
	Video HD Camera SMPTE/ARIB	from 180 to 188
	Video Triax Camera	from 189 to 191
<b>Data Communication</b>	CAT Flexible	from 194 to 196
	CAT Adapters	from 197 to 198
	Fiber Optic Simplex	from 199 to 204
	Fiber Optics Duplex	from 205 to 210
	RS422	211
	Fiber Optics Neutrik OpticalCON	from 212 to 241
<b>Multicore Cables</b>	Stage Box Analogue	from 244 to 257
	Stage Box Digital	from 258 to 266
	Extension	from 267 to 270
	Adapters Analogue/Digital	from 271 to 287
	Analogue/Digital LK Connectors	from 288 to 299
	Analogue/Digital Harting Connectors	from 300 to 317
	Analogue Socapex Connectors	from 318 to 320
<b>Special Combi Cable</b>	Special Combi Cable	from 323 to 332
<b>Power Cables</b>	AC Outlet	from 335 to 337
	Splitters	from 338 to 342
	Extension	from 343 to 346
	Cable and Drums	from 347 to 354
	Neutrik PowerCON	from 355 to 360
<b>OCC Optical Cable</b>	Broadcast Distribution Cable	from 363 to 366
	Broadcast Distribution Cable and Drums	from 367 to 374
	Broadcast Breakout Cable	from 375 to 378
	Broadcast Breakout Cable and Drums	from 379 to 386

# Analogue Audio

## Balanced Microphone Cables: Cable Tasker C114/260

Connectors: Neutrik NC3FXX – NC3MXX



NC3FXX

NC3MXX



### APPLICATIONS

Flexible low capacity microphone cable, with spiral shield, suitable for the realization of audio assembly.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact PE  
**Core colours:** Orange, Transparent Waste filler between conductors  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:**  
**C114:** Black, Grey  
**C260:** Red, Blue, Yellow, Green

## Carbon Screened Balanced Audio Cables: Cable Tasker TSK 1026

Connectors: Neutrik NC3FXX – NC3MXX



NC3FXX

NC3MXX



The "Supreme" reproduction of your sound and more...

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact PE  
**Core colours:** Red, Transparent  
**Inner Sheaths:** Conductive Carbon Screen  
**Waste filler between conductors**  
**Total tape:** Unweaved Polyester  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C114	2	2 X 0,25 (23 AWG)	8 X 0,20	1,5	6,0	100	B	4,7

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	pF/mt	pF/mt
75	51	90

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							ml.	Type	Kg.
TSK 1026	2	2 X 0,25 (25 AWG)	8 X 0,20 O.F.C.	1,5 PE	1,9 Conductive Screen	6,5	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	IMPEDANCE	VELOCITY OF PROPAGATION	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	Ω ± 3%	%	°C
75	80	108	80	85	-15/+70

MFCH114 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH114	BLACK	3 M	1
MFCH114	BLACK	6 M	1
MFCH114	BLACK	9 M	1
MFCH114	BLACK	12 M	1
MFCH114	BLACK	24 M	1

MFCH260 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH260	BLUE	3 M	1
MFCH260	BLUE	6 M	1
MFCH260	BLUE	9 M	1
MFCH260	BLUE	12 M	1
MFCH260	BLUE	24 M	1

MF114 GREY			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH114	GREY	3 M	1
MFCH114	GREY	6 M	1
MFCH114	GREY	9 M	1
MFCH114	GREY	12 M	1
MFCH114	GREY	24 M	1

MFCH260 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH260	GREEN	3 M	1
MFCH260	GREEN	6 M	1
MFCH260	GREEN	9 M	1
MFCH260	GREEN	12 M	1
MFCH260	GREEN	24 M	1

MFCH260 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH260	RED	3 M	1
MFCH260	RED	6 M	1
MFCH260	RED	9 M	1
MFCH260	RED	12 M	1
MFCH260	RED	24 M	1

MFCH260 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH260	YELLOW	3 M	1
MFCH260	YELLOW	6 M	1
MFCH260	YELLOW	9 M	1
MFCH260	YELLOW	12 M	1
MFCH260	YELLOW	24 M	1

TSK1026 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
TSK102603	BLACK	0,3 M	1
TSK102606	BLACK	0,6 M	1
TSK102609	BLACK	0,9 M	1
TSK102612	BLACK	1,2 M	1

# Analogue Audio

## Carbon Screened Balanced Audio Cables: Cable Tasker TSK 1026

Connectors: Neutrik NC3FXX-BAG – NC3MXX-BAG



The "Supreme" reproduction of your sound and more...



### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact PE  
**Core colours:** Red, Transparent  
**Inner Sheaths:** Conductive Carbon Screen  
**Waste filler between conductors**  
**Total tape:** Unweaved Polyester  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colour:** Black

## Carbon Screened Balanced Audio Cables: Cable Tasker TSK 1028

Connectors: Neutrik NC3FXX – NC3MXX



The "Supreme" reproduction of your sound and more...



### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact PE  
**Core colours:** Red, Transparent  
**Inner Sheaths:** Conductive Carbon Screen  
**Waste filler between conductors**  
**Total tape:** Unweaved Polyester  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mm <sup>2</sup>	mm.	∅ mm.
TSK 1026	2	2 X 0,25 (25 AWG)	8 X 0,20 O.F.C.	1,5 PE	1,9 Conductive Screen	6,5	100	B	

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mm <sup>2</sup>	mm.	∅ mm.
TSK 1028	2	2 X 0,25 (25 AWG)	8 X 0,20 O.F.C.	1,5 PE	1,9 Conductive Screen	6,5	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	IMPEDANCE	VELOCITY OF PROPAGATION	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	Ω ± 3%	%	°C
75	80	108	80	85	-15/+70

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	IMPEDANCE	VELOCITY OF PROPAGATION	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	Ω ± 3%	%	°C
75	80	108	80	85	-15/+70

TSB1026 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
TSB102603	BLACK	0.3 M	1
TSB102606	BLACK	0.6 M	1
TSB102609	BLACK	0.9 M	1
TSB102612	BLACK	12 M	1



TSK1028 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
TSK102803	BLACK	0.3 M	1
TSK102806	BLACK	0.6 M	1
TSK102809	BLACK	0.9 M	1
TSK102812	BLACK	12 M	1



# Analogue Audio

## Carbon Screened Balanced Audio Cables: Cable Tasker TSK 1028

Connectors: Neutrik NC3FXX-BAG – NC3MXX-BAG





### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact PE  
**Core colours:** Red, Transparent  
**Inner Sheaths:** Conductive Carbon Screen  
**Waste filler between conductors**  
**Total tape:** Unweaved Polyester  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Cable Tasker TSK 1042

Connectors: Neutrik 2x NC3FXX BAG – 2x NC3MXX BAG

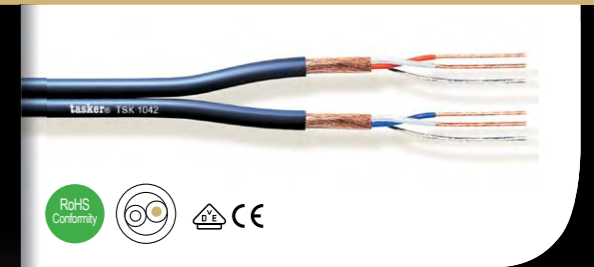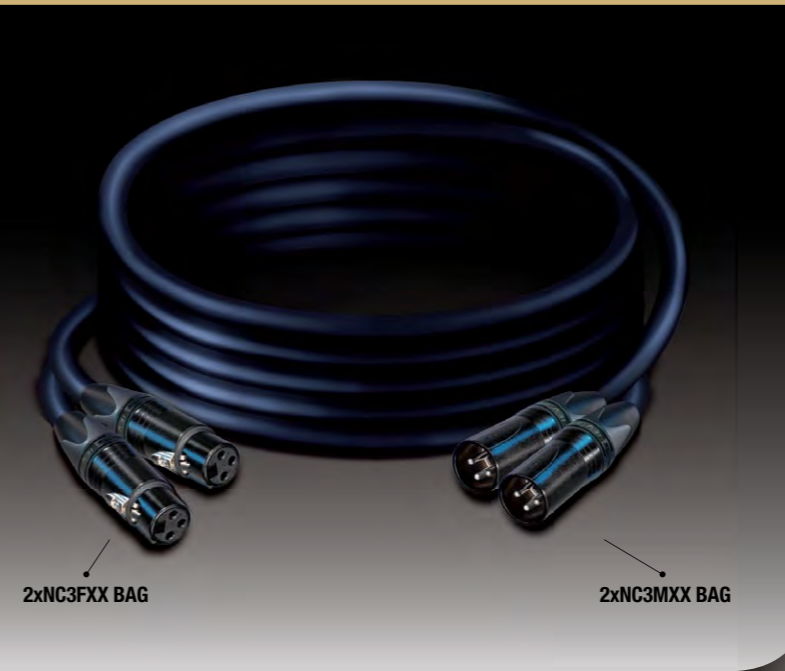

### APPLICATIONS

Special flat pair cable, more flexible and divisible, suitable for the realization of professional audio-balanced assembly.


### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Pair colours:** White-Red, White-Blue  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colour:** Blue-night

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	Ø mm.	Ø mm.	mt.	Type	Kg.
TSK 1028	2	2 X 0.25 (25 AWG)	8 X 0.20 O.F.C.	1,5 PE	1,9 Conductive Screen	6,5	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	IMPEDANCE	VELOCITY OF PROPAGATION	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	Ω ± 3%	%	°C
75	80	108	80	85	-15/+70

TSB1028 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
TSB102803	BLACK	0.3 M	1
TSB102806	BLACK	0.6 M	1
TSB102809	BLACK	0.9 M	1
TSB102812	BLACK	12 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	mt.	Type	Kg.
TSK 1042	2 X 2	2 X 2 X 0.22 (24 AWG)	28 X 0,10	1,1	4,5 X 9,1	100	B	6,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	75	160	49	-15/+70


MFBAG1042 BLUE-NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFBAG1042	BLUE-N.	3 M	1
MFBAG1042	BLUE-N.	6 M	1
MFBAG1042	BLUE-N.	9 M	1
MFBAG1042	BLUE-N.	12 M	1
MFBAG1042	BLUE-N.	24 M	1



# Analogue Audio

## Balanced Microphone Cables: Cable Tasker C301

Connectors: Neutrik NC3FXX BAG – NC3MXX BAG

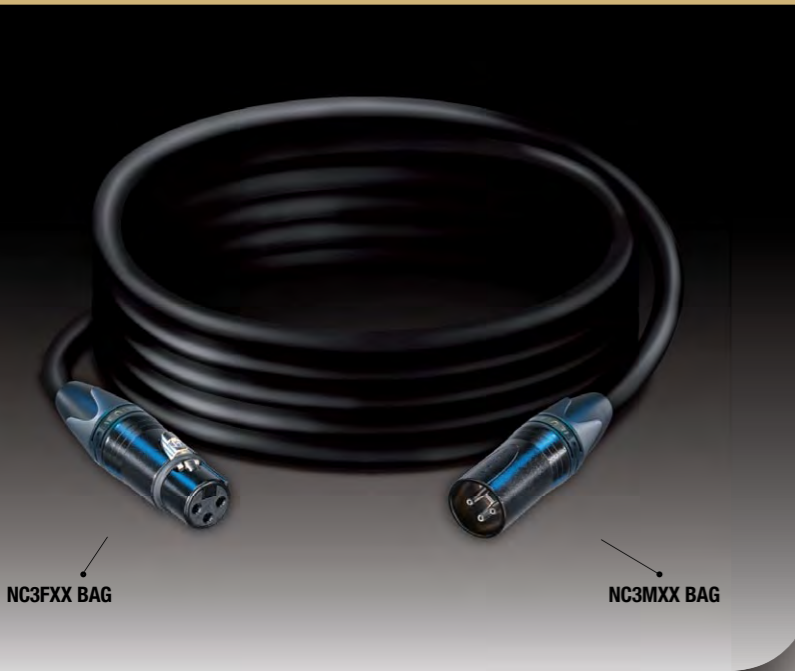

### APPLICATIONS

Double sheathed balanced low capacity microphone cable for audio and Broadcast. Extra flex cable with double density sheath, suitable for the realization of audio assembly.


### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile filler between conductors -  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Double Sheath:** Double different density PVC  
**Sheath colours:** Black, Yellow, Blue, Red, Green



## Balanced Microphone Cables: Cable Tasker C128

Connectors: Neutrik NC3FXX – NC3MXX

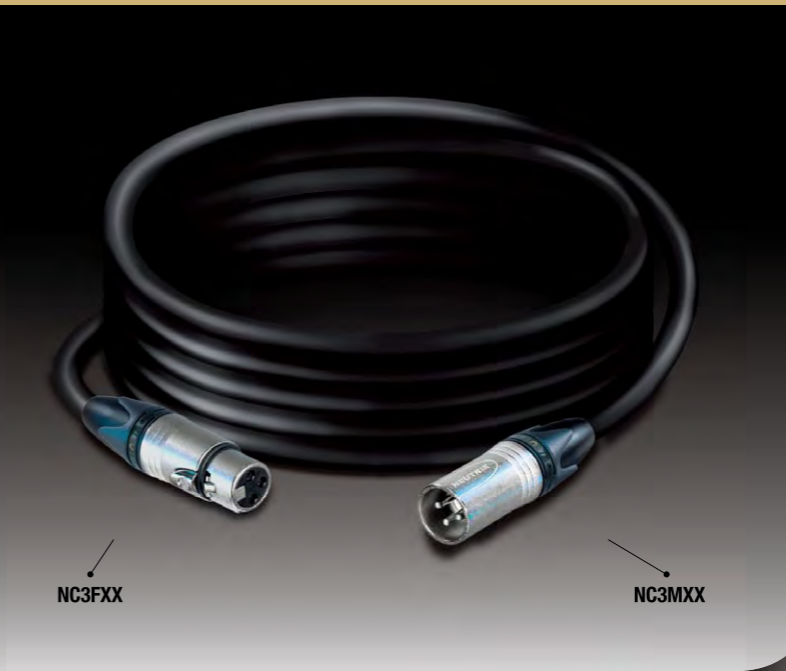

### APPLICATIONS

Supreme balanced low capacity microphone cable for audio and Broadcast, suitable for fixed installation on long distances.

### CHARACTERISTICS

**Conductors:** n. 1 O.F.C. red copper n. 1 O.F.C. tinned copper  
**Cond. insulation:** Compact PE  
**Core colours:** Transparent Waste filler between conductors  
**Shield:** Braided covering 90% O.F.C. tinned copper  
**Sheath:** PVC  
**Sheath colours:** Black, Grey, Red, Green, Blue, Yellow



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						mm <sup>2</sup>	mm.	∅ mm.					
C301	2	1 X 2 X 24 (0,22)	28 X 0,10	1,1	6,0	100	B	5,0	90	75	160	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						mm <sup>2</sup>	mm.	∅ mm.					
C128	2	2 X 0,35 (22 AWG)	11 X 0,20	1,7	6,3	100	B	5,0	60	61	104	49	-15/+70

MFBAG301 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFBAG301	BLACK	3 M	1
MFBAG301	BLACK	6 M	1
MFBAG301	BLACK	9 M	1
MFBAG301	BLACK	12 M	1
MFBAG301	BLACK	24 M	1

MFBAG301 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFBAG301	RED	3 M	1
MFBAG301	RED	6 M	1
MFBAG301	RED	9 M	1
MFBAG301	RED	12 M	1
MFBAG301	RED	24 M	1

MFBAG301 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFBAG301	YELLOW	3 M	1
MFBAG301	YELLOW	6 M	1
MFBAG301	YELLOW	9 M	1
MFBAG301	YELLOW	12 M	1
MFBAG301	YELLOW	24 M	1

MFBAG301 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFBAG301	GREEN	3 M	1
MFBAG301	GREEN	6 M	1
MFBAG301	GREEN	9 M	1
MFBAG301	GREEN	12 M	1
MFBAG301	GREEN	24 M	1

MFBAG301 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFBAG301	BLUE	3 M	1
MFBAG301	BLUE	6 M	1
MFBAG301	BLUE	9 M	1
MFBAG301	BLUE	12 M	1
MFBAG301	BLUE	24 M	1

MFCH128 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH128	BLACK	3 M	1
MFCH128	BLACK	6 M	1
MFCH128	BLACK	9 M	1
MFCH128	BLACK	12 M	1
MFCH128	BLACK	24 M	1

MFCH128 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH128	RED	3 M	1
MFCH128	RED	6 M	1
MFCH128	RED	9 M	1
MFCH128	RED	12 M	1
MFCH128	RED	24 M	1

MFCH128 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH128	YELLOW	3 M	1
MFCH128	YELLOW	6 M	1
MFCH128	YELLOW	9 M	1
MFCH128	YELLOW	12 M	1
MFCH128	YELLOW	24 M	1

MFCH128 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH128	GREEN	3 M	1
MFCH128	GREEN	6 M	1
MFCH128	GREEN	9 M	1
MFCH128	GREEN	12 M	1
MFCH128	GREEN	24 M	1

MFCH128 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH128	BLUE	3 M	1
MFCH128	BLUE	6 M	1
MFCH128	BLUE	9 M	1
MFCH128	BLUE	12 M	1
MFCH128	BLUE	24 M	1

MFCH128 GREY			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH128	GREY	3 M	1
MFCH128	GREY	6 M	1
MFCH128	GREY	9 M	1
MFCH128	GREY	12 M	1
MFCH128	GREY	24 M	1

# Analogue Audio

## Balanced Microphone Cables: Cable Tasker C128

Connectors: Neutrik NC3FXX BAG – NC3MXX BAG



### APPLICATIONS

Supreme balanced low capacity microphone cable for audio and Broadcast, suitable for fixed installation on long distances.

### CHARACTERISTICS

**Conductors:** n. 1 O.F.C. red copper n. 1 O.F.C. tinned copper  
**Cond. insulation:** Compact PE  
**Core colours:** Transparent Waste filler between conductors  
**Shield:** Braided covering 90% O.F.C. tinned copper  
**Sheath:** PVC  
**Sheath colours:** Black, Grey, Red, Green, Blue, Yellow

## Balanced Microphone Cables: Cable Tasker C128

Connectors: Neutrik NC3FRX – NC3MXX



### APPLICATIONS

Supreme balanced low capacity microphone cable for audio and Broadcast, suitable for fixed installation on long distances.

### CHARACTERISTICS

**Conductors:** n. 1 O.F.C. red copper n. 1 O.F.C. tinned copper  
**Cond. insulation:** Compact PE  
**Core colours:** Transparent Waste filler between conductors  
**Shield:** Braided covering 90% O.F.C. tinned copper  
**Sheath:** PVC  
**Sheath colours:** Black, Grey, Red, Green, Blue, Yellow

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	ml.	Type	Kg.
C128	2	2 X 0,35 (22 AWG)	11 X 0,20	1,7	6,3	100	B	5,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
60	61	104	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	ml.	Type	Kg.
C128	2	2 X 0,35 (22 AWG)	11 X 0,20	1,7	6,3	100	B	5,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
60	61	104	49	-15/+70

MFCH128 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH128	BLACK	3 M	1
MFCH128	BLACK	6 M	1
MFCH128	BLACK	9 M	1
MFCH128	BLACK	12 M	1
MFCH128	BLACK	24 M	1

MFCH128 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH128	RED	3 M	1
MFCH128	RED	6 M	1
MFCH128	RED	9 M	1
MFCH128	RED	12 M	1
MFCH128	RED	24 M	1

MFCH128 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH128	YELLOW	3 M	1
MFCH128	YELLOW	6 M	1
MFCH128	YELLOW	9 M	1
MFCH128	YELLOW	12 M	1
MFCH128	YELLOW	24 M	1

MFCH128 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH128	GREEN	3 M	1
MFCH128	GREEN	6 M	1
MFCH128	GREEN	9 M	1
MFCH128	GREEN	12 M	1
MFCH128	GREEN	24 M	1

MFCH128 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH128	BLUE	3 M	1
MFCH128	BLUE	6 M	1
MFCH128	BLUE	9 M	1
MFCH128	BLUE	12 M	1
MFCH128	BLUE	24 M	1

MFCH128 GREY			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH128	GREY	3 M	1
MFCH128	GREY	6 M	1
MFCH128	GREY	9 M	1
MFCH128	GREY	12 M	1
MFCH128	GREY	24 M	1

MFRCH128 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFRCH128	BLACK	3 M	1
MFRCH128	BLACK	6 M	1
MFRCH128	BLACK	9 M	1
MFRCH128	BLACK	12 M	1
MFRCH128	BLACK	24 M	1

MFRCH128 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFRCH128	RED	3 M	1
MFRCH128	RED	6 M	1
MFRCH128	RED	9 M	1
MFRCH128	RED	12 M	1
MFRCH128	RED	24 M	1

MFRCH128 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFRCH128	YELLOW	3 M	1
MFRCH128	YELLOW	6 M	1
MFRCH128	YELLOW	9 M	1
MFRCH128	YELLOW	12 M	1
MFRCH128	YELLOW	24 M	1

MFRCH128 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFRCH128	GREEN	3 M	1
MFRCH128	GREEN	6 M	1
MFRCH128	GREEN	9 M	1
MFRCH128	GREEN	12 M	1
MFRCH128	GREEN	24 M	1

MFRCH128 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFRCH128	BLUE	3 M	1
MFRCH128	BLUE	6 M	1
MFRCH128	BLUE	9 M	1
MFRCH128	BLUE	12 M	1
MFRCH128	BLUE	24 M	1

MFRCH128 GREY			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFRCH128	GREY	3 M	1
MFRCH128	GREY	6 M	1
MFRCH128	GREY	9 M	1
MFRCH128	GREY	12 M	1
MFRCH128	GREY	24 M	1

# Analogue Audio

## Balanced Microphone Cables: Cable Tasker C128

Connectors: Neutrik NC3FRX BAG – NC3MXX BAG



NC3FRX

NC3MXX BAG



### APPLICATIONS

Supreme balanced low capacity microphone cable for audio and Broadcast, suitable for fixed installation on long distances.

### CHARACTERISTICS

**Conductors:** n. 1 O.F.C. red copper n. 1 O.F.C. tinned copper  
**Cond. insulation:** Compact PE  
**Core colours:** Transparent Waste filler between conductors  
**Shield:** Braided covering 90% O.F.C. tinned copper  
**Sheath:** PVC  
**Sheath colours:** Black, Grey, Red, Green, Blue, Yellow

## Balanced Microphone Cables: Cable Tasker C196

Connectors: Neutrik NC3FXX BAG – NC3MXX BAG



NC3FXX BAG

NC3MXX BAG



### APPLICATIONS

Professional balanced microphone audio cable for Broadcast, suitable for fixed installation on long distances.

### CHARACTERISTICS

**Conductors:** n. 1 O.F.C. red copper n. 1 O.F.C. tinned copper  
**Cond. insulation:** Compact PE  
**Core colours:** Transparent Inner sheath between cores and shield  
**Shield:** Braided covering 95% O.F.C. tinned copper  
**Sheath:** PVC  
**Sheath colour:** Transparent


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C128	2	2 X 0,35 (22 AWG)	11 X 0,20	1,7	6,3	100	B	5,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
60	61	104	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C196	2	2 X 0,50 (20 AWG)	16 X 0,20	2,1	7,0	100	B	6,7

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
45	56	95	49	-15/+70

MFRBAG128 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFRBAG128	BLACK	3 M	1
MFRBAG128	BLACK	6 M	1
MFRBAG128	BLACK	9 M	1
MFRBAG128	BLACK	12 M	1
MFRBAG128	BLACK	24 M	1



MFRBAG128 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFRBAG128	RED	3 M	1
MFRBAG128	RED	6 M	1
MFRBAG128	RED	9 M	1
MFRBAG128	RED	12 M	1
MFRBAG128	RED	24 M	1



MFRBAG128 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFRBAG128	YELLOW	3 M	1
MFRBAG128	YELLOW	6 M	1
MFRBAG128	YELLOW	9 M	1
MFRBAG128	YELLOW	12 M	1
MFRBAG128	YELLOW	24 M	1



MFRBAG128 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFRBAG128	GREEN	3 M	1
MFRBAG128	GREEN	6 M	1
MFRBAG128	GREEN	9 M	1
MFRBAG128	GREEN	12 M	1
MFRBAG128	GREEN	24 M	1



MFRBAG128 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFRBAG128	BLUE	3 M	1
MFRBAG128	BLUE	6 M	1
MFRBAG128	BLUE	9 M	1
MFRBAG128	BLUE	12 M	1
MFRBAG128	BLUE	24 M	1



MFRBAG128 GREY			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFRBAG128	GREY	3 M	1
MFRBAG128	GREY	6 M	1
MFRBAG128	GREY	9 M	1
MFRBAG128	GREY	12 M	1
MFRBAG128	GREY	24 M	1



MFR196 TRANSPARENT			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFR196	TRANSP.	3 M	1
MFR196	TRANSP.	6 M	1
MFR196	TRANSP.	9 M	1
MFR196	TRANSP.	12 M	1
MFR196	TRANSP.	24 M	1



# Analogue Audio

## Balanced Microphone Cables: Cable Tasker C287 Audio Quad cable

Connectors: Neutrik NC5FXX – NC5MXX



**APPLICATIONS**  
Professional audio QUAD cable for Broadcast. Cable with two pairs for double balancing between the conductors and the total shield.

**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Pair colours:** Transparent-Red, Transparent-Blue Waste filler between conductors Total taping in unweaved polyester  
**Shield:** Braided covering 100% O.F.C. tinned copper  
**Sheath:** PVC  
**Sheath colours:** Black, Grey

## Balanced Microphone Cables: Cable Tasker C280

Connectors: Neutrik NC3FXX – NP3TT-P



**APPLICATIONS**  
Balanced microphone audio cable for wiring applications.

**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile fillers between conductors Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colour:** Blue

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C287	2 X 2	mm <sup>2</sup> 2X2 X 0.22 (24 AWG)	mm. 28 X 0,10	Ø mm. 1,1	mm. 6,6	100	B	6,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	65	120	49	-15/+70


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C280	2	mm <sup>2</sup> 2X2 X 0.22 (24 AWG)	mm. 28 X 0,20	Ø mm. 1,1	mm. 4,8	100	B	3,5

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	75	160	49	-15/+70

MFCH287 GREY			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH287	GREY	3 M	1
MFCH287	GREY	6 M	1
MFCH287	GREY	9 M	1
MFCH287	GREY	12 M	1
MFCH287	GREY	18 M	1
MFCH287	GREY	24 M	1



MFCH287 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MFCH287	BLACK	3 M	1
MFCH287	BLACK	6 M	1
MFCH287	BLACK	9 M	1
MFCH287	BLACK	12 M	1
MFCH287	BLACK	18 M	1
MFCH287	BLACK	24 M	1



FXXNPPT BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXNPPT	BLACK	0.90 M	1



# Analogue Audio

## Balanced Microphone Cables: Cable Tasker C280

Connectors: Neutrik NC3MXX – NP3TT-P



**APPLICATIONS**  
Balanced microphone audio cable for wiring applications.

**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile fillers between conductors Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colour:** Blue

## Balanced Microphone Cables: Cable Tasker C280

Connectors: Neutrik NC3MXX – NP3TB-B



**APPLICATIONS**  
Balanced microphone audio cable for wiring applications.

**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile fillers between conductors Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colour:** Blue


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C280	2	mm <sup>2</sup> 2X2 X 0.22 (24 AWG)	mm. 28 X 0,20	Ø mm. 1,1	mm. 4,8	100	B	3,5

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	75	160	49	-15/+70


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C280	2	mm <sup>2</sup> 2X2 X 0.22 (24 AWG)	mm. 28 X 0,20	Ø mm. 1,1	mm. 4,8	100	B	3,5

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	75	160	49	-15/+70

MXXNPTT BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXXNPTT	BLUE	0.90 M	1



FXXNPTBB			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXXNPTBB	BLUE	1.50 M	1



# Analogue Audio

## Balanced Microphone Cables: Cable Tasker C280

Connectors: Neutrik NC3MXX – NP3TBTB-B



**APPLICATIONS**  
Balanced microphone audio cable for wiring applications.

**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile fillers between conductors Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colour:** Blue

## Balanced Microphone Cables: Cable Tasker C301

Connectors: Neutrik NP3TT-AU-B – NP3TT-AU-B



**APPLICATIONS**  
Double sheathed balanced low capacity microphone cable for audio and Broadcast. Extra flex cable with double density sheath, suitable for the realization of audio assembly.

**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile filler between conductors  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Double Sheath:** Double different density PVC  
**Sheath colours:** Black, BLue, Red, Yellow, Green


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C280	2	2x2 X 0,22 (24 AWG)	28 X 0,20	1,1	4,8	100	B	3,5

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	75	160	49	-15/+70


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C301	2	1 X 2 X 24 (0,22)	28 X 0,10	1,1	6,0	100	B	5,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	75	160	49	-15/+70

MXXNPTBB			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXXNPTBB	BLUE	1.50 M	1



BNPTTAU3 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
BNPTTAU3	BLACK	0.5 M	1
BNPTTAU3	BLACK	1.0 M	1
BNPTTAU3	BLACK	2.0 M	1
BNPTTAU3	BLACK	3.0 M	1
BNPTTAU3	BLACK	5.0 M	1




BNPTTAU3 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
BNPTTAU3	RED	0.5 M	1
BNPTTAU3	RED	1.0 M	1
BNPTTAU3	RED	2.0 M	1
BNPTTAU3	RED	3.0 M	1
BNPTTAU3	RED	5.0 M	1



BNPTTAU3 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
BNPTTAU3	YELLOW	0.5 M	1
BNPTTAU3	YELLOW	1.0 M	1
BNPTTAU3	YELLOW	2.0 M	1
BNPTTAU3	YELLOW	3.0 M	1
BNPTTAU3	YELLOW	5.0 M	1



BNPTTAU3 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
BNPTTAU3	GREEN	0.5 M	1
BNPTTAU3	GREEN	1.0 M	1
BNPTTAU3	GREEN	2.0 M	1
BNPTTAU3	GREEN	3.0 M	1
BNPTTAU3	GREEN	5.0 M	1



BNPTTAU3 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
BNPTTAU3	BLUE	0.5 M	1
BNPTTAU3	BLUE	1.0 M	1
BNPTTAU3	BLUE	2.0 M	1
BNPTTAU3	BLUE	3.0 M	1
BNPTTAU3	BLUE	5.0 M	1



# Analogue Audio

## Balanced Microphone Cables: Cable Tasker C280

Connectors: Neutrik NP3TT-1 -B – NP3TT-1 -B



NP3TT-1 -B

NP3TT-1 -B



### APPLICATIONS

Balanced microphone audio cable for wiring applications.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent  
 Textile fillers between conductors  
 Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colour:** Blue

## Balanced Microphone Cables: Cable Tasker C301

Connectors: Neutrik NC3FXX BAG – NP3X BAG



NC3FXX BAG

NP3X BAG



### APPLICATIONS

Double sheathed balanced low capacity microphone cable for audio and Broadcast. Extra flex cable with double density sheath, suitable for the realization of audio assembly.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile filler between conductors -  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Double Sheath:** Double different density PVC  
**Sheath colours:** Black, Yellow, Blue, Red, Green

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C280	2	mm <sup>2</sup> 2 X 2 X 0,22 (24 AWG)	mm. 28 X 0,20	Ø mm. 1,1	mm. 4,8	100	B	3,5

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	75	160	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C301	2	mm <sup>2</sup> 1 X 2 X 24 (0,22)	mm. 28 X 0,10	Ø mm. 1,1	mm. 6,0	100	B	5,0

CONDUCTOR RESISTANCE	CAPACITY CORE/ CORE	CAPACITY CORE/ SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	75	160	49	-15/+70

BNP3TT280 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
BNP3TT280	BLUE	0.5 M	1
BNP3TT280	BLUE	1.0 M	1
BNP3TT280	BLUE	2.0 M	1
BNP3TT280	BLUE	3.0 M	1
BNP3TT280	BLUE	5.0 M	1



FXXNP301 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXNP301	BLACK	1.0 M	1
FXXNP301	BLACK	2.0 M	1
FXXNP301	BLACK	3.0 M	1
FXXNP301	BLACK	5.0 M	1
FXXNP301	BLACK	8.0 M	1



FXXNP301 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXNP301	RED	1.0 M	1
FXXNP301	RED	2.0 M	1
FXXNP301	RED	3.0 M	1
FXXNP301	RED	5.0 M	1
FXXNP301	RED	8.0 M	1



FXXNP301 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXNP301	YELLOW	1.0 M	1
FXXNP301	YELLOW	2.0 M	1
FXXNP301	YELLOW	3.0 M	1
FXXNP301	YELLOW	5.0 M	1
FXXNP301	YELLOW	8.0 M	1



FXXNP301 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXNP301	GREEN	1.0 M	1
FXXNP301	GREEN	2.0 M	1
FXXNP301	GREEN	3.0 M	1
FXXNP301	GREEN	5.0 M	1
FXXNP301	GREEN	8.0 M	1



FXXNP301 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXNP301	BLUE	1.0 M	1
FXXNP301	BLUE	2.0 M	1
FXXNP301	BLUE	3.0 M	1
FXXNP301	BLUE	5.0 M	1
FXXNP301	BLUE	8.0 M	1



# Analogue Audio

## Balanced Microphone Cables: Cable Tasker C301

Connectors: Neutrik NC3FXX BAG – NP3RX BAG



### APPLICATIONS

Double sheathed balanced low capacity microphone cable for audio and Broadcast. Extra flex cable with double density sheath, suitable for the realization of audio assembly.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile filler between conductors -  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Double Sheath:** Double different density PVC  
**Sheath colours:** Black, Yellow, Blue, Red, Green

## Balanced Microphone Cables: Cable Tasker C301

Connectors: Neutrik NC3MXX BAG – NP3X BAG



### APPLICATIONS

Double sheathed balanced low capacity microphone cable for audio and Broadcast. Extra flex cable with double density sheath, suitable for the realization of audio assembly.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile filler between conductors  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Double Sheath:** Double different density PVC  
**Sheath colours:** Black, Yellow, Blue, Red, Green

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/ CORE	CAPACITY CORE/ SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
		mm <sup>2</sup>	mm.	Ø mm.	mm.	mt.	Type	Kg.					
C301	2	1 X 2 X 24 (0,22)	28 X 0,10	1,1	6,0	100	B	5,0	90	75	160	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/ CORE	CAPACITY CORE/ SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
		mm <sup>2</sup>	mm.	Ø mm.	mm.	mt.	Type	Kg.					
C301	2	1 X 2 X 24 (0,22)	28 X 0,10	1,1	6,0	100	B	5,0	90	75	160	49	-15/+70

FXXRX301 BLACK				
PART NR.	COLOR	LENGTH	PACK. UNIT	
FXXRX301BAG	BLACK	1.0 M	1	
FXXRX301BAG	BLACK	2.0 M	1	
FXXRX301BAG	BLACK	3.0 M	1	
FXXRX301BAG	BLACK	5.0 M	1	
FXXRX301BAG	BLACK	8.0 M	1	

FXXRX301 RED				
PART NR.	COLOR	LENGTH	PACK. UNIT	
FXXRX301	RED	1.0 M	1	
FXXRX301	RED	2.0 M	1	
FXXRX301	RED	3.0 M	1	
FXXRX301	RED	5.0 M	1	
FXXRX301	RED	8.0 M	1	

FXXRX301 YELLOW				
PART NR.	COLOR	LENGTH	PACK. UNIT	
FXXRX301	YELLOW	1.0 M	1	
FXXRX301	YELLOW	2.0 M	1	
FXXRX301	YELLOW	3.0 M	1	
FXXRX301	YELLOW	5.0 M	1	
FXXRX301	YELLOW	8.0 M	1	

FXXRX301 GREEN				
PART NR.	COLOR	LENGTH	PACK. UNIT	
FXXRX301	GREEN	1.0 M	1	
FXXRX301	GREEN	2.0 M	1	
FXXRX301	GREEN	3.0 M	1	
FXXRX301	GREEN	5.0 M	1	
FXXRX301	GREEN	8.0 M	1	

FXXRX301 BLUE				
PART NR.	COLOR	LENGTH	PACK. UNIT	
FXXRX301	BLUE	1.0 M	1	
FXXRX301	BLUE	2.0 M	1	
FXXRX301	BLUE	1.0 M	1	
FXXRX301	BLUE	3.0 M	1	
FXXRX301	BLUE	8.0 M	1	

MXXNP301 BLACK				
PART NR.	COLOR	LENGTH	PACK. UNIT	
MXXNP301BAG	BLACK	1.0 M	1	
MXXNP301BAG	BLACK	2.0 M	1	
MXXNP301BAG	BLACK	3.0 M	1	
MXXNP301BAG	BLACK	5.0 M	1	
MXXNP301BAG	BLACK	10.0 M	1	

MXXNP301 RED				
PART NR.	COLOR	LENGTH	PACK. UNIT	
MXXNP301	RED	1.0 M	1	
MXXNP301	RED	2.0 M	1	
MXXNP301	RED	3.0 M	1	
MXXNP301	RED	5.0 M	1	
MXXNP301	RED	10.0 M	1	

MXXNP301 YELLOW				
PART NR.	COLOR	LENGTH	PACK. UNIT	
MXXNP301	YELLOW	1.0 M	1	
MXXNP301	YELLOW	2.0 M	1	
MXXNP301	YELLOW	3.0 M	1	
MXXNP301	YELLOW	5.0 M	1	
MXXNP301	YELLOW	10.0 M	1	

MXXNP301 GREEN				
PART NR.	COLOR	LENGTH	PACK. UNIT	
MXXNP301	GREEN	1.0 M	1	
MXXNP301	GREEN	2.0 M	1	
MXXNP301	GREEN	3.0 M	1	
MXXNP301	GREEN	5.0 M	1	
MXXNP301	GREEN	10.0 M	1	

MXXNP301 BLUE				
PART NR.	COLOR	LENGTH	PACK. UNIT	
MXXNP301	BLUE	1.0 M	1	
MXXNP301	BLUE	2.0 M	1	
MXXNP301	BLUE	3.0 M	1	
MXXNP301	BLUE	5.0 M	1	
MXXNP301	BLUE	10.0 M	1	

# Analogue Audio

## Balanced Microphone Cables: Cable Tasker C301

Connectors: Neutrik NC3MXX BAG – NP3RX BAG



### APPLICATIONS

Double sheathed balanced low capacity microphone cable for audio and Broadcast. Extra flex cable with double density sheath, suitable for the realization of audio assembly.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile filler between conductors -  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Double Sheath:** Double different density PVC  
**Sheath colours:** Black, Yellow, Blue, Red, Green

## Unbalanced Microphone Cables: Cable Tasker C301

Connectors: Neutrik NC3FFX BAG – NP2X BAG



### APPLICATIONS

Double sheathed balanced low capacity microphone cable for audio and Broadcast. Extra flex cable with double density sheath, suitable for the realization of audio assembly.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile filler between conductors  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Double Sheath:** Double different density PVC  
**Sheath colours:** Black, Yellow, Blue, Red, Green

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C301	2	1 X 2 X 24 (0,22)	28 X 0,10	1,1	6,0	100	B	5,0

CONDUCTOR RESISTANCE	CAPACITY CORE/ CORE	CAPACITY CORE/ SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	75	160	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C301	2	1 X 2 X 24 (0,22)	28 X 0,10	1,1	6,0	100	B	5,0

CONDUCTOR RESISTANCE	CAPACITY CORE/ CORE	CAPACITY CORE/ SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	75	160	49	-15/+70

MXXRX301 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXXRX301BAG	BLACK	1.0 M	1
MXXRX301BAG	BLACK	2.0 M	1
MXXRX301BAG	BLACK	3.0 M	1
MXXRX301	BLACK	5.0 M	1
MXXRX301BAG	BLACK	10.0 M	1

MXXRX301 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXXRX301	RED	1.0 M	1
MXXRX301	RED	2.0 M	1
MXXRX301	RED	3.0 M	1
MXXRX301	RED	5.0 M	1
MXXRX301	RED	10.0 M	1

MXXRX301 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXXRX301	YELLOW	1.0 M	1
MXXRX301	YELLOW	2.0 M	1
MXXRX301	YELLOW	3.0 M	1
MXXRX301	YELLOW	5.0 M	1
MXXRX301	YELLOW	10.0 M	1

MXXRX301 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXXRX301	GREEN	1.0 M	1
MXXRX301	GREEN	2.0 M	1
MXXRX301	GREEN	3.0 M	1
MXXRX301	GREEN	5.0 M	1
MXXRX301	GREEN	10.0 M	1

MXXRX301 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXXRX301	BLUE	1.0 M	1
MXXRX301	BLUE	2.0 M	1
MXXRX301	BLUE	3.0 M	1
MXXRX301	BLUE	5.0 M	1
MXXRX301	BLUE	10.0 M	1

FXXN2301 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXN2301BAG	BLACK	1.0 M	1
FXXN2301BAG	BLACK	2.0 M	1
FXXN2301BAG	BLACK	3.0 M	1
FXXN2301BAG	BLACK	5.0 M	1
FXXN2301BAG	BLACK	10.0 M	1

FXXN2301 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXN2301	RED	1.0 M	1
FXXN2301	RED	2.0 M	1
FXXN2301	RED	3.0 M	1
FXXN2301	RED	5.0 M	1
FXXN2301	RED	10.0 M	1

FXXN2301 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXN2301	YELLOW	1.0 M	1
FXXN2301	YELLOW	2.0 M	1
FXXN2301	YELLOW	3.0 M	1
FXXN2301	YELLOW	5.0 M	1
FXXN2301	YELLOW	10.0 M	1

FXXN2301 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXN2301	GREEN	1.0 M	1
FXXN2301	GREEN	2.0 M	1
FXXN2301	GREEN	3.0 M	1
FXXN2301	GREEN	5.0 M	1
FXXN2301	GREEN	10.0 M	1

FXXN2301 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXN2301	BLUE	1.0 M	1
FXXN2301	BLUE	2.0 M	1
FXXN2301	BLUE	3.0 M	1
FXXN2301	BLUE	5.0 M	1
FXXN2301	BLUE	10.0 M	1

# Analogue Audio

## Unbalanced Microphone Cables: Cable Tasker C301

Connectors: Neutrik NC3MXX BAG – NP2X BAG



### APPLICATIONS

Double sheathed balanced low capacity microphone cable for audio and Broadcast. Extra flex cable with double density sheath, suitable for the realization of audio assembly.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile filler between conductors  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Double Sheath:** Double different density PVC  
**Sheath colours:** Black, Yellow, Blue, Red, Green

## Unbalanced Microphone Cables: Cable Tasker C301

Connectors: Neutrik NC3FXX BAG – NP2RX BAG



### APPLICATIONS

Double sheathed balanced low capacity microphone cable for audio and Broadcast. Extra flex cable with double density sheath, suitable for the realization of audio assembly.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile filler between conductors -  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Double Sheath:** Double different density PVC  
**Sheath colours:** Black, Yellow, Blue, Red, Green

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						ml.	Type	Kg.					
C301	2	1 X 2 X 24 (0,22)	28 X 0,10	1,1	6,0	100	B	5,0	90	75	160	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/ CORE	CAPACITY CORE/ SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						ml.	Type	Kg.					
C301	2	1 X 2 X 24 (0,22)	28 X 0,10	1,1	6,0	100	B	5,0	90	75	160	49	-15/+70

MXXN2301 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXXN2301BAG	BLACK	1.0 M	1
MXXN2301BAG	BLACK	2.0 M	1
MXXN2301BAG	BLACK	3.0 M	1
MXXN2301BAG	BLACK	5.0 M	1
MXXN2301BAG	BLACK	10.0 M	1

MXXN2301 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXXN2301	RED	1.0 M	1
MXXN2301	RED	2.0 M	1
MXXN2301	RED	3.0 M	1
MXXN2301	RED	5.0 M	1
MXXN2301	RED	10.0 M	1

MXXN2301 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXXN2301	YELLOW	1.0 M	1
MXXN2301	YELLOW	2.0 M	1
MXXN2301	YELLOW	3.0 M	1
MXXN2301	YELLOW	5.0 M	1
MXXN2301	YELLOW	10.0 M	1

MXXN2301 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXXN2301	GREEN	1.0 M	1
MXXN2301	GREEN	2.0 M	1
MXXN2301	GREEN	3.0 M	1
MXXN2301	GREEN	5.0 M	1
MXXN2301	GREEN	10.0 M	1

MXXN2301 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXXN2301	BLUE	1.0 M	1
MXXN2301	BLUE	2.0 M	1
MXXN2301	BLUE	3.0 M	1
MXXN2301	BLUE	5.0 M	1
MXXN2301	BLUE	10.0 M	1

FXXRX301 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXRX301BAG	BLACK	1.0 M	1
FXXRX301BAG	BLACK	2.0 M	1
FXXRX301BAG	BLACK	3.0 M	1
FXXRX301BAG	BLACK	5.0 M	1
FXXRX301BAG	BLACK	10.0 M	1

FXXRX301 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXRX301	RED	1.0 M	1
FXXRX301	RED	2.0 M	1
FXXRX301	RED	3.0 M	1
FXXRX301	RED	5.0 M	1
FXXRX301	RED	10.0 M	1

FXXRX301 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXRX301	YELLOW	1.0 M	1
FXXRX301	YELLOW	2.0 M	1
FXXRX301	YELLOW	3.0 M	1
FXXRX301	YELLOW	5.0 M	1
FXXRX301	YELLOW	10.0 M	1

FXXRX301 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXRX301	GREEN	1.0 M	1
FXXRX301	GREEN	2.0 M	1
FXXRX301	GREEN	3.0 M	1
FXXRX301	GREEN	5.0 M	1
FXXRX301	GREEN	10.0 M	1

FXXRX301 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXRX301	BLUE	1.0 M	1
FXXRX301	BLUE	2.0 M	1
FXXRX301	BLUE	3.0 M	1
FXXRX301	BLUE	5.0 M	1
FXXRX301	BLUE	10.0 M	1

# Analogue Audio

# Analogue Audio

## Unbalanced Microphone Cables: Cable Tasker C301

Connectors: Neutrik NC3MXX BAG – NP2RX BAG



### APPLICATIONS

Double sheathed balanced low capacity microphone cable for audio and Broadcast. Extra flex cable with double density sheath, suitable for the realization of audio assembly.

### CHARACTERISTICS


**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile filler between conductors -  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Double Sheath:** Double different density PVC  
**Sheath colours:** Black, Yellow, Blue, Red, Green

NC3MXX BAG

NP2RX BAG

## Balanced Microphone Cables: Cable Tasker C280

Connectors: Neutrik NP3X-B – NP3X-B

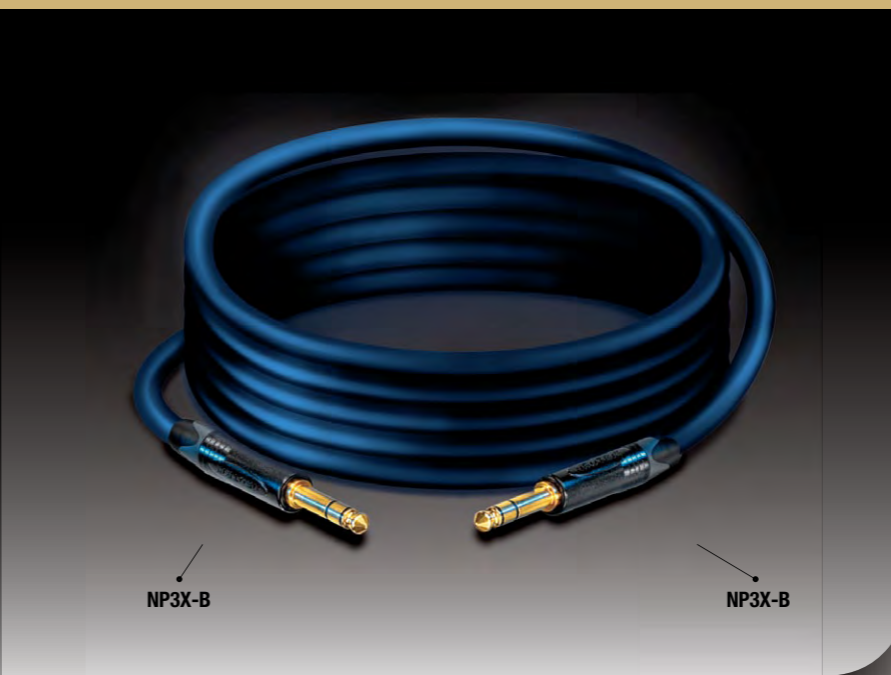

### APPLICATIONS

Balanced microphone audio cable for wiring applications.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile fillers between conductors  
**Total taping:** in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colour:** Blue

NP3X-B

NP3X-B

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	mt.	Type	Kg.
C301	2	1 X 2 X 24 (0,22)	28 X 0,10	1,1	6,0	100	B	5,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	75	160	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	mt.	Type	Kg.
C280	2	2 X 2 X 0,22 (24 AWG)	28 X 0,20	1,1	4,8	100	B	3,5

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	75	160	49	-15/+70

MXNRX301 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXNRX301BAG	BLACK	1.0 M	1
MXNRX301BAG	BLACK	2.0 M	1
MXNRX301BAG	BLACK	3.0 M	1
MXNRX301BAG	BLACK	5.0 M	1
MXNRX301BAG	BLACK	10.0 M	1

MXNRX301 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXNRX301	RED	1.0 M	1
MXNRX301	RED	2.0 M	1
MXNRX301	RED	3.0 M	1
MXNRX301	RED	5.0 M	1
MXNRX301	RED	10.0 M	1

MXNRX301 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXNRX301	YELLOW	1.0 M	1
MXNRX301	YELLOW	2.0 M	1
MXNRX301	YELLOW	3.0 M	1
MXNRX301	YELLOW	5.0 M	1
MXNRX301	YELLOW	10.0 M	1

MXNRX301 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXNRX301	GREEN	1.0 M	1
MXNRX301	GREEN	2.0 M	1
MXNRX301	GREEN	3.0 M	1
MXNRX301	GREEN	5.0 M	1
MXNRX301	GREEN	10.0 M	1

MXNRX301 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXNRX301	BLUE	1.0 M	1
MXNRX301	BLUE	2.0 M	1
MXNRX301	BLUE	3.0 M	1
MXNRX301	BLUE	5.0 M	1
MXNRX301	BLUE	10.0 M	1

NP3BNP3B BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP3BNP3B	BLUE	0.3 M	1
NP3BNP3B	BLUE	0.6 M	1
NP3BNP3B	BLUE	0.9 M	1

# Analogue Audio

## Balanced Microphone Cables: Cable Tasker C280

Connectors: Neutrik NP3RX-B – NP3RX-B



NP3RX-B

NP3RX-B



**APPLICATIONS**  
Balanced microphone audio cable for wiring applications.

**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile fillers between conductors  
 Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colour:** Blue

## Balanced Microphone Cables: Cable Tasker C280

Connectors: Neutrik NP3X-BAG – NP3X-BAG



NP3X-BAG

NP3X-BAG



**APPLICATIONS**  
Balanced microphone audio cable for wiring applications.

**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile fillers between conductors  
 Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colour:** Blue

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C280	2	mm <sup>2</sup> 2 X 2 X 0,22 (24 AWG)	mm. 28 X 0,20	Ø mm. 1,1	mm. 4,8	100	B	3,5

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	75	160	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C280	2	mm <sup>2</sup> 2 X 2 X 0,22 (24 AWG)	mm. 28 X 0,20	Ø mm. 1,1	mm. 4,8	100	B	3,5

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	75	160	49	-15/+70

NP3RXP3B BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP3RXP3B	BLUE	0.3 M	1
NP3RXP3B	BLUE	0.6 M	1
NP3RXP3B	BLUE	0.9 M	1



NP3NBAG BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP3NBAG	BLUE	0.3 M	1
NP3NBAG	BLUE	0.6 M	1
NP3NBAG	BLUE	0.9 M	1



# Analogue Audio

## Balanced Microphone Cables: Cable Tasker C301

Connectors: Neutrik NP3XB – NP3XB



### APPLICATIONS

Double sheathed balanced low capacity microphone cable for audio and Broadcast. Extra flex cable with double density sheath, suitable for the realization of audio assembly.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile filler between conductors -  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Double Sheath:** Double different density PVC  
**Sheath colours:** Black, Yellow, Blue, Red, Green

## Balanced Microphone Cables: Cable Tasker C301

Connectors: Neutrik NP3X BAG – NP3X BAG



### APPLICATIONS

Double sheathed balanced low capacity microphone cable for audio and Broadcast. Extra flex cable with double density sheath, suitable for the realization of audio assembly.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile filler between conductors  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Double Sheath:** Double different density PVC  
**Sheath colours:** Black, Yellow, Blue, Red, Green

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						ml.	Type	Kg.					
C301	2	1 X 2 X 24 (0,22)	28 X 0,10	1,1	6,0	100	B	5,0	90	75	160	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						ml.	Type	Kg.					
C301	2	1 X 2 X 24 (0,22)	28 X 0,10	1,1	6,0	100	B	5,0	90	75	160	49	-15/+70

NP3XB301 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP3XB301	BLACK	3 M	1
NP3XB301	BLACK	6 M	1
NP3XB301	BLACK	9 M	1
NP3XB301	BLACK	12 M	1
NP3XB301	BLACK	24M	1

NP3XB301 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP3XB301	RED	3 M	1
NP3XB301	RED	6 M	1
NP3XB301	RED	9 M	1
NP3XB301	RED	12 M	1
NP3XB301	RED	24 M	1

NP3XB301 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP3XB301	YELLOW	3 M	1
NP3XB301	YELLOW	6 M	1
NP3XB301	YELLOW	9 M	1
NP3XB301	YELLOW	12 M	1
NP3XB301	YELLOW	24 M	1

NP3XB301 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP3XB301	GREEN	3 M	1
NP3XB301	GREEN	6 M	1
NP3XB301	GREEN	9 M	1
NP3XB301	GREEN	12 M	1
NP3XB301	GREEN	24 M	1

NP3XB301 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP3XB301	BLUE	3 M	1
NP3XB301	BLUE	6 M	1
NP3XB301	BLUE	9 M	1
NP3XB301	BLUE	12 M	1
NP3XB301	BLUE	24 M	1

NP3XBAG BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP3XBAG	BLACK	3 M	1
NP3XBAG	BLACK	6 M	1
NP3XBAG	BLACK	9 M	1
NP3XBAG	BLACK	12 M	1
NP3XBAG	BLACK	24M	1

NP3XBAG RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP3XBAG	RED	3 M	1
NP3XBAG	RED	6 M	1
NP3XBAG	RED	9 M	1
NP3XBAG	RED	12 M	1
NP3XBAG	RED	24 M	1

NP3XBAG YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP3XBAG	YELLOW	3 M	1
NP3XBAG	YELLOW	6 M	1
NP3XBAG	YELLOW	9 M	1
NP3XBAG	YELLOW	12 M	1
NP3XBAG	YELLOW	24 M	1

NP3XBAG GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP3XBAG	GREEN	3 M	1
NP3XBAG	GREEN	6 M	1
NP3XBAG	GREEN	9 M	1
NP3XBAG	GREEN	12 M	1
NP3XBAG	GREEN	24 M	1

NP3XBAG BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP3XBAG	BLUE	3 M	1
NP3XBAG	BLUE	6 M	1
NP3XBAG	BLUE	9 M	1
NP3XBAG	BLUE	12 M	1
NP3XBAG	BLUE	24 M	1

# Analogue Audio

## Unbalanced Microphone Cables: Cable Tasker C195 Transparent

Connectors: Neutrik NP2RX-B – NP2RX-B



NP2RX-B

NP2RX-B



### APPLICATIONS

Unbalanced microphone cable and for sound reproduction.

### CHARACTERISTICS

**Conductor:** O.F.C. tinned copper  
**Cond. insulation:** Compact PE  
**Core colour:** Transparent  
**Shield:** Braided covering 100% O.F.C. tinned copper  
**Sheath:** PVC  
**Sheath colour:** Transparent

## Unbalanced Microphone Cables: Cable Tasker C199

Connectors: Neutrik NP2RX-B – NP2RX-B



NP2RX-B

NP2RX-B



### APPLICATIONS

Divisible shielded flat cable for professional head-phones and for sound reproduction. Suitable for the realization of high quality audio assembly. Low capacity cable.

### CHARACTERISTICS

**Conductors:** n. 1 O.F.C. red copper n. 1 O.F.C. tinned copper  
**Cond. insulation:** Compact PE  
**Core colours:** Transparent  
**Shields:** Braided covering 100% O.F.C. tinned copper  
**Sheath:** PVC  
**Sheath colours:** Transparent

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
C195	1	1 X 0,50 (20 AWG)	mm.	Ø mm.	mm.	100	B	4,2

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
45		130	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
C199	2	2 X 0,25 (23 AWG)	mm.	Ø mm.	mm.	100	B	6,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
75	42	130	49	-15/+70

NP2195 TRANSPARENT			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP2195	TRANSP.	0,3 M	1
NP2195	TRANSP.	0,6 M	1
NP2195	TRANSP.	0,9 M	1



NP2199 TRANSPARENT			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP2199	TRANSP.	0,5 M	1
NP2199	TRANSP.	1,0 M	1
NP2199	TRANSP.	2,0 M	1
NP2199	TRANSP.	3,0 M	1
NP2199	TRANSP.	6,0 M	1



# Analogue Audio

## Unbalanced Microphone Cables: Cable Tasker C209

Connectors: Neutrik NP2XB – NP2XB



**APPLICATIONS**  
Professional unbalanced microphone cable and for sound reproduction.

**CHARACTERISTICS**  
**Conductor:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colour:** White  
**Inner cotton:** Braided covering 95%  
**Shield:** Braided covering 95% O.F.C. tinned copper  
**Sheath:** PVC  
**Sheath colours:** Black, Red, Blue, Yellow, Green

## Unbalanced Microphone Cables: Cable Tasker C209

Connectors: Neutrik NP2RX – NP2XB



**APPLICATIONS**  
Professional unbalanced microphone cable and for sound reproduction.

**CHARACTERISTICS**  
**Conductor:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colour:** White  
**Inner cotton:** Braided covering 95%  
**Shield:** Braided covering 95% O.F.C. tinned copper  
**Sheath:** PVC  
**Sheath colours:** Black, Red, Blue, Yellow, Green

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						ml.	Type	Kg.					
C209	1	1 X 0,75 (18 AWG)	24 X 0,20	3,0	6,2	100	B	5,3	30	236	49	-15/+70	

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						ml.	Type	Kg.					
C209	1	1 X 0,75 (18 AWG)	24 X 0,20	3,0	6,2	100	B	5,3	30	236	49	-15/+70	

NP2XB209 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP2XB209	BLACK	3 M	1
NP2XB209	BLACK	6 M	1
NP2XB209	BLACK	9 M	1
NP2XB209	BLACK	12 M	1
NP2XB209	BLACK	24M	1

NP2XB209 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP2XB209	RED	3 M	1
NP2XB209	RED	6 M	1
NP2XB209	RED	9 M	1
NP2XB209	RED	12 M	1
NP2XB209	RED	24 M	1

NP2XB209 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP2XB209	YELLOW	3 M	1
NP2XB209	YELLOW	6 M	1
NP2XB209	YELLOW	9 M	1
NP2XB209	YELLOW	12 M	1
NP2XB209	YELLOW	24 M	1

NP2XB209 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP2XB209	GREEN	3 M	1
NP2XB209	GREEN	6 M	1
NP2XB209	GREEN	9 M	1
NP2XB209	GREEN	12 M	1
NP2XB209	GREEN	24 M	1

NP2XB209 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP2XB209	BLUE	3 M	1
NP2XB209	BLUE	6 M	1
NP2XB209	BLUE	9 M	1
NP2XB209	BLUE	12 M	1
NP2XB209	BLUE	24 M	1

NP2RX209 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP2RX209	BLACK	3 M	1
NP2RX209	BLACK	6 M	1
NP2RX209	BLACK	9 M	1
NP2RX209	BLACK	12 M	1
NP2RX209	BLACK	24M	1

NP2RX209 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP2RX209	RED	3 M	1
NP2RX209	RED	6 M	1
NP2RX209	RED	9 M	1
NP2RX209	RED	12 M	1
NP2RX209	RED	24 M	1

NP2RX209 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP2RX209	YELLOW	3 M	1
NP2RX209	YELLOW	6 M	1
NP2RX209	YELLOW	9 M	1
NP2RX209	YELLOW	12 M	1
NP2RX209	YELLOW	24 M	1


NP2RX209 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP2RX209	GREEN	3 M	1
NP2RX209	GREEN	6 M	1
NP2RX209	GREEN	9 M	1
NP2RX209	GREEN	12 M	1
NP2RX209	GREEN	24 M	1

NP2RX209 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP2RX209	BLUE	3 M	1
NP2RX209	BLUE	6 M	1
NP2RX209	BLUE	9 M	1
NP2RX209	BLUE	12 M	1
NP2RX209	BLUE	24 M	1

# Analogue Audio

## Flexible Guitar Cables: Cable Tasker C285

Connectors: Neutrik NP2X – NP2X

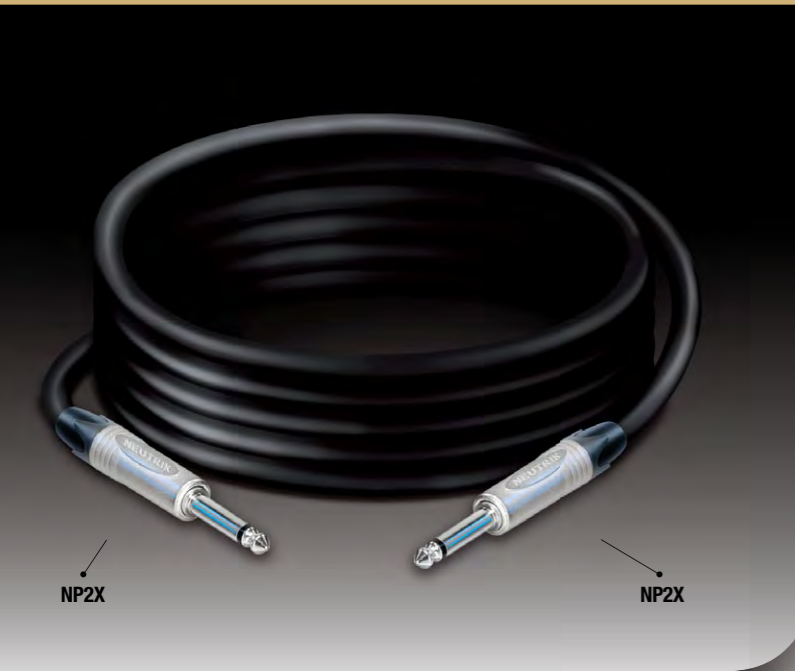

### APPLICATIONS

Flexible cable with inner sheath in conductive PVC, for guitars and musical instruments.

### CHARACTERISTICS

**Conductor:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colour:** White  
**Inner sheath:** Special conductive PVC  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colour:** Black

## Flexible Guitar Cables: Cable Tasker C285

Connectors: Neutrik NP2X-B – NP2X-B



### APPLICATIONS

Flexible cable with inner sheath in conductive PVC, for guitars and musical instruments.

### CHARACTERISTICS

**Conductor:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colour:** White  
**Inner sheath:** Special conductive PVC  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>				mm.	mm.	mt.
C285	1	1 X 0,50 (20 AWG)	7 X 0,30	1,7	6,2	100	B	4,6

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
45		110	49	-15/+70


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>				mm.	mm.	mt.
C285	1	1 X 0,50 (20 AWG)	7 X 0,30	1,7	6,2	100	B	4,6

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
45		110	49	-15/+70

TG2855 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
TG285503	BLACK	0,3 M	1
TG285506	BLACK	0,6 M	1
TG285509	BLACK	0,9 M	1
TG285512	BLACK	12 M	1



GSSAU BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
GSSAU03	BLACK	0,3 M	1
GSSAU06	BLACK	0,6 M	1
GSSAU09	BLACK	0,9 M	1
GSSAU12	BLACK	12 M	1



# Analogue Audio

## Flexible Guitar Cables: Cable Tasker C285

Connectors: Neutrik NP2X-B – NP2RX-AU-Silent



tasker® C 285

RoHS Conformity

**APPLICATIONS**  
Flexible cable with inner sheath in conductive PVC, for guitars and musical instruments.

**CHARACTERISTICS**  
Conductor: O.F.C. tinned copper  
Cond. insulation: PPE  
Core colour: White  
Inner sheath: Special conductive PVC  
Shield: Spiral covering 100% O.F.C. red copper  
Sheath: PVC  
Sheath colour: Black

## Flexible Guitar Cables: Cable Tasker C285

Connectors: Neutrik NP2X-B-CRYSTAL – Neutrik NP2X-B-CRYSTAL



tasker® C 285

RoHS Conformity

**APPLICATIONS**  
Flexible cable with inner sheath in conductive PVC, for guitars and musical instruments.

**CHARACTERISTICS**  
Conductor: O.F.C. tinned copper  
Cond. insulation: PPE  
Core colour: White  
Inner sheath: Special conductive PVC  
Shield: Spiral covering 100% O.F.C. red copper  
Sheath: PVC  
Sheath colour: Black


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
C285	1	1 X 0,50 (20 AWG)	7 X 0,30	1,7	6,2	100	B	4,6

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
45		110	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
C285	1	1 X 0,50 (20 AWG)	7 X 0,30	1,7	6,2	100	B	4,6

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
45		110	49	-15/+70

GSSAU BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
GSAUS03	BLACK	0,3 M	1
GSAUS06	BLACK	0,6 M	1
GSAUS09	BLACK	0,9 M	1
GSAUS12	BLACK	12 M	1



GSSAU BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
CRYST03	BLACK	0,3 M	1
CRYST06	BLACK	0,6 M	1
CRYST09	BLACK	0,9 M	1
CRYST12	BLACK	12 M	1



# Analogue Audio

## Carbon Screened Guitar Cables: Cable Tasker TSK1031

Connectors: Neutrik NP2X – NP2X



**APPLICATIONS**  
Professional audio cable for musical instruments, with conductive shield and high density dielectric.

**CHARACTERISTICS**  
**Conductor:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colour:** White  
**Special screen:** Carbon-PVC  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II\*  
**Sheath colour:** Blue-night

## Unbalanced Microphone Cables: Cable Tasker C220

Connectors: Neutrik 2x NF2CB – 2x NF2CB



**APPLICATIONS**  
Divisible shielded flat cable for professional head-phones and for sound reproduction. Suitable for the realization of high quality audio assembly. Low capacity cable.

**CHARACTERISTICS**  
**Conductors:** n. 1 O.F.C. red copper n. 1 O.F.C. tinned copper  
**Cond. insulation:** Compact PE  
**Core colours:** Transparent  
**Shields:** Braided covering 100% O.F.C. tinned copper  
**Sheath:** PVC  
**Sheath colours:** Black, Red, Blue, Yellow, Green

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
TSK 1031	1	1 X 0,50 (20 AWG)	16 X 0,20	4,5	7,3	100	B	6,5

CONDUCTOR RESISTANCE	CAPACITY CORE/SHIELD	TEST VOLTAGE	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	V	AC-V	°C
45	70	1000	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C220	2	2 X 0,25 (23 AWG)	8 X 0,20	1,6	5,0 X 10,3	100	B	6,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
75	42	130	49	-15/+70

TSK31 NIGHT BLUE				
PART NR.	COLOR	LENGTH	PACK. UNIT	
TSK3103	NIGHT BLUE	0.3 M	1	
TSK3106	NIGHT BLUE	0.6 M	1	
TSK3109	NIGHT BLUE	0.9 M	1	
TSK3112	NIGHT BLUE	12 M	1	

NF2CB220 BLACK				
PART NR.	COLOR	LENGTH	PACK. UNIT	
NF2CB220	BLACK	0.3 M	1	
NF2CB220	BLACK	0.6 M	1	
NF2CB220	BLACK	1.0 M	1	
NF2CB220	BLACK	2.0 M	1	
NF2CB220	BLACK	5.0 M	1	

NF2CB220 RED				
PART NR.	COLOR	LENGTH	PACK. UNIT	
NF2CB220	RED	0.3 M	1	
NF2CB220	RED	0.6 M	1	
NF2CB220	RED	1.0 M	1	
NF2CB220	RED	2.0 M	1	
NF2CB220	RED	5.0 M	1	

NF2CB220 YELLOW				
PART NR.	COLOR	LENGTH	PACK. UNIT	
NF2CB220	YELLOW	0.3 M	1	
NF2CB220	YELLOW	0.6 M	1	
NF2CB220	YELLOW	1.0 M	1	
NF2CB220	YELLOW	2.0 M	1	
NF2CB220	YELLOW	5.0 M	1	

NF2CB220 GREEN				
PART NR.	COLOR	LENGTH	PACK. UNIT	
NF2CB220	GREEN	0.3 M	1	
NF2CB220	GREEN	0.6 M	1	
NF2CB220	GREEN	1.0 M	1	
NF2CB220	GREEN	2.0 M	1	
NF2CB220	GREEN	5.0 M	1	

NF2CB220 BLUE				
PART NR.	COLOR	LENGTH	PACK. UNIT	
NF2CB220	BLUE	0.3 M	1	
NF2CB220	BLUE	0.6 M	1	
NF2CB220	BLUE	1.0 M	1	
NF2CB220	BLUE	2.0 M	1	
NF2CB220	BLUE	5.0 M	1	

# Analogue Audio

## Unbalanced Microphone Cables: Cable Tasker C121

Connectors: 2x RCA NYS – 373R +B



### APPLICATIONS

Divisible shielded flat cable for professional headphones and for sound reproduction. Suitable for the realization of high quality audio assembly. Low capacity cable.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact PE  
**Core colours:** Red, White  
**Shields:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:** Black, Red, Blue, Yellow, Green

## Unbalanced Microphone Cables: Cable Tasker C121

Connectors: Tasker 2x RCA NYS 373 – 2x NP2X -B



### APPLICATIONS

Divisible shielded flat cable for professional headphones and for sound reproduction. Suitable for the realization of high quality audio assembly. Low capacity cable.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact PE  
**Core colours:** Red, White  
**Shields:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:** Black, Red, Blue, Yellow, Green

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						ml.	Type	Kg.					
C121	2	2 X 0,25 (23 AWG)	8 X 0,20	2,3	4,5 X 9,0	100	B	5,5	75	36	96	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						ml.	Type	Kg.					
C121	2	2 X 0,25 (23 AWG)	8 X 0,20	2,3	4,5 X 9,0	100	B	5,5	75	36	96	49	-15/+70

RSP121 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
RSP121	BLACK	0,5 M	1
RSP121	BLACK	1,0 M	1
RSP121	BLACK	2,0 M	1
RSP121	BLACK	5,0 M	1
RSP121	BLACK	8,0 M	1

RSP121 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
RSP121	RED	0,5 M	1
RSP121	RED	1,0 M	1
RSP121	RED	2,0 M	1
RSP121	RED	5,0 M	1
RSP121	RED	8,0 M	1

RSP121 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
RSP121	YELLOW	0,5 M	1
RSP121	YELLOW	1,0 M	1
RSP121	YELLOW	2,0 M	1
RSP121	YELLOW	5,0 M	1
RSP121	YELLOW	8,0 M	1

RSP121 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
RSP121	GREEN	0,5 M	1
RSP121	GREEN	1,0 M	1
RSP121	GREEN	2,0 M	1
RSP121	GREEN	5,0 M	1
RSP121	GREEN	8,0 M	1

RSP121 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
RSP121	BLUE	0,5 M	1
RSP121	BLUE	1,0 M	1
RSP121	BLUE	2,0 M	1
RSP121	BLUE	5,0 M	1
RSP121	BLUE	8,0 M	1

MXMXR121 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXMXR121	BLACK	0,3 M	1
MXMXR121	BLACK	0,6 M	1
MXMXR121	BLACK	1,0 M	1
MXMXR121	BLACK	2,0 M	1
MXMXR121	BLACK	5,0 M	1

MXMXR121 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXMXR121	RED	0,3 M	1
MXMXR121	RED	0,6 M	1
MXMXR121	RED	1,0 M	1
MXMXR121	RED	2,0 M	1
MXMXR121	RED	5,0 M	1

MXMXR121 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXMXR121	YELLOW	0,3 M	1
MXMXR121	YELLOW	0,6 M	1
MXMXR121	YELLOW	1,0 M	1
MXMXR121	YELLOW	2,0 M	1
MXMXR121	YELLOW	5,0 M	1

MXMXR121 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXMXR121	GREEN	0,3 M	1
MXMXR121	GREEN	0,6 M	1
MXMXR121	GREEN	1,0 M	1
MXMXR121	GREEN	2,0 M	1
MXMXR121	GREEN	5,0 M	1

MXMXR121 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXMXR121	BLUE	0,3 M	1
MXMXR121	BLUE	0,6 M	1
MXMXR121	BLUE	1,0 M	1
MXMXR121	BLUE	2,0 M	1
MXMXR121	BLUE	5,0 M	1

# Analogue Audio

## Unbalanced Microphone Cables: Cable Tasker C118

Connectors: Tasker 2x RCA NYS 373 – 2x NC3MXX




**APPLICATIONS**  
Divisible shielded flat cable for head-phones and for sound reproduction. Suitable for the realization of audio assembly.

**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Red, Yellow  
**Shields:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:** Black, Red, Blue, Yellow, Green, White

## Unbalanced Microphone Cables: Cable Tasker C121

Connectors: 2x Neutrik NC3FXX – 2x RCA NYS 373

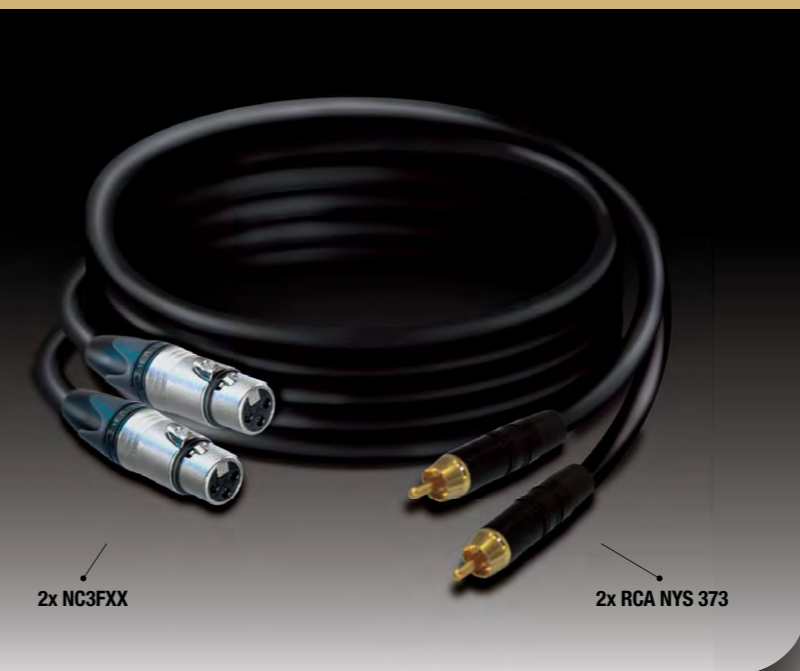

**APPLICATIONS**  
Divisible shielded flat cable for professional headphones and for sound reproduction. Suitable for the realization of high quality audio assembly. Low capacity cable.

**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact PE  
**Core colours:** Red, White  
**Shields:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:** Black, Red, Blue, Yellow, Green

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						ml.	Type	Kg.					
C118	2	2 X 0,14 (26 AWG)	18 X 0,10	1,4	2,9 X 5,8	100	B	2,8	130	65	280	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						ml.	Type	Kg.					
C121	2	2 X 0,25 (23 AWG)	8 X 0,20	2,3	4,5 X 9,0	100	B	5,5	75	36	96	49	-15/+70

MXSPR118 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXSPR118	BLACK	0.3 M	1
MXSPR118	BLACK	0.6 M	1
MXSPR118	BLACK	1.0 M	1
MXSPR118	BLACK	2.0 M	1
MXSPR118	BLACK	5.0 M	1

MXSPR118 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXSPR118	RED	0.3 M	1
MXSPR118	RED	0.6 M	1
MXSPR118	RED	1.0 M	1
MXSPR118	RED	2.0 M	1
MXSPR118	RED	5.0 M	1

MXSPR118 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXSPR118	YELLOW	0.3 M	1
MXSPR118	YELLOW	0.6 M	1
MXSPR118	YELLOW	1.0 M	1
MXSPR118	YELLOW	2.0 M	1
MXSPR118	YELLOW	5.0 M	1

MXSPR118 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXSPR118	GREEN	0.3 M	1
MXSPR118	GREEN	0.6 M	1
MXSPR118	GREEN	1.0 M	1
MXSPR118	GREEN	2.0 M	1
MXSPR118	GREEN	5.0 M	1

MXSPR118 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXSPR118	BLUE	0.3 M	1
MXSPR118	BLUE	0.6 M	1
MXSPR118	BLUE	1.0 M	1
MXSPR118	BLUE	2.0 M	1
MXSPR118	BLUE	5.0 M	1

FXXSP121 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXSP121	BLACK	0.3 M	1
FXXSP121	BLACK	0.6 M	1
FXXSP121	BLACK	1.0 M	1
FXXSP121	BLACK	2.0 M	1
FXXSP121	BLACK	5.0 M	1

FXXSP121 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXSP121	RED	0.3 M	1
FXXSP121	RED	0.6 M	1
FXXSP121	RED	1.0 M	1
FXXSP121	RED	2.0 M	1
FXXSP121	RED	5.0 M	1

FXXSP121 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXSP121	YELLOW	0.3 M	1
FXXSP121	YELLOW	0.6 M	1
FXXSP121	YELLOW	1.0 M	1
FXXSP121	YELLOW	2.0 M	1
FXXSP121	YELLOW	5.0 M	1

FXXSP121 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXSP121	GREEN	0.3 M	1
FXXSP121	GREEN	0.6 M	1
FXXSP121	GREEN	1.0 M	1
FXXSP121	GREEN	2.0 M	1
FXXSP121	GREEN	5.0 M	1


FXXSP121 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXXSP121	BLUE	0.3 M	1
FXXSP121	BLUE	0.6 M	1
FXXSP121	BLUE	1.0 M	1
FXXSP121	BLUE	2.0 M	1
FXXSP121	BLUE	5.0 M	1

# Analogue Audio

## Balanced Microphone Cables: Cable Tasker C301

Connectors: Neutrik NC3FXX BAG – NC3FXX BAG

Adapter, Groundlift, Polarity Inversion

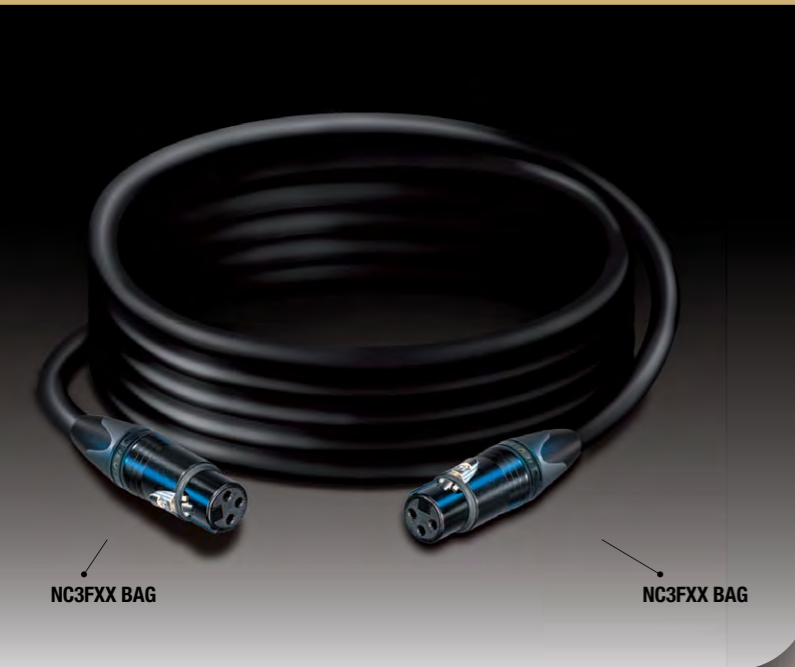

### APPLICATIONS


Double sheathed balanced low capacity microphone cable for audio and Broadcast. Extra flex cable with double density sheath, suitable for the realization of audio assembly.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Core colours:** Red, Transparent Textile filler between conductors  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Double Sheath:** Double different density PVC  
**Sheath colours:** Black

## Unbalanced Microphone Cables: Cable Tasker C121

Connectors: Neutrik NC3FXX – NC3MXX – NP3X

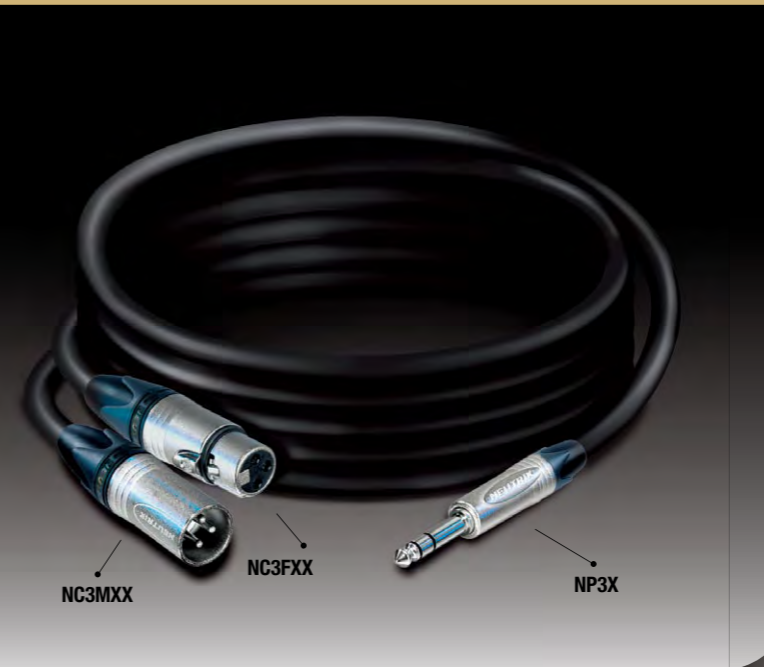

### APPLICATIONS

Divisible shielded flat cable for professional headphones and for sound reproduction. Suitable for the realization of high quality audio assembly. Low capacity cable.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact PE  
**Core colours:** Red, White  
**Shields:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:** Black, Red, Blue, Yellow, Green

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						ml.	Type	Kg.					
C301	2	1 X 2 X 24 (0,22)	28 X 0,10	1,1	6,0	100	B	5,0	90	75	160	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						ml.	Type	Kg.					
C121	2	2 X 0,25 (23 AWG)	8 X 0,20	2,3	4,5 X 9,0	100	B	5,5	75	36	96	49	-15/+70

CABLE TASKER C301 CONNECTORS NEUTRIK NC3FXX BAG – NC3FXX BAG				PART NR.	COLOR	LENGTH	PACK. UNIT	PART NR.	COLOR	LENGTH	PACK. UNIT
FXRX301BAG	BLACK	1.0 M	1								
FXRX301BAG	BLACK	2.0 M	1								
FXRX301BAG	BLACK	3.0 M	1								

CABLE TASKER C301 CONNECTORS NEUTRIK NC3FXX BAG-NC3MXX BAG WITH GROUND LIFT.				PART NR.	COLOR	LENGTH	PACK. UNIT	PART NR.	COLOR	LENGTH	PACK. UNIT
MFBAG301	BLACK	0.20 M	1								

FXMXN121 BLACK				PART NR.	COLOR	LENGTH	PACK. UNIT	FXMXN121 RED			
FXMXN121	BLACK	0.3 M	1					FXMXN121	RED	0.3 M	1
FXMXN121	BLACK	0.6 M	1	FXMXN121	RED	0.6 M	1				
FXMXN121	BLACK	1.0 M	1	FXMXN121	RED	1.0 M	1				
FXMXN121	BLACK	2.0 M	1	FXMXN121	RED	2.0 M	1				
FXMXN121	BLACK	5.0 M	1	FXMXN121	RED	5.0 M	1				

FXMXN121 YELLOW				PART NR.	COLOR	LENGTH	PACK. UNIT	FXMXN121 GREEN			
FXMXN121	YELLOW	0.3 M	1					FXMXN121	GREEN	0.3 M	1
FXMXN121	YELLOW	0.6 M	1	FXMXN121	GREEN	0.6 M	1				
FXMXN121	YELLOW	1.0 M	1	FXMXN121	GREEN	1.0 M	1				
FXMXN121	YELLOW	2.0 M	1	FXMXN121	GREEN	2.0 M	1				
FXMXN121	YELLOW	5.0 M	1	FXMXN121	GREEN	5.0 M	1				

FXMXN121 BLUE				PART NR.	COLOR	LENGTH	PACK. UNIT
FXMXN121	BLUE	0.3 M	1				
FXMXN121	BLUE	0.6 M	1	FXMXN121	BLUE	0.6 M	1
FXMXN121	BLUE	1.0 M	1	FXMXN121	BLUE	1.0 M	1
FXMXN121	BLUE	2.0 M	1	FXMXN121	BLUE	2.0 M	1
FXMXN121	BLUE	5.0 M	1	FXMXN121	BLUE	5.0 M	1

# Analogue Audio

## Balanced Microphone Cables: Cable Tasker C308

Connectors: Neutrik 4x NC3FFX BAG – 4x NC3MXX BAG – 8x NP3X BAG



### APPLICATIONS

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets. The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

## Balanced Microphone Cables: Cable Tasker C316

Connectors: Neutrik 16x NP2X BAG – 8x NP3X BAG



### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC

**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE **Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered

**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTER-NAL	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C308	8 X 2	8 X 2 X 24 (0,22 MM²)	28 X 0,20	1,0	3,0	13,0	100	B	29,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC-V	°C
90	75	160	66	49	-15/+70

FXMXN308 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXMXN308	BLACK	1.0 M	1
FXMXN308	BLACK	2.0 M	1
FXMXN308	BLACK	3.0 M	1
FXMXN308	BLACK	5.0 M	1
FXMXN308	BLACK	8.0 M	1

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
C316	16 X 2	16 X 2 X 24 (0,22)	18 X 0,10	1,0	3,0	3,0	50	6,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
130	70	125	49	-15/+70

NP2N316 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NP2N316	BLACK	1.0 M	1
NP2N316	BLACK	2.0 M	1
NP2N316	BLACK	3.0 M	1
NP2N316	BLACK	5.0 M	1
NP2N316	BLACK	8.0 M	1



# Analogue Audio

## Unbalanced Microphone Cables: Cable Tasker C118

Connectors: Neutrik 1x NP3X – 2x NP2X



### APPLICATIONS

Divisible shielded flat cable for head-phones and for sound reproduction. Suitable for the realization of audio assembly.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Red, Yellow  
**Shields:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:** Black, Red, Blue, Yellow, Green, White

## Unbalanced Microphone Cables: Cable Tasker C308

Connectors: Neutrik 8x NP2X BAG – 4x NP3X BAG



### APPLICATIONS

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets. The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						mt.	Type	Kg.					
C118	2	2 X 0,14 (26 AWG)	18 X 0,10	1,4	2,9 X 5,8	100	B	2,8	Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
									130	65	280	49	-15/+70

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE **Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered

**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT	EXTER-NAL CORE	EXTER-NAL	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C308	8 X 2	8 X 2 X 24 (0,22 MM²)	28 X 0,20	1,0	3,0	13,0	100	B	29,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC-V	°C
90	75	160	66	49	-15/+70

NPNP18 BLACK				Image	NPNP18 RED				Image
PART NR.	COLOR	LENGTH	PACK. UNIT		PART NR.	COLOR	LENGTH	PACK. UNIT	
NPNP18	BLACK	1.0 M	1	NPNP18	RED	1.0 M	1		
NPNP18	BLACK	2.0 M	1	NPNP18	RED	2.0 M	1		
NPNP18	BLACK	3.0 M	1	NPNP18	RED	3.0 M	1		
NPNP18	BLACK	4.0 M	1	NPNP18	RED	4.0 M	1		
NPNP18	BLACK	6.0 M	1	NPNP18	RED	6.0 M	1		

NPNP18 YELLOW				Image	NPNP18 GREEN				Image
PART NR.	COLOR	LENGTH	PACK. UNIT		PART NR.	COLOR	LENGTH	PACK. UNIT	
NPNP18	YELLOW	1.0 M	1	NPNP18	GREEN	1.0 M	1		
NPNP18	YELLOW	2.0 M	1	NPNP18	GREEN	2.0 M	1		
NPNP18	YELLOW	3.0 M	1	NPNP18	GREEN	3.0 M	1		
NPNP18	YELLOW	4.0 M	1	NPNP18	GREEN	4.0 M	1		
NPNP18	YELLOW	6.0 M	1	NPNP18	GREEN	6.0 M	1		

NPNP18 BLUE				Image
PART NR.	COLOR	LENGTH	PACK. UNIT	
NPNP18	BLUE	1.0 M	1	
NPNP18	BLUE	2.0 M	1	
NPNP18	BLUE	3.0 M	1	
NPNP18	BLUE	4.0 M	1	
NPNP18	BLUE	6.0 M	1	

NP3NP308 BLACK				Image
PART NR.	COLOR	LENGTH	PACK. UNIT	
NP3NP308	BLACK	1.0 M	1	
NP3NP308	BLACK	2.0 M	1	
NP3NP308	BLACK	3.0 M	1	
NP2NP308	BLACK	5.0 M	1	
NP2NP308	BLACK	8.0 M	1	

# Analogue Audio

## Unbalanced Microphone Cables: Cable Tasker C118

Connectors: Neutrik 1x NP3X – 2x NYS373




**APPLICATIONS**  
Divisible shielded flat cable for head-phones and for sound reproduction. Suitable for the realization of audio assembly.

**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Red, Yellow  
**Shields:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:** Black, Red, Blue, Yellow, Green, White

## Unbalanced Microphone Cables: Cable Tasker C118

Connectors: Neutrik 2x NP2X – 1x NYS 231L

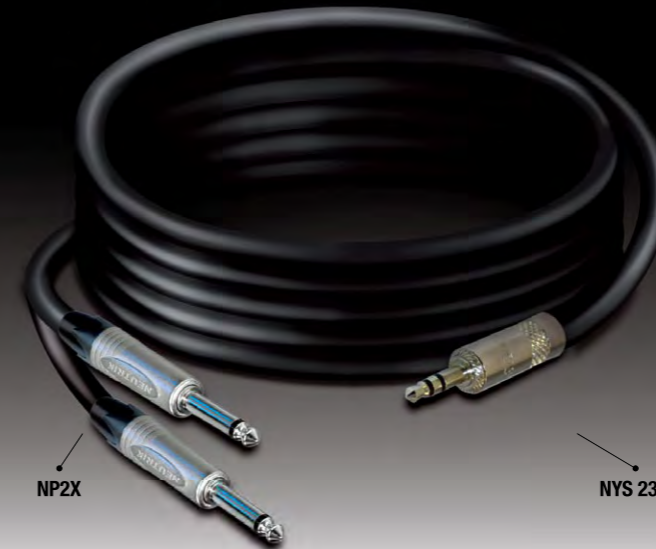

**APPLICATIONS**  
Divisible shielded flat cable for head-phones and for sound reproduction. Suitable for the realization of audio assembly.

**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Red, Yellow  
**Shields:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:** Black, Red, Blue, Yellow, Green, White

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						mm <sup>2</sup>	mm.	Ø mm.					
C118	2	2 X 0,14 (26 AWG)	18 X 0,10	1,4	2,9 X 5,8	100	B	2,8	130	65	280	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						mm <sup>2</sup>	mm.	Ø mm.					
C118	2	2 X 0,14 (26 AWG)	18 X 0,10	1,4	2,9 X 5,8	100	B	2,8	130	65	280	49	-15/+70

NPSP18 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NPSP18	BLACK	1.0 M	1
NPSP18	BLACK	2.0 M	1
NPSP18	BLACK	3.0 M	1
NPSP18	BLACK	4.0 M	1
NPSP18	BLACK	6.0 M	1

NPSP18 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
NPSP18	RED	1.0 M	1
NPSP18	RED	2.0 M	1
NPSP18	RED	3.0 M	1
NPSP18	RED	4.0 M	1
NPSP18	RED	6.0 M	1

NPSP18 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
NPSP18	YELLOW	1.0 M	1
NPSP18	YELLOW	2.0 M	1
NPSP18	YELLOW	3.0 M	1
NPSP18	YELLOW	4.0 M	1
NPSP18	YELLOW	6.0 M	1

NPSP18 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
NPSP18	GREEN	1.0 M	1
NPSP18	GREEN	2.0 M	1
NPSP18	GREEN	3.0 M	1
NPSP18	GREEN	4.0 M	1
NPSP18	GREEN	6.0 M	1

NPSP18 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
NPSP18	BLUE	1.0 M	1
NPSP18	BLUE	2.0 M	1
NPSP18	BLUE	3.0 M	1
NPSP18	BLUE	4.0 M	1
NPSP18	BLUE	6.0 M	1

NPSP55118 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NPSP55118	BLACK	1.0 M	1
NPSP55118	BLACK	2.0 M	1
NPSP55118	BLACK	3.0 M	1
NPSP55118	BLACK	4.0 M	1
NPSP55118	BLACK	6.0 M	1

NPSP55118 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
NPSP55118	RED	1.0 M	1
NPSP55118	RED	2.0 M	1
NPSP55118	RED	3.0 M	1
NPSP55118	RED	4.0 M	1
NPSP55118	RED	6.0 M	1

NPSP55118 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
NPSP55118	YELLOW	1.0 M	1
NPSP55118	YELLOW	2.0 M	1
NPSP55118	YELLOW	3.0 M	1
NPSP55118	YELLOW	4.0 M	1
NPSP55118	YELLOW	6.0 M	1

NPSP55118 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
NPSP55118	GREEN	1.0 M	1
NPSP55118	GREEN	2.0 M	1
NPSP55118	GREEN	3.0 M	1
NPSP55118	GREEN	4.0 M	1
NPSP55118	GREEN	6.0 M	1

NPSP55118 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
NPSP55118	BLUE	1.0 M	1
NPSP55118	BLUE	2.0 M	1
NPSP55118	BLUE	3.0 M	1
NPSP55118	BLUE	4.0 M	1
NPSP55118	BLUE	6.0 M	1

# Analogue Audio

## Unbalanced Microphone Cables: Cable Tasker C118

Connectors: 1x NYS 231L – 2x NYS 373



**APPLICATIONS**  
Divisible shielded flat cable for head-phones and for sound reproduction. Suitable for the realization of audio assembly.

**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Red, Yellow  
**Shields:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:** Black, Red, Blue, Yellow, Green, White

## Unbalanced Microphone Cables: Cable Tasker C118

Connectors: 1x NYS 231L – 2x Neutrik NC3FXX



**APPLICATIONS**  
Divisible shielded flat cable for head-phones and for sound reproduction. Suitable for the realization of audio assembly.

**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Red, Yellow  
**Shields:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:** Black, Red, Blue, Yellow, Green, White

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						ml.	Type	Kg.					
C118	2	2 X 0,14 (26 AWG)	18 X 0,10	1,4	2,9 X 5,8	100	B	2,8	130	65	280	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
						ml.	Type	Kg.					
C118	2	2 X 0,14 (26 AWG)	18 X 0,10	1,4	2,9 X 5,8	100	B	2,8	130	65	280	49	-15/+70

SP5562118 BLACK				PART NR.	COLOR	LENGTH	PACK. UNIT	SP5562118 RED
PART NR.	COLOR	LENGTH	PACK. UNIT					
SP5562118	BLACK	0,75 M	1	SP5562118	RED	0,75 M	1	
SP5562118	BLACK	1,50 M	1	SP5562118	RED	1,50 M	1	
SP5562118	BLACK	2,50 M	1	SP5562118	RED	2,50 M	1	
SP5562118	BLACK	5,00 M	1	SP5562118	RED	5,00 M	1	
SP5562118	BLACK	7,50 M	1	SP5562118	RED	7,50 M	1	

SP5562118 YELLOW				PART NR.	COLOR	LENGTH	PACK. UNIT	SP5562118 GREEN
PART NR.	COLOR	LENGTH	PACK. UNIT					
SP5562118	YELLOW	0,75 M	1	SP5562118	GREEN	0,75 M	1	
SP5562118	YELLOW	1,50 M	1	SP5562118	GREEN	1,50 M	1	
SP5562118	YELLOW	2,50 M	1	SP5562118	GREEN	2,50 M	1	
SP5562118	YELLOW	5,00 M	1	SP5562118	GREEN	5,00 M	1	
SP5562118	YELLOW	7,50 M	1	SP5562118	GREEN	7,50 M	1	

SP5562118 BLUE				PART NR.	COLOR	LENGTH	PACK. UNIT
PART NR.	COLOR	LENGTH	PACK. UNIT				
SP5562118	BLUE	0,75 M	1				
SP5562118	BLUE	1,50 M	1				
SP5562118	BLUE	2,50 M	1				
SP5562118	BLUE	5,00 M	1				
SP5562118	BLUE	7,50 M	1				

SP55FX118 BLACK				PART NR.	COLOR	LENGTH	PACK. UNIT	SP55FX118 RED
PART NR.	COLOR	LENGTH	PACK. UNIT					
SP55FX118	BLACK	0,75 M	1	SP55FX118	RED	0,75 M	1	
SP55FX118	BLACK	1,50 M	1	SP55FX118	RED	1,50 M	1	
SP55FX118	BLACK	2,50 M	1	SP55FX118	RED	2,50 M	1	
SP55FX118	BLACK	5,00 M	1	SP55FX118	RED	5,00 M	1	
SP55FX118	BLACK	7,50 M	1	SP55FX118	RED	7,50 M	1	

SP55FX118 YELLOW				PART NR.	COLOR	LENGTH	PACK. UNIT	SP55FX118 GREEN
PART NR.	COLOR	LENGTH	PACK. UNIT					
SP55FX118	YELLOW	0,75 M	1	SP55FX118	GREEN	0,75 M	1	
SP55FX118	YELLOW	1,50 M	1	SP55FX118	GREEN	1,50 M	1	
SP55FX118	YELLOW	2,50 M	1	SP55FX118	GREEN	2,50 M	1	
SP55FX118	YELLOW	5,00 M	1	SP55FX118	GREEN	5,00 M	1	
SP55FX118	YELLOW	7,50 M	1	SP55FX118	GREEN	7,50 M	1	

SP55FX118 BLUE				PART NR.	COLOR	LENGTH	PACK. UNIT
PART NR.	COLOR	LENGTH	PACK. UNIT				
SP55FX118	BLUE	0,75 M	1				
SP55FX118	BLUE	1,50 M	1				
SP55FX118	BLUE	2,50 M	1				
SP55FX118	BLUE	5,00 M	1				
SP55FX118	BLUE	7,50 M	1				

# Analogue Audio

## Unbalanced Microphone Cables: Cable Tasker C121

Connectors: Tasker NYS 231L – Neutrik 2x NC3MXX



### APPLICATIONS

Divisible shielded flat cable for professional headphones and for sound reproduction. Suitable for the realization of high quality audio assembly. Low capacity cable.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact PE  
**Core colours:** Red, White  
**Shields:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:** Black, Red, Blue, Yellow, Green

## Unbalanced Microphone Cables: Cable Tasker C118

Connectors: 2x NYS373 – 1x NYS372



### APPLICATIONS

Divisible shielded flat cable for head-phones and for sound reproduction. Suitable for the realization of audio assembly.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Red, Yellow  
**Shields:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:** Black, Red, Blue, Yellow, Green, White

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	mt.	Type	Kg.
C121	2	2 X 0,25 (23 AWG)	8 X 0,20	2,3	4,5 X 9,0	100	B	5,5

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
75	36	96	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	mt.	Type	Kg.
C118	2	2 X 0,14 (26 AWG)	18 X 0,10	1,4	2,9 X 5,8	100	B	2,8

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
130	65	280	49	-15/+70

SP55MX121 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MX121	BLACK	0,75 M	1
MX121	BLACK	1,50 M	1
MX121	BLACK	2,50 M	1
MX121	BLACK	5,00 M	1
MX121	BLACK	7,50 M	1

SP55MX121 RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
MX121	RED	0,75 M	1
MX121	RED	1,50 M	1
MX121	RED	2,50 M	1
MX121	RED	5,00 M	1
MX121	RED	7,50 M	1

SP55MX121 YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
MX121	YELLOW	0,75 M	1
MX121	YELLOW	1,50 M	1
MX121	YELLOW	2,50 M	1
MX121	YELLOW	5,00 M	1
MX121	YELLOW	7,50 M	1

SP55MX121 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
MX121	GREEN	0,75 M	1
MX121	GREEN	1,50 M	1
MX121	GREEN	2,50 M	1
MX121	GREEN	5,00 M	1
MX121	GREEN	7,50 M	1

SP55MX121 BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MX121	BLUE	0,75 M	1
MX121	BLUE	1,50 M	1
MX121	BLUE	2,50 M	1
MX121	BLUE	5,00 M	1
MX121	BLUE	7,50 M	1

ATTCT BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
ATTCT	BLACK	0,20 M	1

# Analogue Audio

## Unbalanced Microphone Cables: Cable Tasker C118

Connectors: 1x NYS373 – 2x NYS372



NYS373

NYS372



### APPLICATIONS

Divisible shielded flat cable for head-phones and for sound reproduction. Suitable for the realization of audio assembly.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Red, Yellow  
**Shields:** Spiral covering 100% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:** Black, Red, Blue, Yellow, Green, White

## Unbalanced Microphone Cables: Cable Tasker C220

Connectors: Neutrik 2x NC3MXX – 2x NC3FXX



NC3FXX

NC3MXX



### APPLICATIONS

Divisible shielded flat cable for professional head-phones and for sound reproduction. Suitable for the realization of high quality audio assembly. Low capacity cable.

### CHARACTERISTICS

**Conductors:** n. 1 O.F.C. red copper n. 1 O.F.C. tinned copper  
**Cond. insulation:** Compact PE  
**Core colours:** Transparent  
**Shields:** Braided covering 100% O.F.C. tinned copper  
**Sheath:** PVC  
**Sheath colours:** Red, Blue, Yellow, Green


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
C118	2	2 X 0,14 (26 AWG)	18 X 0,10	1,4	2,9 X 5,8	100	B	2,8

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
130	65	280	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
C220	2	2 X 0,25 (23 AWG)	8 X 0,20	1,6	5,0 X 10,3	100	B	6,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
75	42	130	49	-15/+70

ARTCC BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
ARTCC	BLACK	0,20 M	1



MXFXC220			
PART NR.	COLOR	LENGTH	PACK. UNIT
MXFXC220	BLACK	0,20 M	1
MXFXC220	RED	0,20 M	1
MXFXC220	YELLOW	0,20 M	1
MXFXC220	GREEN	0,20 M	1
MXFXC220	BLUE	0,20 M	1



# Note

Handwritten notes on a dotted background. The word "tasker" is written vertically in large, light gray letters, with a registered trademark symbol (®) above the 'r'. The background features horizontal dotted lines.



# Speaker Cables

Speaker Cables: Cable Tasker C265 Speaker cable

Connectors: Neutrik NP2X – NP2X



**APPLICATIONS**

Round flexible loudspeaker cables with double Conformity density sheath, suitable for speakon, banana and other audio connectors.

**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red  
**I° Sheath:** White soft PVC  
**II° Sheath:** PVC  
**Total sheath colours:** Black, Grey-pale blue

Coaxial Speaker Cables: Cable Tasker TSK 1125

Connectors: Neutrik NP2X – NP2X



**APPLICATIONS**

Coaxial shielded audio cables with same size conductor and shield, for assembly on Jack mono connectors Ø mm, 6,3 and XLR Male/Female. Anti-slot cables with sheath made in special extremely soft PVC. Cables realized for sound diffusion audio equipment, in conference rooms, offices and for Audio assemblies of racks in recording studios; for connection of professional loudspeakers, mixers during musical events, concerts, sport events and public square shows. Advised for connection of Speakon and other tasker® XLR and Jack Metal connectors.

**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact PE  
**Core colours:** Grey  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Section Shield:** mm² 2,50  
**Sheath:** Special PVC  
**Sheath colours:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C265	2	1 X 1,00 (17 AWG)	32 X 0,20	2,6	7,2	100	B	8,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
21	49	-15/+70

NPNP265 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NPNP265	BLACK	2,0 M	1
NPNP265	BLACK	3,0 M	1
NPNP265	BLACK	5,0 M	1
NPNP265	BLACK	8,0 M	1
NPNP265	BLACK	12,0 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
TSK 1125	1	1 X 0,25 (13 AWG)	128 X 0,15	3,4	6,1	100	B	

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/KM ± 5%	PF/MT	PF/MT
12		-15/+70

NPCA2500 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NPCA2502	BLACK	2 M	1
NPCA2503	BLACK	3 M	1
NPCA2505	BLACK	5 M	1
NPCA2509	BLACK	9 M	1
NPCA2512	BLACK	12 M	1
NPCA2524	BLACK	24 M	1



# Speaker Cables

## Coaxial Speaker Cables: Cable Tasker TSK1126

Connectors: Neutrik NP2X – NP2X



### APPLICATIONS

Coaxial shielded audio cables with same size conductor and shield, for assembly on Jack mono connectors Ø mm. 6,3 and XLR Male/Female. Anti-slot cables with sheath made in special extremely soft PVC. Cables realized for sound diffusion audio equipment, in conference rooms, offices and for Audio assemblies of racks in recording studios; for connection of professional loudspeakers, mixers during musical events, concerts, sport events and public square shows. Advised for connection of Speakon and other tasker® XLR and Jack Metal connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact PE  
**Core colours:** Grey  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Section Shield:** mm<sup>2</sup> 2,50  
**Sheath:** Special PVC  
**Sheath colours:** Black

## Speaker Cables: Cable Tasker C265

Connectors: Neutrik NP2X – NL4FX



### APPLICATIONS

Round flexible loudspeaker cables with double Conformity density sheath, suitable for speakon, banana and other audio connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red  
**I° Sheath:** White soft PVC  
**II° Sheath:** PVC  
**Total sheath colours:** Black, Grey-pale blue


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
C301	1	1 X 4,00 (11 AWG)	28 X 0,20	4,0	7,0			

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/KM ± 5%	PF/MT	PF/MT
6		

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
C265	2	1 X 1,00 (17 AWG)	32 X 0,20	2,6	7,2	100	B	8,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
21	49	-15/+70

NPCA2600 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NPCA2602	BLACK	2 M	1
NPCA2603	BLACK	3 M	1
NPCA2605	BLACK	5 M	1
NPCA2609	BLACK	9 M	1
NPCA2612	BLACK	12 M	1
NPCA2624	BLACK	24 M	1



NPNLF265 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NPNLF265	BLACK	2,0 M	1
NPNLF265	BLACK	3,0 M	1
NPNLF265	BLACK	5,0 M	1
NPNLF265	BLACK	8,0 M	1
NPNLF265	BLACK	12,0 M	1



# Speaker Cables

## Coaxial Speaker Cables: Cable Tasker TSK1125

Connectors: Neutrik NP2X – NL4FX



### APPLICATIONS

Coaxial shielded audio cables with same size conductor and shield, for assembly on Jack mono connectors Ø mm. 6.3 and XLR Male/Female. Anti-slot cables with sheath made in special extremely soft PVC. Cables realized for sound diffusion audio equipment, in conference rooms, offices and for Audio assemblies of racks in recording studios; for connection of professional loudspeakers, mixers during musical events, concerts, sport events and public square shows. Advised for connection of Speakon and other tasker® XLR and Jack Metal connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact PE  
**Core colours:** Grey  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Section Shield:** mm<sup>2</sup> 2,50  
**Sheath:** Special PVC  
**Sheath colours:** Black

## Speaker Cables: Cable Tasker C275

Connectors: Neutrik NL4FX – NL4FX



### APPLICATIONS

Round flexible loudspeaker cables with double density sheath, suitable for speakon, banana and other audio connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red  
**I° Sheath:** White soft PVC  
**II° Sheath:** PVC  
**Total sheath colours:** Black, Grey-pale blue


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mL	Type	Kg.
TSK 1125	1	1 X 0,25 (13 AWG)	128 X 0,15	3,4	6,1	100	B	

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/KM ± 5%	PF/MT	PF/MT
12		-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mL	Type	Kg.
C275	2	2 X 1,50 (16 AWG)	48 X 0,20	3,00	8,0	100	B	10,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
16	49	-15/+70

NPC02500 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NPC02502	BLACK	2 M	1
NPC02503	BLACK	3 M	1
NPC02505	BLACK	5 M	1
NPC02509	BLACK	9 M	1
NPC02512	BLACK	12 M	1
NPC02524	BLACK	24 M	1



NLNLF275 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NLNLF275	BLACK	2.0 M	1
NPNLF275	BLACK	3.0 M	1
NPNLF275	BLACK	5.0 M	1
NPNLF275	BLACK	8.0 M	1
NPNLF275	BLACK	12.0 M	1



# Speaker Cables

## Speaker Cables: Cable Tasker C276

Connectors: Neutrik NL4FX – NL4FX



NL4FX

NL4FX



### APPLICATIONS

Round flexible loudspeaker cables with double density sheath, suitable for speakon, banana and other audio connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red  
**I° Sheath:** White soft PVC  
**II° Sheath:** PVC  
**Total sheath colours:** Black, Grey-pale blue

## Speaker Cables: Cable Tasker C267

Connectors: Neutrik NL4FX – NL4FX



NL4FX

NL4FX



### APPLICATIONS

Round flexible loudspeaker cables with double density sheath, suitable for speakon, banana and other audio connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red  
**I° Sheath:** White soft PVC  
**II° Sheath:** PVC  
**Total sheath colours:** Black, Grey-pale blue

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
		mm <sup>2</sup>	mm.	Ø mm.	mm.			
C276	2	2 X 2,50 (13 AWG)	80 X 0,20	3,5	9,0	100	B	13,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
12	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
		mm <sup>2</sup>	mm.	Ø mm.	mm.			
C267	2	2 X 3,00 (12 AWG)	96 X 0,20	3,9	9,8	100	B	14,5

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
9	49	-15/+70

NL4FC276 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NL4FC276	BLACK	2,0 M	1
NL4FC276	BLACK	3,0 M	1
NL4FC276	BLACK	5,0 M	1
NL4FC276	BLACK	8,0 M	1
NL4FC276	BLACK	12,0 M	1
NL4FC276	BLACK	24,0 M	1



NL4FC267 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NL4FC267	BLACK	2,0 M	1
NL4FC267	BLACK	3,0 M	1
NL4FC267	BLACK	5,0 M	1
NL4FC267	BLACK	8,0 M	1
NL4FC267	BLACK	12,0 M	1
NL4FC267	BLACK	24,0 M	1



# Speaker Cables

## Speaker Cables: Cable Tasker C277

Connectors: Neutrik NL4FX – NL4FX



NL4FX

NL4FX



### APPLICATIONS

Round flexible loudspeaker cables with double density sheath, suitable for speakon, banana and other audio connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red  
**I° Sheath:** White soft PVC  
**II° Sheath:** PVC  
**Total sheath colours:** Black, Grey-pale blue

## Speaker Cables: Cable Tasker C277

Connectors: Neutrik NLT4FX – NLT4FX



NLT4FX

NLT4FX



### APPLICATIONS

Round flexible loudspeaker cables with double density sheath, suitable for speakon, banana and other audio connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red  
**I° Sheath:** White soft PVC  
**II° Sheath:** PVC  
**Total sheath colours:** Black, Grey-pale blue

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
		mm <sup>2</sup>	mm.	Ø mm.	mm.			
C277	2	2 X 4,00 (11 AWG)	128 X 0,20	4,2	10,8	50	B	8,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
6	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
		mm <sup>2</sup>	mm.	Ø mm.	mm.			
C277	2	2 X 4,00 (11 AWG)	128 X 0,20	4,2	10,8	50	B	8,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
6	49	-15/+70

NL4FC277 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NL4FC277	BLACK	2,0 M	1
NL4FC277	BLACK	3,0 M	1
NL4FC277	BLACK	5,0 M	1
NL4FC277	BLACK	8,0 M	1
NL4FC277	BLACK	12,0 M	1
NL4FC277	BLACK	24,0 M	1



NLT4X277 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NLT4X277	BLACK	2,0 M	1
NLT4X277	BLACK	3,0 M	1
NLT4X277	BLACK	5,0 M	1
NLT4X277	BLACK	8,0 M	1
NLT4X277	BLACK	12,0 M	1
NLT4X277	BLACK	24,0 M	1



# Speaker Cables

## Speaker Cables: Cable Tasker C277

Connectors: Neutrik NLT4FX BAG – NLT4FX BAG



NLT4FX BAG

NLT4FX BAG



### APPLICATIONS

Round flexible loudspeaker cables with double density sheath, suitable for speakon, banana and other audio connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red  
**I° Sheath:** White soft PVC  
**II° Sheath:** PVC  
**Total sheath colours:** Black, Grey-pale blue

## Speaker Cables: Cable Tasker C288

Connectors: Neutrik NL4FX – NL4FX



NL4FX

NL4FX



### APPLICATIONS

Round flexible loudspeaker cables suitable for speakon, banana and other audio connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red, Light-blue, Green, Yellow, Grey, Brown, Bright-orange  
**Sheath:** PVC  
**Sheath colours:** Black, Grey-pale blue


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C277	2	2 X 4,00 (11 AWG)	128 X 0,20	4,2	10,8	50	B	8,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
6	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C288	4	2 X 1,50 +2 X 2,50	80 X 0,20	3,5	10,8	100	B	23,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
12	49	-15/+70

NLT4XB277 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NLT4XB277	BLACK	2,0 M	1
NLT4XB277	BLACK	3,0 M	1
NLT4XB277	BLACK	5,0 M	1
NLT4XB277	BLACK	8,0 M	1
NLT4XB277	BLACK	12,0 M	1
NLT4XB277	BLACK	24,0 M	1




NL4FXB288 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NL4FXB288	BLACK	2,0 M	1
NL4FXB288	BLACK	3,0 M	1
NL4FXB288	BLACK	5,0 M	1
NL4FXB288	BLACK	8,0 M	1
NL4FXB288	BLACK	12,0 M	1
NL4FXB288	BLACK	24,0 M	1



# Speaker Cables

## Speaker Cables: Cable Tasker C288

Connectors: Neutrik NLT4FX – NLT4FX

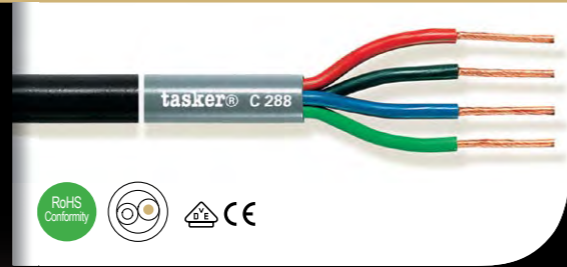

**APPLICATIONS**

Round flexible loudspeaker cables suitable for speakon, banana and other audio connectors.

**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red, Light-blue, Green, Yellow, Grey, Brown, Bright-orange  
**Sheath:** PVC  
**Sheath colours:** Black, Grey-pale blue

## Speaker Cables: Cable Tasker C288

Connectors: Neutrik NLT4FX BAG – NLT4FX BAG



**APPLICATIONS**

Round flexible loudspeaker cables suitable for speakon, banana and other audio connectors.

**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red, Light-blue, Green, Yellow, Grey, Brown, Bright-orange  
**Sheath:** PVC  
**Sheath colours:** Black, Grey-pale blue

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	ml.	Type	Kg.
C288	4	4 X 2,50	80 X 0,20	3,5	10,8	100	B	23,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
12	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	ml.	Type	Kg.
C288	4	4 X 2,50	80 X 0,20	3,5	10,8	100	B	23,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
12	49	-15/+70

NLT4FX288 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NLT4FX288	BLACK	2.0 M	1
NLT4FX288	BLACK	3.0 M	1
NLT4FX288	BLACK	5.0 M	1
NLT4FX288	BLACK	8.0 M	1
NLF4FX288	BLACK	12.0 M	1
NLF4FX288	BLACK	24.0 M	1



NLT4FB288 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NLT4FB288	BLACK	2.0 M	1
NLT4FB288	BLACK	3.0 M	1
NLT4FB288	BLACK	5.0 M	1
NLT4FB288	BLACK	8.0 M	1
NLF4FB288	BLACK	12.0 M	1
NLF4FB288	BLACK	24.0 M	1



# Speaker Cables

## Speaker Cables: Cable Tasker C279

Connectors: Neutrik NL4FX – NL4FX



NL4FX

NL4FX



### APPLICATIONS

Round flexible loudspeaker cables suitable for speakon, banana and other audio connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red, Light-blue, Green, Yellow, Grey, Brown, Bright-orange  
**Sheath:** PVC  
**Sheath colours:** Black, Grey-pale blue

## Speaker Cables: Cable Tasker C279

Connectors: Neutrik NLT4FX – NLT4FX



NLT4FX

NLT4FX



### APPLICATIONS

Round flexible loudspeaker cables suitable for speakon, banana and other audio connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red, Light-blue, Green, Yellow, Grey, Brown, Bright-orange  
**Sheath:** PVC  
**Sheath colours:** Black, Grey-pale blue

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	ml.	Type	Kg.
C279	4	4 X 4,00	128 X 0,20	4,2	13,0	100	B	36,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
6	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	ml.	Type	Kg.
C279	4	4 X 4,00	128 X 0,20	4,2	13,0	100	B	36,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
6	49	-15/+70

NL4FX279 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NL4FX279	BLACK	2.0 M	1
NL4FX279	BLACK	3.0 M	1
NL4FX279	BLACK	5.0 M	1
NL4FX279	BLACK	8.0 M	1
NL4FX279	BLACK	12.0 M	1
NL4FX279	BLACK	24.0 M	1



NLT4FX279 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NLT4FX279	BLACK	2.0 M	1
NLT4FX279	BLACK	3.0 M	1
NLT4FX279	BLACK	5.0 M	1
NLT4FX279	BLACK	8.0 M	1
NLT4FX279	BLACK	12.0 M	1
NLT4FX279	BLACK	24.0 M	1



# Speaker Cables


## Speaker Cables: Cable Tasker C279

Connectors: Neutrik NLT4FX BAG – NLT4MX BAG



NLT4FX BAG

NLT4MX BAG

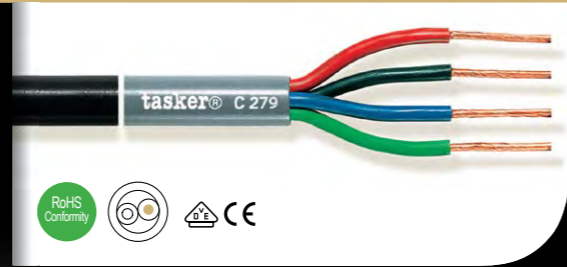

### APPLICATIONS

Round flexible loudspeaker cables suitable for speakon, banana and other audio connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red, Light-blue, Green, Yellow, Grey, Brown, Bright-orange  
**Sheath:** PVC  
**Sheath colours:** Black, Grey-pale blue

## Speaker Cables: Cable Tasker C269

Connectors: Neutrik NL8FC – NL8FC



NL8FC

NL8FC



### APPLICATIONS

Round flexible loudspeaker cables suitable for speakon, banana and other audio connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red, Light-blue, Green, Yellow, Grey, Brown, Bright-orange  
**Sheath:** PVC  
**Sheath colours:** Black, Grey-pale blue

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	ml.	Type	Kg.
C279	4	4 X 4,00	128 X 0,20	4,2	13,0	100	B	36,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
6	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	ml.	Type	Kg.
C269	8	8 X 2,50	80 X 0,20	3,5	14,0	50	B	27,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
12	49	-15/+70

NL4TFM279 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NL4TFM279	BLACK	2.0 M	1
NL4TFM279	BLACK	3.0 M	1
NL4TFM279	BLACK	5.0 M	1
NL4TFM279	BLACK	8.0 M	1
NL4TFM279	BLACK	12.0 M	1
NL4TFM279	BLACK	24.0 M	1



NL8FCB269 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NL8FCB269	BLACK	2.0 M	1
NL8FCB269	BLACK	3.0 M	1
NL8FCB269	BLACK	5.0 M	1
NL8FCB269	BLACK	8.0 M	1
NL8FCB269	BLACK	12.0 M	1
NL8FCB269	BLACK	24.0 M	1



# Speaker Cables


## Speaker Cables: Cable Tasker C269

Connectors: Neutrik NLT8FX BAG – NLT8FX BAG



NLT8FX BAG

NLT8FX BAG

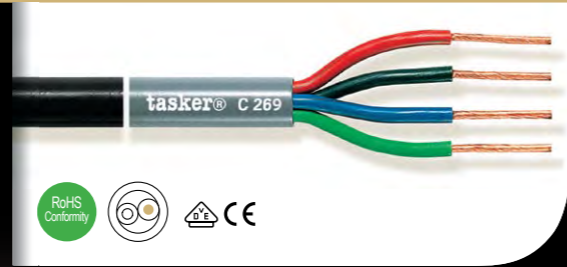

### APPLICATIONS

Round flexible loudspeaker cables suitable for speakon, banana and other audio connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red, Light-blue, Green, Yellow, Grey, Brown, Bright-orange  
**Sheath:** PVC  
**Sheath colours:** Black, Grey-pale blue

## Speaker Cables: Cable Tasker C289

Connectors: Neutrik NL8FC – NL8FC



NL8FC

NL8FC



### APPLICATIONS

Round flexible loudspeaker cables suitable for speakon, banana and other audio connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red, Light-blue, Green, Yellow, Grey, Brown, Bright-orange  
**Sheath:** PVC  
**Sheath colours:** Black, Grey-pale blue

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	ml.	Type	Kg.
C269	8	8 X 2,50	80 X 0,20	3,5	14,0	50	B	27,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
12	49	-15/+70

NL8FXB269 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NL8FXB269	BLACK	2.0 M	1
NL8FXB269	BLACK	3.0 M	1
NL8FXB269	BLACK	5.0 M	1
NL8FXB269	BLACK	8.0 M	1
NL8FXB269	BLACK	12.0 M	1
NL8FXB269	BLACK	24.0 M	1
NL8FXB269	BLACK	48.0 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	ml.	Type	Kg.
C289	4 X 4	4 X 2,50 +4 X 4,00	80 X 0,20 128 X 0,20	3,5 4,2	16,5	100	B	48,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
12 6	49	-15/+70


NL8FCB289 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NL8FCB289	BLACK	2.0 M	1
NL8FCB289	BLACK	3.0 M	1
NL8FCB289	BLACK	5.0 M	1
NL8FCB289	BLACK	8.0 M	1
NL8FCB289	BLACK	12.0 M	1
NL8FCB289	BLACK	24.0 M	1
NL8FCB289	BLACK	48.0 M	1



# Speaker Cables

## Speaker Cables: Cable Tasker C289 Speaker cable

Connectors: Neutrik NLT8FX – NLT8FX

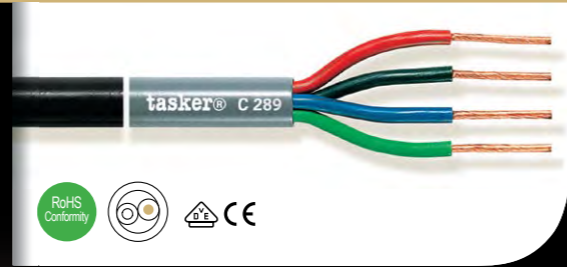

### APPLICATIONS

Round flexible loudspeaker cables suitable for speakon, banana and other audio connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red, Light-blue, Green, Yellow, Grey, Brown, Bright-orange  
**Sheath:** PVC  
**Sheath colours:** Black, Grey-pale blue

## Speaker Cables: Cable Tasker C289

Connectors: Neutrik NLT8FX BAG – NLT8FX BAG



### APPLICATIONS

Round flexible loudspeaker cables suitable for speakon, banana and other audio connectors.

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red, Light-blue, Green, Yellow, Grey, Brown, Bright-orange  
**Sheath:** PVC  
**Sheath colours:** Black, Grey-pale blue

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	ml.	Type	Kg.
C289	4 X 4	4 X 2,50 +4 X 4,00	80 X 0,20 128 X 0,20	3,5 4,2	16,5	100	B	48,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
12 6	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	ml.	Type	Kg.
C289	4 X 4	4 X 2,50 +4 X 4,00	80 X 0,20 128 X 0,20	3,5 4,2	16,5	100	B	48,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
12 6	49	-15/+70

NLT8FX289 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NLT8FX289	BLACK	2.0 M	1
NLT8FX289	BLACK	3.0 M	1
NLT8FX289	BLACK	5.0 M	1
NLT8FX289	BLACK	8.0 M	1
NLT8FX289	BLACK	12.0 M	1
NLT8FX289	BLACK	24.0 M	1
NLT8FX289	BLACK	48.0 M	1



NLT8FB289 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NLT8FB289	BLACK	2.0 M	1
NLT8FB289	BLACK	3.0 M	1
NLT8FB289	BLACK	5.0 M	1
NLT8FB289	BLACK	8.0 M	1
NLT8FB289	BLACK	12.0 M	1
NLT8FB289	BLACK	24.0 M	1
NLT8FB289	BLACK	48.0 M	1



# Speaker Cables

Speaker Cables: Cable Tasker C265

Connectors: Neutrik NL4FX – NC3MXX BAG



NL4FX

NC3MXX BAG



**APPLICATIONS**

Round flexible loudspeaker cables with double density sheath, suitable for speakon, banana and other audio connectors.

**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red  
**I° Sheath:** White soft PVC  
**II° Sheath:** PVC  
**Total sheath colours:** Black, Grey-pale blue

Speaker Cables: Cable Tasker C265

Connectors: Neutrik NL4FX – NC3FXX BAG



NL4FX

NC3FXX BAG



**APPLICATIONS**

Round flexible loudspeaker cables with double density sheath, suitable for speakon, banana and other audio connectors.

**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red  
**I° Sheath:** White soft PVC  
**II° Sheath:** PVC  
**Total sheath colours:** Black, Grey-pale blue

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	ml.	Type	Kg.
C265	2	2 X 1,00 (17 AWG)	32 X 0,20	2,6	7,2	100	B	8,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
21	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	ml.	Type	Kg.
C265	2	2 X 1,00 (17 AWG)	32 X 0,20	2,6	7,2	100	B	8,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
21	49	-15/+70

NL4FXM265 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NL4FXM265	BLACK	0.30 M	1




NL4FXF265 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NL4FXF265	BLACK	0.30 M	1



# Speaker Cables

Speaker Cables: Cable Tasker C265

Connectors: Neutrik NL4FX – NP2X BAG

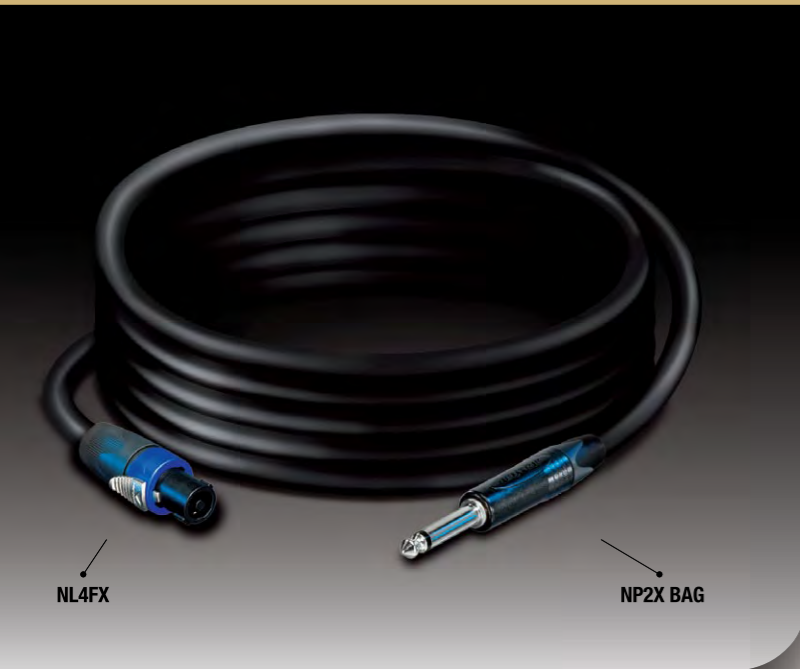

**APPLICATIONS**

Round flexible loudspeaker cables with double density sheath, suitable for speakon, banana and other audio connectors.

**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** PVC  
**Core colours:** Black, Red  
**I° Sheath:** White soft PVC  
**II° Sheath:** PVC  
**Total sheath colours:** Black, Grey-pale blue

Active speaker Cables: Cable Tasker C283

Cable Connectors: Cable Connectors Neutrik NC3MXX – NC3FXX –

Schuko plug rubber with two earthing systems CEE IP44 – CEE Connector Socket Black 16A IP44




**APPLICATIONS**

Special DMX cable composed of: -n° 1 Digital audio cable 110 Ω (A) -n° 1 Power cable (B)

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
C265	2	2 X 1,00 (17 AWG)	32 X 0,20	2,6	7,2	100	B	8,0

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD
Ω/Km ± 5%	AC-V	°C
21	49	-15/+70

NL4FNP265 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NL4FNP265	BLACK	0.30 M	1



**CHARACTERISTICS**

**A) Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
 Textile fillers between conductors  
**Drain wire:** O.F.C. tinned copper  
 Total taping in unweaved polyester

**Shield:** Spiral covering 100% O.F.C. red copper  
**Inner Sheath:** Flame Retardant PVC

**B) Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green

**Inner Sheath:** Flame Retardant PVC  
 Waste filler and PVC between elements  
 Total taping in unweaved polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	EEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C283	1 X 2	1 X 2 X 0,22 (24 AWG)	28 X 0,10	1,5	4,0	13,8	100	B	27,5
	+3	3 X 1,50 (16 AWG)	48 X 0,20	3,0	7,2				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70

DMFSHUIEC BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DMFSHUIEC	BLACK	1.0 M	1
DMFSHUIEC	BLACK	2.0 M	1
DMFSHUIEC	BLACK	3.0 M	1
DMFSHUIEC	BLACK	6.0 M	1
DMFSHUIEC	BLACK	12.0 M	1
DMFSHUIEC	BLACK	18.0 M	1
DMFSHUIEC	BLACK	24.0 M	1
DMFSHUIEC	BLACK	36.0 M	1



# Speaker Cables

Active speaker Cables: Cable Tasker C284 Cable Connectors: Neutrik 2x NC3MXX – 2x NC3FXX – Schuko plug rubber with two earthing systems CEE IP44 – CEE Connector Socket Black 16A IP44

Active speaker Cables: Cable Tasker C283 Cable Connectors: Neutrik NC3MXX – NC3FXX – Neutrik PowerCon NAC3FCA – Schuko plug rubber with two earthing systems IP44



**APPLICATIONS**  
Special DMX cables composed of: -n° 2 Digital audio cables 110 Ω (A) -n° 1 Power cable (B)



**APPLICATIONS**  
Special DMX cable composed of: -n° 1 Digital audio cable 110 Ω (A) -n° 1 Power cable (B)

**CHARACTERISTICS**

**A) Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
Textile fillers between conductors  
**Drain wire:** O.F.C. tinned copper  
Total taping in unweaved polyester

**Shields:** Spiral covering 100% O.F.C. red copper  
**Inner Sheath:** Flame Retardant PVC

**B) Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green

**Inner Sheaths:** Flame Retardant PVC  
Waste filler and PVC among elements  
Total taping in unweaved polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	EEL OR SPOOL COND.NUMBER		
							mt.	Type	Kg.
C284	2 X 2	2 X 2 X 0,22 (24 AWG)	28 X 0,10	1,5	4,0	13,8	100	B	28
	+3	3 X 1,50 (16 AWG)	48 X 0,20	3,0	7,2				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
16					

DMFSHUCEE BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DMFSHUCEE	BLACK	1.0 M	1
DMFSHUCEE	BLACK	2.0 M	1
DMFSHUCEE	BLACK	3.0 M	1
DMFSHUCEE	BLACK	6.0 M	1
DMFSHUCEE	BLACK	12.0 M	1
DMFSHUCEE	BLACK	18.0 M	1
DMFSHUCEE	BLACK	24.0 M	1
DMFSHUCEE	BLACK	32.0 M	1



**CHARACTERISTICS**

**A) Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
Textile fillers between conductors  
**Drain wire:** O.F.C. tinned copper  
Total taping in unweaved polyester

**Shield:** Spiral covering 100% O.F.C. red copper  
**Inner Sheath:** Flame Retardant PVC

**B) Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green

**Inner Sheath:** Flame Retardant PVC  
Waste filler and PVC between elements  
Total taping in unweaved polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	EEL OR SPOOL COND.NUMBER		
							mt.	Type	Kg.
C283	1 X 2	1 X 2 X 0,22 (24 AWG)	28 X 0,10	1,5	4,0	13,8	100	B	27,5
	+3	3 X 1,50 (16 AWG)	48 X 0,20	3,0	7,2				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
16					

DMFSHUPO BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DMFSHUPO	BLACK	1.0 M	1
DMFSHUPO	BLACK	2.0 M	1
DMFSHUPO	BLACK	3.0 M	1
DMFSHUPO	BLACK	6.0 M	1
DMFSHUPO	BLACK	12.0 M	1
DMFSHUPO	BLACK	18.0 M	1
DMFSHUPO	BLACK	24.0 M	1
DMFSHUPO	BLACK	36.0 M	1



# Speaker Cables

Active speaker Cables: Cable Tasker C284 Cable Connectors: Neutrik 2x NC3MXX – 2x NC3FXX – Neutrik Powercon NAC3FCA – Schuko plug rubber with two earthing systems IP44

Active speaker Cables: Cable Tasker C290 Connectors: Neutrik 2x NC3MXX – 2x NC3FXX – Schuko plug rubber with two earthing systems IP44 – CEE Connector Socket Black CEE IP44



**APPLICATIONS**  
Special DMX cables composed of: -n° 2 Digital audio cables 110 Ω (A) -n° 1 Power cable (B)



**APPLICATIONS**  
Special DMX cables composed of: -n° 2 Digital audio cables 110 Ω (A) -n° 1 Power cable (B)

**CHARACTERISTICS**

**A) Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
Textile fillers between conductors  
**Drain wire:** O.F.C. tinned copper  
Total taping in unweaved polyester

**Shields:** Spiral covering 100% O.F.C. red copper  
**Inner Sheath:** Flame Retardant PVC

**Inner Sheaths:** Flame Retardant PVC  
Waste filler and PVC among elements  
Total taping in unweaved polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

**B) Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green

**CHARACTERISTICS**

**A) Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
Textile fillers between conductors  
**Drain wire:** O.F.C. tinned copper  
Total taping in unweaved polyester

**Shields:** Spiral covering 100% O.F.C. red copper  
**Inner Sheath:** Flame Retardant PVC

**Inner Sheaths:** Flame Retardant PVC  
Waste filler and PVC among elements  
Total taping in unweaved polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

**B) Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	EEL OR SPOOL COND.NUMBER		
							mt.	Type	Kg.
C284	2 X 2	2 X 2 X 0,22 (24 AWG)	28 X 0,10	1,5	4,0	13,8	100	B	28
	+3	3 X 1,50 (16 AWG)	48 X 0,20	3,0	7,2				

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	EEL OR SPOOL COND.NUMBER		
							mt.	Type	Kg.
C290	2 X 2	2 X 2 X 0,22 (24 AWG)	28 X 0,10	1,5	4,0	13,8	100	B	
	+3	3 X 2,50 (13 AWG)	50 X 0,25	3,4	8,1				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
16					

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
12					

DM2F2SHUIEC BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DM2F2SHUIEC	BLACK	1.0 M	1
DM2F2SHUIEC	BLACK	2.0 M	1
DM2F2SHUIEC	BLACK	3.0 M	1
DM2F2SHUIEC	BLACK	6.0 M	1
DM2F2SHUIEC	BLACK	12.0 M	1
DM2F2SHUIEC	BLACK	18.0 M	1
DM2F2SHUIEC	BLACK	24.0 M	1
DM2F2SHUIEC	BLACK	32.0 M	1



DM2F2SHPOC BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DM2F2SHPOC	BLACK	1.0 M	1
DM2F2SHPOC	BLACK	2.0 M	1
DM2F2SHPOC	BLACK	3.0 M	1
DM2F2SHPOC	BLACK	6.0 M	1
DM2F2SHPOC	BLACK	12.0 M	1
DM2F2SHPOC	BLACK	18.0 M	1
DM2F2SHPOC	BLACK	24.0 M	1
DM2F2SHPOC	BLACK	32.0 M	1



# Note

tasker®


tasker®  
LIVE



# Digital AES/EBU Cables

## Digital AES/EBU Cables: Cable Tasker C800

Connectors: Neutrik NC3MXX – NC3FXX

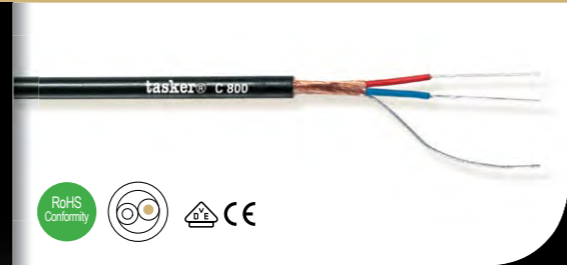

### APPLICATIONS


Extra flex digital audio cable 110 Ω AES/EBU with small diameter, suitable for inner equipment wiring and/or for miniaturized plugs.

### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
 Textile fillers between conductors  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

## Digital AES/EBU Cables: Cable Tasker C801

Connectors: Neutrik NC3MXX – NC3FXX

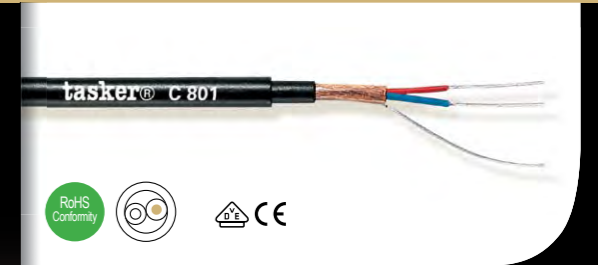

### APPLICATIONS

Extra flex digital audio cable 110 Ω AES/EBU with double sheath suitable for microphone lines or DMX.

### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
 Textile fillers between conductors  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**I° Sheath:** PVC  
**II° Sheath:** PVC  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
C800	2	2 X 24 (0,22)	28 X 0,10	1,5	4,4	100	B	3,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	75	160	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	EEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C801	1 X 2	1 X 2 X 24 (0,22)	28 X 0,10	1,5	4,4	6,2	100	B	5,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/CORE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMP.
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70

DMXXFXX81 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DMXXFXX81	BLACK	0,5 M	1
DMXXFXX82	BLACK	1,0 M	1
DMXXFXX83	BLACK	2,0 M	1
DMXXFXX84	BLACK	3,0 M	1
DMXXFXX85	BLACK	5,0 M	1
DMXXFXX86	BLACK	10,0 M	1
DMXXFXX87	BLACK	12,0 M	1




DMXXFXX801 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DMXXFXX801	BLACK	0,5 M	1
DMXXFXX801	BLACK	1,0 M	1
DMXXFXX801	BLACK	2,0 M	1
DMXXFXX801	BLACK	3,0 M	1
DMXXFXX801	BLACK	5,0 M	1
DMXXFXX801	BLACK	10,0 M	1
DMXXFXX801	BLACK	12,0 M	1
DMXXFXX801	BLACK	24,0 M	1



# Digital AES/EBU Cables

Digital AES/EBU Cables: Cable Tasker TSK1038

Connectors: Neutrik NC3MXX BAG – NC3FXX BAG

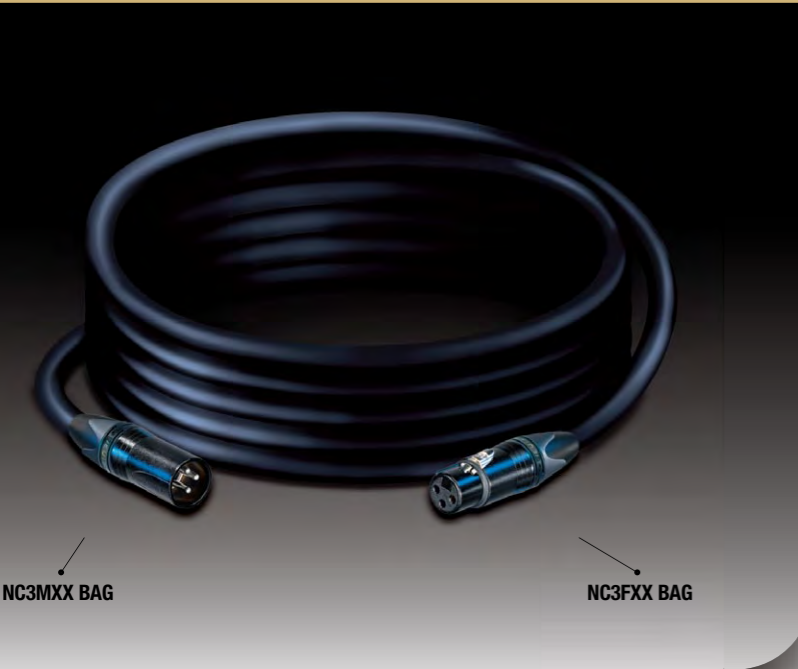


**APPLICATIONS**  
Professional digital audio cables 110 Ω AES/EBU for DMX and audio installations on long distances in big spaces as for example airports, megastores, public buildings.

**CHARACTERISTICS**  
**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
 Waste filler between conductors  
 Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Braided covering 85% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Blue-night

DMX Cables: Cable Tasker C801

Connectors: Neutrik NC3MXX BAG – NC3FXX BAG

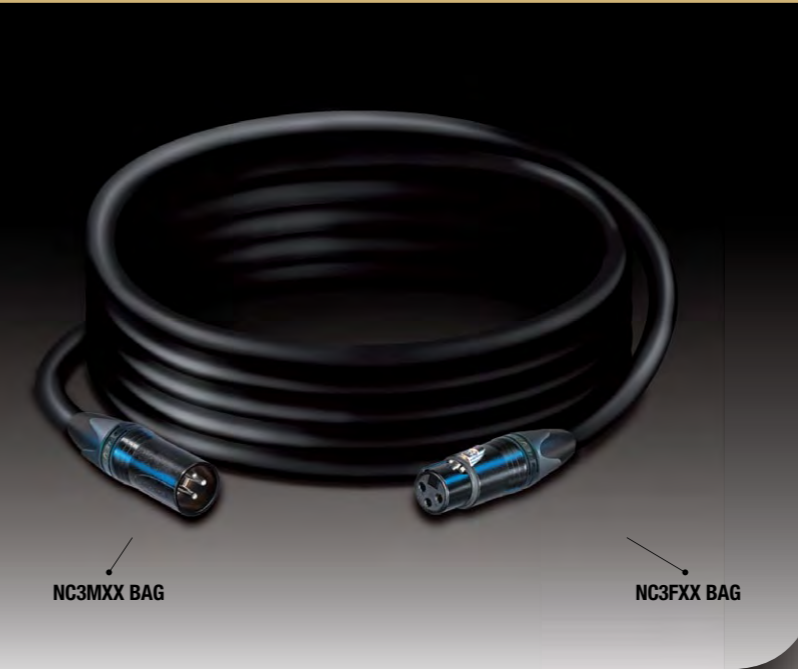

**APPLICATIONS**  
Extra flex digital audio cable 110 Ω AES/EBU with small diameter, suitable for inner equipment wiring and/or for miniaturized plugs.

**CHARACTERISTICS**  
**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
 Textile fillers between conductors  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Spiral covering 100% O.F.C. red copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
TSK 1038	2	2 X 0,35 (22 AWG)	11 X 0,20	1,6	6,3	100	B	5,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/CORE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMP.
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
60	45	90	110	49	-15/+70


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C801	2	2 X 24 (0,22)	28 X 0,10	1,5	4,4	100	B	3,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/CORE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMP.
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70

DMXXFXX1038 BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
DMXXFXX1038	BLUE NIGHT	0.5 M	1
DMXXFXX1038	BLUE NIGHT	1.0 M	1
DMXXFXX1038	BLUE NIGHT	2.0 M	1
DMXXFXX1038	BLUE NIGHT	3.0 M	1
DMXXFXX1038	BLUE NIGHT	5.0 M	1
DMXXFXX1038	BLUE NIGHT	10.0 M	1
DMXXFXX1038	BLUE NIGHT	12.0 M	1
DMXXFXX1038	BLUE NIGHT	24.0 M	1




DF3M38801 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DF3M38801	BLACK	0.30 M	1



# Digital AES/EBU Cables

Digital AES/EBU Cables: Cable Tasker TSK1039

Connectors: Neutrik NC3MXX BAG – NC3FXX BAG

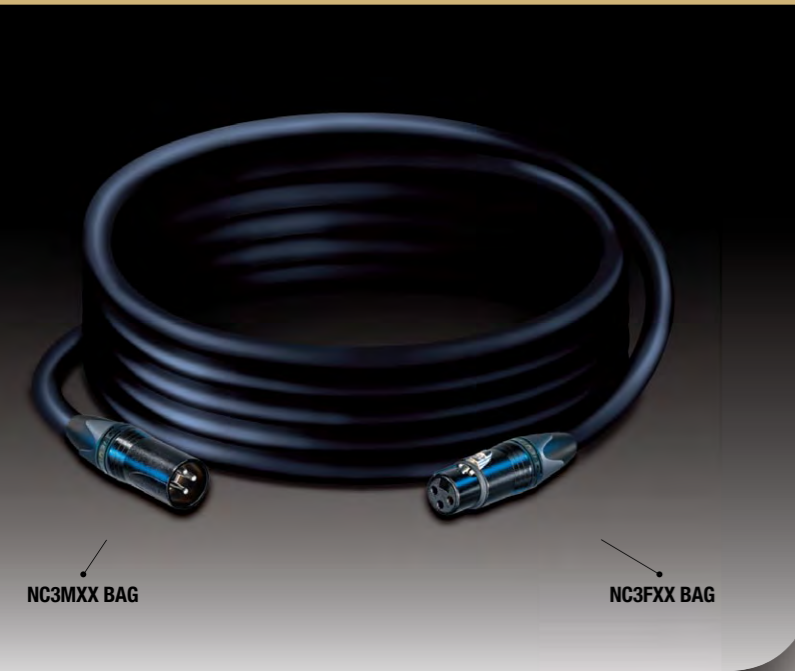

**APPLICATIONS**


Professional digital audio cables 110 Ω AES/EBU for DMX and audio installations on long distances in big spaces as for example airports, megastores, public buildings.

**CHARACTERISTICS**

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
 Waste filler between conductors  
 Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Braided covering 85% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Blue-night

Digital AES/EBU Cables: Cable Tasker TSK1040

Connectors: Neutrik NC3MXX BAG – NC3FXX BAG

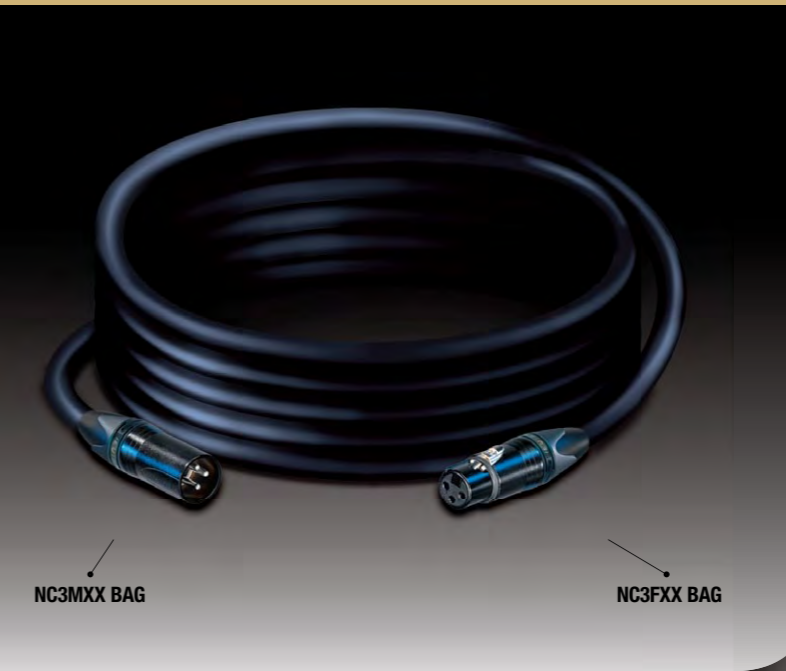

**APPLICATIONS**

Professional digital audio cables 110 Ω AES/EBU for DMX and audio installations on long distances in big spaces as for example airports, megastores, public buildings.

**CHARACTERISTICS**

**Conductors:** O.F.C. tinned copper  
**Cond. Insulation:** PPE  
**Core colours:** Red, Blue  
 Waste filler between conductors  
 Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Braided covering 85% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Blue-night

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
TSK 1039	2 COND	2 X 0,50 (20 AWG)	16 X 0,20	2,0	6,6	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/CORE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMP.
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
45	45	90	110	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
TSK 1040	2 COND	2 X 0,75 (18 AWG)	24 X 0,20	2,3	7,4	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/CORE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMP.
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
32	45	90	110	49	-15/+70

DMXXFXX1039 BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
DMXXFXX1039	BLUE NIGHT	0.5 M	1
DMXXFXX1039	BLUE NIGHT	1.0 M	1
DMXXFXX1039	BLUE NIGHT	2.0 M	1
DMXXFXX1039	BLUE NIGHT	3.0 M	1
DMXXFXX1039	BLUE NIGHT	5.0 M	1
DMXXFXX1039	BLUE NIGHT	10.0 M	1
DMXXFXX1039	BLUE NIGHT	12.0 M	1
DMXXFXX1039	BLUE NIGHT	24.0 M	1



DMXXFXX1040 BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
DMXXFXX1040	BLUE NIGHT	0.5 M	1
DMXXFXX1040	BLUE NIGHT	1.0 M	1
DMXXFXX1040	BLUE NIGHT	2.0 M	1
DMXXFXX1040	BLUE NIGHT	3.0 M	1
DMXXFXX1040	BLUE NIGHT	5.0 M	1
DMXXFXX1040	BLUE NIGHT	10.0 M	1
DMXXFXX1040	BLUE NIGHT	12.0 M	1
DMXXFXX1040	BLUE NIGHT	24.0 M	1



# Digital AES/EBU Cables

## Digital AES/EBU Cables: Cable Tasker TSK1038

Connectors: Neutrik NC3MXX – NC3FXX – Schill Cable Drum



**NC3MXX** **NC3FXX**

**APPLICATIONS**  
Professional digital audio cables 110 Ω AES/EBU for DMX and audio installations on long distances in big spaces as for example airports, megastores, public buildings.

**CHARACTERISTICS**  
**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
 Waste filler between conductors  
 Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Braided covering 85% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Blue-night

## Digital AES/EBU Cables: Cable Tasker TSK1039

Connectors: Neutrik NC3MXX – NC3FXX – Schill Cable Drum



**NC3MXX** **NC3FXX**

**APPLICATIONS**  
Professional digital audio cables 110 Ω AES/EBU for DMX and audio installations on long distances in big spaces as for example airports, megastores, public buildings.

**CHARACTERISTICS**  
**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
 Waste filler between conductors  
 Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Braided covering 85% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Blue-night


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
TSK 1038	2	2 X 0,35 (22 AWG)	11 X 0,20	1,6	6,3	100	B	5,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/CORE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMP.
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
60	45	90	110	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
TSK 1039	2	2 X 0,50 (20 AWG)	16 X 0,20	2,0	6,6	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/CORE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMP.
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
45	45	90	110	49	-15/+70

SHFXMX BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
SHFXMX10385	NIGHT BLUE	50 M	1
SHFXMX10381	NIGHT BLUE	100 M	1



SHFXMX10391 BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
SHFXMX10391	NIGHT BLUE	100 M	1
SHFXMX10392	NIGHT BLUE	200 M	1



# Digital AES/EBU Cables

## Digital AES/EBU Cables: Cable Tasker TSK1040

Connectors: Neutrik NC3MXX – NC3FXX – Schill Cable Drum



**NC3MXX** **NC3FXX**

**APPLICATIONS**  
Professional digital audio cables 110 Ω AES/EBU for DMX and audio installations on long distances in big spaces as for example airports, megastores, public buildings.

**CHARACTERISTICS**  
**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
 Waste filler between conductors  
 Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Braided covering 85% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Blue-night

## Combi Cables: Cable Tasker C283

Connectors: Neutrik NC3FXX – Schuko rubber plug – Neutrik NC3MXX – PowerCon NAC3FCA



**NC3FXX** **NC3MXX**

**APPLICATIONS**  
Special DMX cable composed of: -n° 1 Digital audio cable 110 Ω (A) -n° 1 Power cable (B)

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
TSK 1040	2	2 X 0,75 (18 AWG)	24 X 0,20	2,3	7,4	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/CORE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMP.
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
32	45	90	110	49	-15/+70

### CHARACTERISTICS


**A) Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
 Textile fillers between conductors  
**Drain wire:** O.F.C. tinned copper  
 Total taping in unweaved polyester

**Shield:** Spiral covering 100% O.F.C. red copper  
**Inner Sheath:** Flame Retardant PVC

**B) Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green

**Inner Sheath:** Flame Retardant PVC  
 Waste filler and PVC between elements  
 Total taping in unweaved polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

SHFXMX BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
SHFXMX10401	BLUE NIGHT	100 M	1
SHFXMX10402	BLUE NIGHT	200 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C283	1 X 2	1 X 2 X 0,22 (24 AWG)	28 X 0,10	1,5	4,0	13,8	100	B	27,5
	+3	3 X 1,50 (16 AWG)	48 X 0,20	3,0	7,2				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
16					

DIFXMXB283 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DIFXMXB281	BLACK	1.0 M	1
DIFXMXB282	BLACK	3.0 M	1
DIFXMXB283	BLACK	6.0 M	1
DIFXMXB284	BLACK	12.0 M	1
DIFXMXB285	BLACK	15.0 M	1
DIFXMXB286	BLACK	20.0 M	1
DIFXMXB287	BLACK	30.0 M	1



# Digital AES/EBU Cables

## Combi Cables: Cable Tasker C290

Connectors: Neutrik 2x NC3FXX – Schuko rubber plug – Neutrik 2x NC3MXX – PowerCon NAC3FCA



### APPLICATIONS

Special DMX cables composed of: -n° 2 Digital audio cables  
110 Ω (A) -n° 1 Power cable (B)

## Combi Cables: Cable Tasker C284

Connectors: Neutrik 2x NC3FXX – Schuko rubber plug – Neutrik 2x NC3MXX – CEE Connector Socket Black CEE IP44



### APPLICATIONS

Special DMX cables composed of: -n° 2 Digital audio cables  
110 Ω (A) -n° 1 Power cable (B)

### CHARACTERISTICS

**A) Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
Textile fillers between conductors  
**Drain wire:** O.F.C. tinned copper  
Total taping in unweaved polyester

**Shields:** Spiral covering 100% O.F.C. red copper  
**Inner Sheath:** Flame Retardant PVC


**B) Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green

**Inner Sheaths:** Flame Retardant PVC  
Waste filler and PVC among elements  
Total taping in unweaved polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mm.	Type	Kg.
C290	2 X 2	2 X 2 X 0,22 (24 AWG)	28 X 0,10	1,5	4,0	13,8	100	B	
	+3	3 X 2,50 (13 AWG)	50 X 0,25	3,4	8,1				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
12					

DIF2M2B283 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DIF2M2B281	BLACK	1.0 M	1
DIF2M2B282	BLACK	3.0 M	1
DIF2M2B283	BLACK	6.0 M	1
DIF2M2B284	BLACK	12.0 M	1
DIF2M2B285	BLACK	15.0 M	1
DIF2M2B286	BLACK	20.0 M	1
DIF2M2B287	BLACK	30.0 M	1



### CHARACTERISTICS

**A) Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
Textile fillers between conductors  
**Drain wire:** O.F.C. tinned copper  
Total taping in unweaved polyester

**Shields:** Spiral covering 100% O.F.C. red copper  
**Inner Sheath:** Flame Retardant PVC

**B) Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green

**Inner Sheaths:** Flame Retardant PVC  
Waste filler and PVC among elements  
Total taping in unweaved polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mm.	Type	Kg.
C284	2 X 2	2 X 2 X 0,22 (24 AWG)	28 X 0,10	1,5	4,0	13,8	100	B	28
	+3	3 X 1,50 (16 AWG)	48 X 0,20	3,0	7,2				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
16					

DIF2M2C284 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DIF1M2C284	BLACK	1.0 M	1
DIF2M2C284	BLACK	3.0 M	1
DIF2M2C284	BLACK	6.0 M	1
DIF4M2C284	BLACK	12.0 M	1
DIF5M2C284	BLACK	15.0 M	1
DIF6M2C284	BLACK	20.0 M	1
DIF7M2C284	BLACK	30.0 M	1



# Digital AES/EBU Cables

**Combi Cables:** Cable Tasker C290 **Connectors:** Neutrik 2x NC3FXX – Schuko rubber plug –

Neutrik 2x NC3MXX – CEE Connector Socket Black CEE IP44



**APPLICATIONS**  
Special DMX cables composed of: -n° 2 Digital audio cables  
110 Ω (A) -n° 1 Power cable (B)

**Combi Cables:** Cable Tasker C284

**Connectors:** Neutrik 2x NC3FXX – Schuko rubber plug – Neutrik 2x NC3MXX – Schuko rubber socket



**APPLICATIONS**  
Special DMX cables composed of: -n° 2 Digital audio cables  
110 Ω (A) -n° 1 Power cable (B)

**CHARACTERISTICS**

**A) Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
Textile fillers between conductors  
**Drain wire:** O.F.C. tinned copper  
Total taping in unweaved polyester

**Shields:** Spiral covering 100% O.F.C. red copper  
**Inner Sheath:** Flame Retardant PVC


**B) Conductors:** O.F.C. red copper  
**Cond. insulation:** FlameRetardant PVC  
**Core colours:** Brown, Blue, Yellow/green

**Inner Sheaths:** Flame Retardant PVC  
Waste filler and PVC among elements  
Total taping in unweaved polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mm <sup>2</sup>	mm.	Ø mm.
C290	2 X 2 +3	2 X 2 X 0,22 (24 AWG)	28 X 0,10	1,5	4,0	13,8	100	B	
		3 X 2,50 (13 AWG)	50 X 0,25	3,4	8,1				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/KM ± 5%	PF/MT	PF/MT	Ω	AC-V	°C
90	50	95	110	49	-15/+70
12					

DIF2M2C290 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DIF1M2C290	BLACK	1.0 M	1
DIF2M2C290	BLACK	3.0 M	1
DIF3M2C290	BLACK	6.0 M	1
DIF4M2C290	BLACK	12.0 M	1
DIF5M2C290	BLACK	15.0 M	1
DIF6M2C290	BLACK	20.0 M	1
DIF7M2C290	BLACK	30.0 M	1



**CHARACTERISTICS**

**A) Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
Textile fillers between conductors  
**Drain wire:** O.F.C. tinned copper  
Total taping in unweaved polyester

**Shields:** Spiral covering 100% O.F.C. red copper  
**Inner Sheath:** Flame Retardant PVC

**B) Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mm <sup>2</sup>	mm.	Ø mm.
C284	2 X 2 +3	2 X 2 X 0,22 (24 AWG)	28 X 0,10	1,5	4,0	13,8	100	B	28
		3 X 1,50 (16 AWG)	48 X 0,20	3,0	7,2				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
16					

DIF2M2S284 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DIF212S284	BLACK	10 M	1
DIF222S284	BLACK	20 M	1
DIF232S284	BLACK	30 M	1
DIF242S284	BLACK	40 M	1
DIF252S284	BLACK	50 M	1
DIF262S284	BLACK	60 M	1
DIF272S284	BLACK	75 M	1



# Digital AES/EBU Cables

## Combi Cables: Cable Tasker C294

Connectors: Neutrik 4x NC3FFX – Schuko rubber plug – Neutrik 4x NC3MXX – Schuko rubber socket



### APPLICATIONS

Hybrid cable composed of nr. 4 Digital Audio cables 110 Ω AES/EBU and nr. 1 Power cable. The possibility of broadcasting Audio and Power lines with a single cable offers many advantages like for example:  
 - higher speed and great time saving during laying,  
 - possibility of giving a line to every user and /or arrange future enlargement.  
 - make checking operations on the equipments easier and post-installation assistance.  
 - realise a neat and intuitive assembly - possibility of re-using the cables for several times, make the grouping easier and reducing the costs in case of short term event or fairs. This cable is suitable for BROADCAST installations, in TV and recording studios, theatres, public buildings and sport facilities, musical events, shows and public square events. The sheaths of the inner elements and the total sheath are in Flame Retardant PVC according to CEI 20-22/II°.

## Combi Cables: Cable Tasker C283 1x digital

Connectors: Neutrik NC3FFX Schuko plug – Neutrik NC3MDL1 Schuko socket – Cable Drum Schill



### APPLICATIONS

Special DMX cable composed of: -n° 1 Digital audio cable 110 Ω (A) -n° 1 Power cable (B)

### CHARACTERISTICS

#### 4X DIGITAL AUDIO CABLE

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colour:** Red, Blue  
**I° Shield:** Aluminium/Polyester tape covering 100%  
**Drain wire:** stranded in tinned copper  
**II° Shield:** Braided covering 80% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black and numbered

#### POWER CABLE

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

#### GROUPING

Waste filler between elements  
**Total tape:** Unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C294	4 X 2	1 X 2 X 0,22 (24 AWG)	7 X 0,20	1,5	4,5	19,4	100	B	27,5
		3 X 2,50 (13 AWG)	80 X 0,20	3,7	10,0				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHEATH	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
12					

DIF3M3S294S BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DIF1M3S294S	BLACK	10 M	1
DIF2M3S294S	BLACK	20 M	1
DIF3M3S294S	BLACK	30 M	1
DIF4M3S294S	BLACK	40 M	1
DIF5M3S294S	BLACK	50 M	1
DIF6M3S294S	BLACK	60 M	1
DIF7M3S294S	BLACK	75 M	1

### CHARACTERISTICS

**A) Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
 Textile fillers between conductors  
**Drain wire:** O.F.C. tinned copper  
 Total taping in unweaved polyester

**Shield:** Spiral covering 100% O.F.C. red copper  
**Inner Sheath:** Flame Retardant PVC

**B) Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green

**Inner Sheath:** Flame Retardant PVC  
 Waste filler and PVC between elements  
 Total taping in unweaved polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	EEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C283	1 X 2 +3	1 X 2 X 0,22 (24 AWG)	28 X 0,10	1,5	4,0	13,8	100	B	27,5
		3 X 1,50 (16 AWG)	48 X 0,20	3,0	7,2				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHEATH	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
16					

GFXMD25M BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
GFXMD25M	BLACK	25 M	1

# Digital AES/EBU Cables

**Combi Cables:** Cable Tasker C283 1x digital

**Connectors:** Neutrik NC3FXX Schuko plug – Neutrik NC3MDL1 Schuko socket – Cable Drum Schill



**APPLICATIONS**  
Special DMX cable composed of: -n° 1 Digital audio cable  
110 Ω (A) -n° 1 Power cable (B)

**Combi Cables:** Cable Tasker C283 1x digital

**Connectors:** Neutrik NC3FXX Schuko plug – Neutrik NC3MDL1 Schuko socket – Cable Drum Schill



**APPLICATIONS**  
Special DMX cable composed of: -n° 1 Digital audio cable  
110 Ω (A) -n° 1 Power cable (B)

**CHARACTERISTICS**

**A) Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
Textile fillers between conductors  
**Drain wire:** O.F.C. tinned copper  
Total taping in unweaved polyester

**Shield:** Spiral covering 100% O.F.C. red copper  
**Inner Sheath:** Flame Retardant PVC


**B) Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green

**Inner Sheath:** Flame Retardant PVC  
Waste filler and PVC between elements  
Total taping in unweaved polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	EEL OR SPOOL COND.NUMBER		
							mt.	Type	Kg.
C283	1 X 2	1 X 2 X 0,22 (24 AWG)	28 X 0,10	1,5	4,0	13,8	100	B	27,5
	+3	3 X 1,50 (16 AWG)	48 X 0,20	3,0	7,2				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
16					

GFXMD50M BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
GFXMD50M	BLACK	50 M	1



**CHARACTERISTICS**

**A) Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
Textile fillers between conductors  
**Drain wire:** O.F.C. tinned copper  
Total taping in unweaved polyester

**Shield:** Spiral covering 100% O.F.C. red copper  
**Inner Sheath:** Flame Retardant PVC


**B) Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green

**Inner Sheath:** Flame Retardant PVC  
Waste filler and PVC between elements  
Total taping in unweaved polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	EEL OR SPOOL COND.NUMBER		
							mt.	Type	Kg.
C283	1 X 2	1 X 2 X 0,22 (24 AWG)	28 X 0,10	1,5	4,0	13,8	100	B	27,5
	+3	3 X 1,50 (16 AWG)	48 X 0,20	3,0	7,2				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
16					

GFXMD75M BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
GFXMD75M	BLACK	75 M	1



# Digital AES/EBU Cables

## Combi Cables: Cable Tasker C294

Connectors: Neutrik 4x NC3FFX Schuko plug – Neutrik 4x NC3MDL1 Schuko socket – Cable Drum Schill




### APPLICATIONS

Hybrid cable composed of nr. 4 Digital Audio cables 110 Ω AES/EBU and nr. 1 Power cable. The possibility of broadcasting Audio and Power lines with a single cable offers many advantages like for example:

- higher speed and great time saving during laying,
- possibility of giving a line to every user and /or arrange future enlargement.
- make checking operations on the equipments easier and post-installation assistance.
- realise a neat and intuitive assembly - possibility of re-using the cables for several times, make the grouping easier and reducing the costs in case of short term event or fairs. This cable is suitable for BROADCAST installations, in TV and recording studios, theatres, public buildings and sport facilities, musical events, shows and public square events. The sheaths of the inner elements and the total sheath are in Flame Retardant PVC according to CEI 20-22/II°.

## Combi Cables: Cable Tasker C294

Connectors: Neutrik 4x NC3FFX Schuko plug – Neutrik 4x NC3MDL1 Schuko socket – Cable Drum Schill

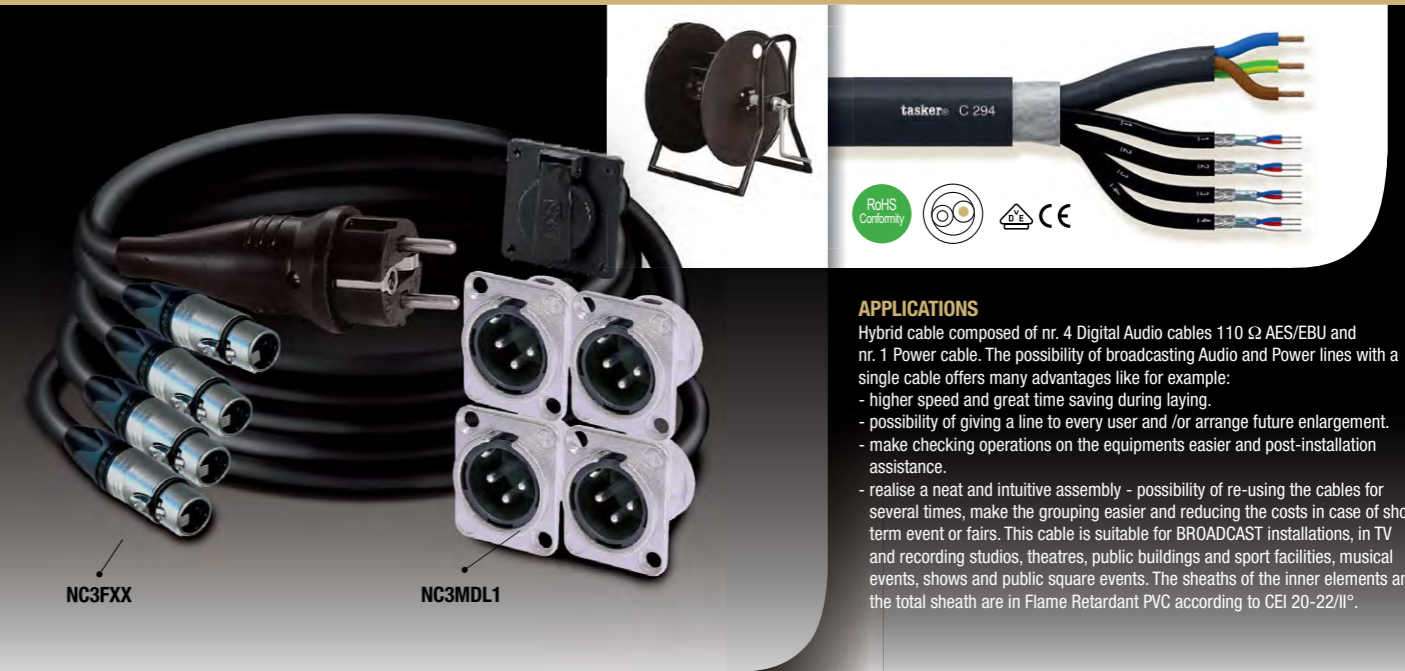

### APPLICATIONS

Hybrid cable composed of nr. 4 Digital Audio cables 110 Ω AES/EBU and nr. 1 Power cable. The possibility of broadcasting Audio and Power lines with a single cable offers many advantages like for example:

- higher speed and great time saving during laying,
- possibility of giving a line to every user and /or arrange future enlargement.
- make checking operations on the equipments easier and post-installation assistance.
- realise a neat and intuitive assembly - possibility of re-using the cables for several times, make the grouping easier and reducing the costs in case of short term event or fairs. This cable is suitable for BROADCAST installations, in TV and recording studios, theatres, public buildings and sport facilities, musical events, shows and public square events. The sheaths of the inner elements and the total sheath are in Flame Retardant PVC according to CEI 20-22/II°.

### CHARACTERISTICS

#### 4X DIGITAL AUDIO CABLE:

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colour:** Red, Blue  
**I° Shield:** Aluminium/Polyester tape covering 100%  
**Drain wire:** stranded in tinned copper  
**II° Shield:** Braided covering 80% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black and numbered

#### POWER CABLE:

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

#### GROUPING:

Waste filler between elements  
**Total tape:** Unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	EEL OR SPOOL COND.NUMBER		
							mt.	Type	Kg.
C294	4 +1	1 X 2 X 0,22 (24 AWG)	7 X 0,20	1,5	4,5	19,4	100	B	27,5
		3 X 2,50 (13 AWG)	80 X 0,20	3,7	10,0				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
12					

FXMD29425 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXMD29425	BLACK	25 M	1

### CHARACTERISTICS

#### 4X DIGITAL AUDIO CABLE:

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colour:** Red, Blue  
**I° Shield:** Aluminium/Polyester tape covering 100%  
**Drain wire:** stranded in tinned copper  
**II° Shield:** Braided covering 80% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black and numbered

#### POWER CABLE:

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

#### GROUPING:

Waste filler between elements  
**Total tape:** Unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	EEL OR SPOOL COND.NUMBER		
							mt.	Type	Kg.
C294	4 +1	1 X 2 X 0,22 (24 AWG)	7 X 0,20	1,5	4,5	19,4	100	B	27,5
		3 X 2,50 (13 AWG)	80 X 0,20	3,7	10,0				


CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
12					

FXMD29475 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXMD29475	BLACK	75 M	1

# Digital AES/EBU Cables

**Combi Cables:** Cable Tasker C294

**Connectors:** Neutrik 4x NC3FXX Schuko plug – Neutrik 4x NC3MDL1 Schuko socket – Cable Drum Schill

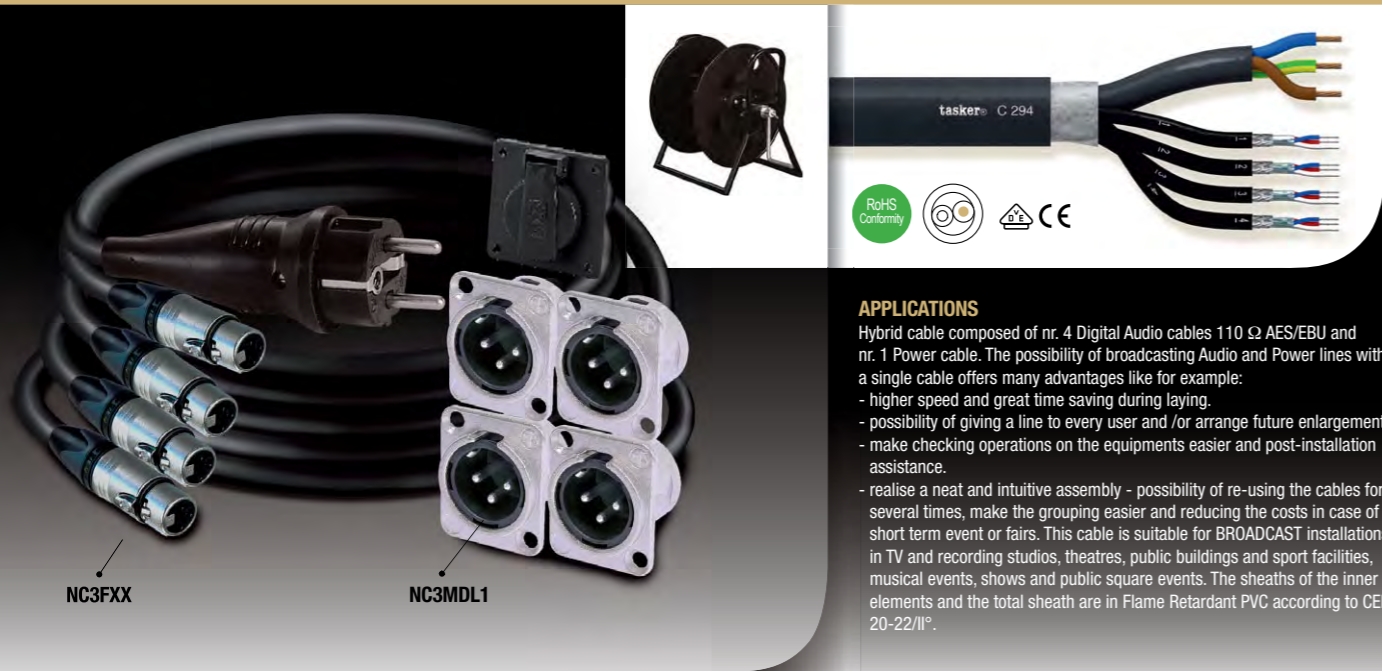

**APPLICATIONS**

Hybrid cable composed of nr. 4 Digital Audio cables 110 Ω AES/EBU and nr. 1 Power cable. The possibility of broadcasting Audio and Power lines with a single cable offers many advantages like for example:

- higher speed and great time saving during laying,
- possibility of giving a line to every user and /or arrange future enlargement.
- make checking operations on the equipments easier and post-installation assistance.
- realise a neat and intuitive assembly - possibility of re-using the cables for several times, make the grouping easier and reducing the costs in case of short term event or fairs. This cable is suitable for BROADCAST installations, in TV and recording studios, theatres, public buildings and sport facilities, musical events, shows and public square events. The sheaths of the inner elements and the total sheath are in Flame Retardant PVC according to CEI 20-22/II°.

**Combi Cables:** Cable Tasker C294 **Connectors:** Neutrik 4x NC3FXX – Schuko rubber plug –

Neutrik 4x NC3MXX – Schuko rubber socket – Cable Drum Schill



**APPLICATIONS**

Hybrid cable composed of nr. 4 Digital Audio cables 110 Ω AES/EBU and nr. 1 Power cable. The possibility of broadcasting Audio and Power lines with a single cable offers many advantages like for example:

- higher speed and great time saving during laying,
- possibility of giving a line to every user and /or arrange future enlargement.
- make checking operations on the equipments easier and post-installation assistance.
- realise a neat and intuitive assembly - possibility of re-using the cables for several times, make the grouping easier and reducing the costs in case of short term event or fairs. This cable is suitable for BROADCAST installations, in TV and recording studios, theatres, public buildings and sport facilities, musical events, shows and public square events. The sheaths of the inner elements and the total sheath are in Flame Retardant PVC according to CEI 20-22/II°.

**CHARACTERISTICS**

**4X DIGITAL AUDIO CABLE:**  
**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colour:** Red, Blue  
**I° Shield:** Aluminium/Polyester tape covering 100%  
**Drain wire:** stranded in tinned copper  
**II° Shield:** Braided covering 80% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black and numbered

**POWER CABLE:**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

**GROUPING:**  
 Waste filler between elements  
**Total tape:** Unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	EEL OR SPOOL COND.NUMBER		
							mt.	Type	Kg.
C294	4 +1	1 X 2 X 0,22 (24 AWG)	7 X 0,20	1,5	4,5	19,4	100	B	27,5
		3 X 2,50 (13 AWG)	80 X 0,20	3,7	10,0				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
12					

FXMD2941 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
FXMD2941	BLACK	100 M	1

**CHARACTERISTICS**

**4X DIGITAL AUDIO CABLE:**  
**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colour:** Red, Blue  
**I° Shield:** Aluminium/Polyester tape covering 100%  
**Drain wire:** stranded in tinned copper  
**II° Shield:** Braided covering 80% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black and numbered

**POWER CABLE:**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

**GROUPING:**  
 Waste filler between elements  
**Total tape:** Unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C294	4 +1	1 X 2 X 0,22 (24 AWG)	7 X 0,20	1,5	4,5	19,4	100	B	27,5
		3 X 2,50 (13 AWG)	80 X 0,20	3,7	10,0				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
12					

DIF4S294S1 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DIF4S294S1	BLACK	20 M	1
DIF4S294S2	BLACK	30 M	1
DIF4S294S3	BLACK	40 M	1

# Digital AES/EBU Cables

**Combi Cables:** Cable Tasker C294 **Connectors:** Neutrik 4x NC3FXX – Schuko rubber plug –

Neutrik 4x NC3MXX – Schuko rubber socket – Cable Drum Schill



**APPLICATIONS**

Hybrid cable composed of nr. 4 Digital Audio cables 110 Ω AES/EBU and nr. 1 Power cable. The possibility of broadcasting Audio and Power lines with a single cable offers many advantages like for example:

- higher speed and great time saving during laying,
- possibility of giving a line to every user and /or arrange future enlargement.
- make checking operations on the equipments easier and post-installation assistance.
- realise a neat and intuitive assembly - possibility of re-using the cables for several times, make the grouping easier and reducing the costs in case of short term event or fairs. This cable is suitable for BROADCAST installations, in TV and recording studios, theatres, public buildings and sport facilities, musical events, shows and public square events. The sheaths of the inner elements and the total sheath are in Flame Retardant PVC according to CEI 20-22/II°.

**Digital Audio AES/EBU Cables:** Cable Tasker C287

**Connectors:** Neutrik NC5MXX – NC5FXX



**APPLICATIONS**

Professional audio QUAD cable for Broadcast. Cable with two pairs for double balancing between the conductors and the total shield.

**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Pair colours:** Transparent-Red, Transparent-Blue Waste filler between conductors Total taping in unweaved polyester  
**Shield:** Braided covering 100% O.F.C. tinned copper  
**Sheath:** PVC  
**Sheath colours:** Black, Grey

**CHARACTERISTICS**

**4X DIGITAL AUDIO CABLE**

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colour:** Red, Blue  
**I° Shield:** Aluminium/Polyester tape covering 100%  
**Drain wire:** stranded in tinned copper  
**II° Shield:** Braided covering 80% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black and numbered

**POWER CABLE**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

**GROUPING**

Waste filler between elements  
**Total tape:** Unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C294	4	1 X 2 X 0,22 (24 AWG)	7 X 0,20	1,5	4,5	19,4	100	B	27,5
	+1	3 X 2,50 (13 AWG)	80 X 0,20	3,7	10,0				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
12					

DIF4S294S2 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DIF4S294S5	BLACK	50 M	1
DIF4S294S6	BLACK	60 M	1
DIF4S294S7	BLACK	75 M	1

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	mt.	Type	Kg.
C287	2 X 2	2X2 X 0,22 (24 AWG)	28 X 0,10	1,1	6,6	100	B	6,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	65	120	49	-15/+70

DMX5M5F287 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DMX5M5F287	BLACK	1.0 M	1
DMX5M5F287	BLACK	2.0 M	1
DMX5M5F287	BLACK	3.0 M	1
DMX5M5F287	BLACK	5.0 M	1
DMX5M5F287	BLACK	10.0 M	1
DMX5M5F287	BLACK	20.0 M	1
DMX5M5F287	BLACK	30.0 M	1
DMX5M5287	BLACK	50.0 M	1



# Digital AES/EBU Cables

## Digital Audio AES/EBU Cables: Cable Tasker C801

Connectors: Neutrik NC5MXX BAG – NC5FXX BAG



NC5MXX BAG

NC5FXX BAG



### APPLICATIONS

Extra flex digital audio cable 110 Ω AES/EBU with small diameter, suitable for inner equipment wiring and/or for miniaturized plugs.

### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper

**Cond. insulation:** PPE

**Core colours:** Red, Blue

Textile fillers between conductors

**Drain wire:** O.F.C. tinned copper

**Shield:** Spiral covering 100% O.F.C. red copper

**Sheath:** Flame Retardant PVC CEI 20-22/II°

**Sheath colour:** Black

## Digital Audio AES/EBU Cables: Cable Tasker C801

Connectors: Neutrik NC5MXX BAG – NC5FXX BAG



NC5MXX BAG

NC5FXX BAG



### APPLICATIONS

Extra flex digital audio cable 110 Ω AES/EBU with small diameter, suitable for inner equipment wiring and/or for miniaturized plugs.

### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper

**Cond. insulation:** PPE

**Core colours:** Red, Blue

Textile fillers between conductors

**Drain wire:** O.F.C. tinned copper

**Shield:** Spiral covering 100% O.F.C. red copper

**Sheath:** Flame Retardant PVC CEI 20-22/II°

**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
C801	2	2 X 24 (0,22)	28 X 0,10	1,5	4,4	100	B	3,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/CORE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMP.
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
C801	2	2 X 24 (0,22)	28 X 0,10	1,5	4,4	100	B	3,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/CORE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMP.
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70

DF5MSB801 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DF5MSB801	BLACK	0.5 M	1
DF5MSB802	BLACK	1.0 M	1
DF5MSB803	BLACK	2.0 M	1
DF5MX5804	BLACK	3.0 M	1



DF5MXB801 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DF5MXB803	BLACK	0.30 M	1



# Digital AES/EBU Cables

Digital Audio AES/EBU Cables: Cable Tasker TSK1038

Connectors: Neutrik NC5MXX BAG – NC5FXX BAG



**APPLICATIONS**  
Professional digital audio cables 110 Ω AES/EBU for DMX and audio installations on long distances in big spaces as for example airports, megastores, public buildings.

**CHARACTERISTICS**  
**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
 Waste filler between conductors  
 Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Braided covering 85% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Blue-night

Digital Audio AES/EBU Cables: Cable Tasker TSK1039

Connectors: Neutrik NC5MXX BAG – NC5FXX BAG



**APPLICATIONS**  
Professional digital audio cables 110 Ω AES/EBU for DMX and audio installations on long distances in big spaces as for example airports, megastores, public buildings.

**CHARACTERISTICS**  
**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
 Waste filler between conductors  
 Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Braided covering 85% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Blue-night

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
TSK 1038	2	2 X 0,35 (22 AWG)	11 X 0,20	1,6	6,3	100	B	5,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/CORE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMP.
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
60	45	90	110	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
TSK 1039	2	2 X 0,50 (20 AWG)	16 X 0,20	2,0	6,6	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/CORE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMP.
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
45	45	90	110	49	-15/+70

D5M5F1038 BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
D5M5F10381	BLUE-N	1 M	1
D5M5F10382	BLUE-N	2 M	1
D5M5F10383	BLUE-N	3 M	1
D5M5F10386	BLUE-N	6 M	1
D5M5F103812	BLUE-N	12 M	1
D5M5F103824	BLUE-N	24 M	1
D5M5F103836	BLUE-N	36 M	1



D5M5F1039 BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
D5M5F10391	BLUE-N	1 M	1
D5M5F10392	BLUE-N	2 M	1
D5M5F10393	BLUE-N	3 M	1
D5M5F10396	BLUE-N	6 M	1
D5M5F103912	BLUE-N	12 M	1
D5M5F103924	BLUE-N	24 M	1
D5M5F103936	BLUE-N	36 M	1
D5M5F103948	BLUE-N	48 M	1



# Digital AES/EBU Cables

## Digital Audio AES/EBU Cables: Cable Tasker TSK1040

Connectors: Neutrik NC5MXX BAG – NC5FXX BAG




**APPLICATIONS**  
Professional digital audio cables 110 Ω AES/EBU for DMX and audio installations on long distances in big spaces as for example airports, megastores, public buildings.

**CHARACTERISTICS**  
**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
 Waste filler between conductors  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Braided covering 85% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Blue-night

## Digital Audio AES/EBU Cables: Cable Tasker C287

Connectors: Neutrik NC5MXX – NC5FXX – Cable drum Schill

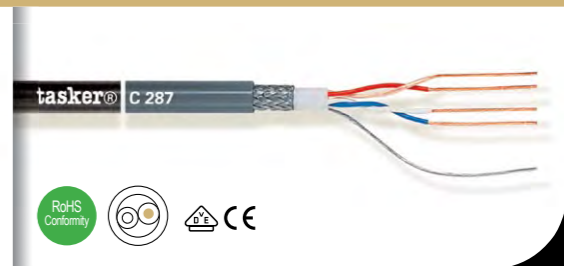

**APPLICATIONS**  
Professional audio QUAD cable for Broadcast. Cable with two pairs for double balancing between the conductors and the total shield.

**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Compact XLPE  
**Pair colours:** Transparent-Red, Transparent-Blue Waste filler between conductors Total taping in unweaved polyester  
**Shield:** Braided covering 100% O.F.C. tinned copper  
**Sheath:** PVC  
**Sheath colours:** Black, Grey

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
TSK 1040	2	2 X 0,75 (18 AWG)	24 X 0,20	2,3	7,4	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMP.
Ω/Km ± 5%	pF/mt	pF/mt	Ω	AC-V	°C
32	45	90	110	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						ml.	Type	Kg.
C287	2 X 2	2X2 X 0,22 (24 AWG)	28 X 0,10	1,1	6,6	100	B	6,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	AC-V	°C
90	65	120	49	-15/+70

D5M5F1040 BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
D5M5F10401	BLUE-N	1 M	1
D5M5F10402	BLUE-N	2 M	1
D5M5F10403	BLUE-N	3 M	1
D5M5F10406	BLUE-N	6 M	1
D5M5F104012	BLUE-N	12 M	1
D5M5F104024	BLUE-N	24 M	1
D5M5F104036	BLUE-N	36 M	1
D5M5F104048	BLUE-N	48 M	1



DMX5M5F287 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DMX5M5F287	BLACK	30.0 M	1
DMX5M5287	BLACK	50.0 M	1



# Digital AES/EBU Cables

## Digital Audio AES/EBU Cables: Cable Tasker TSK1038

Connectors: Neutrik NC5MXX BAG – NC5FXX BAG Cable Drum Schill



**NC5MXX BAG** **NC5FXX BAG**

**APPLICTIONS**  
Professional digital audio cables 110 Ω AES/EBU for DMX and audio installations on long distances in big spaces as for example airports, megastores, public buildings.

**CHARACTERISTICS**  
**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
 Waste filler between conductors  
 Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Braided covering 85% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Blue-night

## Digital Audio AES/EBU Cables: Cable Tasker TSK1039

Connectors: Neutrik NC5MXX BAG – NC5FXX BAG Cable Drum Schill



**NC5MXX BAG** **NC5FXX BAG**

**APPLICTIONS**  
Professional digital audio cables 110 Ω AES/EBU for DMX and audio installations on long distances in big spaces as for example airports, megastores, public buildings.

**CHARACTERISTICS**  
**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
 Waste filler between conductors  
 Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Braided covering 85% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Blue-night

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	ml.	Type	Kg.
TSK 1038	2	2 X 0,35 (22 AWG)	11 X 0,20	1,6	6,3	100	B	5,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/CORE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMP.
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
60	45	90	110	49	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	mm.	ml.	Type	Kg.
TSK 1039	2	2 X 0,50 (20 AWG)	16 X 0,20	2,0	6,6	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/CORE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMP.
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
45	45	90	110	49	-15/+70

D5M5F1038 BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
D5M5F10385	BLUE-N	50 M	1
D5M5F10381	BLUE-N	100 M	1



D5M5F1039 BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
D5M5F10395	BLUE-N	50 M	1
D5M5F10391	BLUE-N	100 M	1
D5M5F103915	BLUE-N	150 M	1



# Digital AES/EBU Cables

## Digital Audio AES/EBU Cables: Cable Tasker TSK1040

Connectors: Neutrik NC5MXX BAG – NC5FXX BAG – Cable Drum Schill




**NC5MXX BAG** **NC5FXX BAG**

**APPLICATIONS**  
Professional digital audio cables 110 Ω AES/EBU for DMX and audio installations on long distances in big spaces as for example airports, megastores, public buildings.

**CHARACTERISTICS**  
**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
Waste filler between conductors  
Total taping in unweaved polyester  
**Drain wire:** O.F.C. tinned copper  
**Shield:** Braided covering 85% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Blue-night

## Combi Cables: Cable Tasker C294

Connectors: Neutrik 4x NC5FXX – Schuko rubber plug – Neutrik4x NC5MXX – Schuko rubber socket

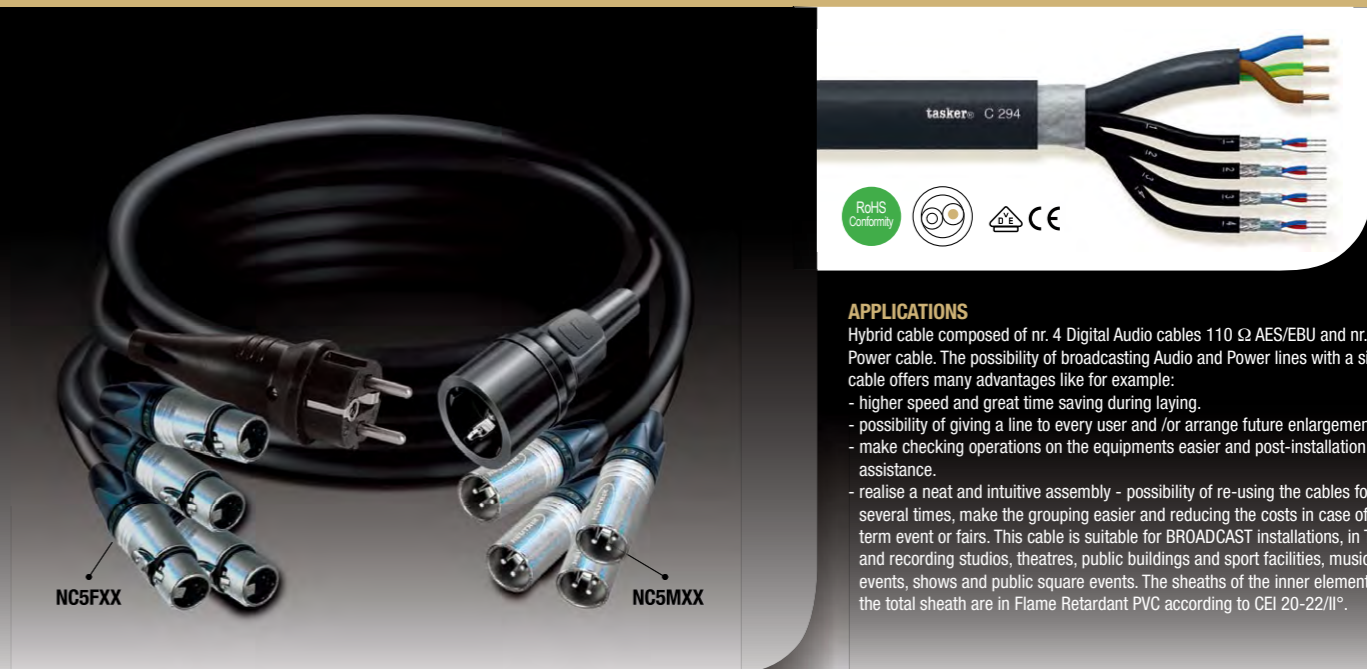

**NC5FXX** **NC5MXX**

**APPLICATIONS**  
Hybrid cable composed of nr. 4 Digital Audio cables 110 Ω AES/EBU and nr. 1 Power cable. The possibility of broadcasting Audio and Power lines with a single cable offers many advantages like for example:  
- higher speed and great time saving during laying.  
- possibility of giving a line to every user and /or arrange future enlargement.  
- make checking operations on the equipments easier and post-installation assistance.  
- realise a neat and intuitive assembly - possibility of re-using the cables for several times, make the grouping easier and reducing the costs in case of short term event or fairs. This cable is suitable for BROADCAST installations, in TV and recording studios, theatres, public buildings and sport facilities, musical events, shows and public square events. The sheaths of the inner elements and the total sheath are in Flame Retardant PVC according to CEI 20-22/II°.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
TSK 1040	2	2 X 0,75 (18 AWG)	24 X 0,20	2,3	7,4	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMP.
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
32	45	90	110	49	-15/+70

D5M5F1040 BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
D5M5F10405	BLUE-N	50 M	1
D5M5F10401	BLUE-N	100 M	1
D5M5F104015	BLUE-N	150 M	1
D5M5F104020	BLUE-N	200 M	1



### CHARACTERISTICS

#### 4X DIGITAL AUDIO CABLE

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colour:** Red, Blue  
**I° Shield:** Aluminium/Polyester tape covering 100%  
**Drain wire:** stranded in tinned copper  
**II° Shield:** Braided covering 80% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black and numbered

#### POWER CABLE

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

#### GROUPING

Waste filler between elements  
**Total tape:** Unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C294	4 X 2	1 X 2 X 0,22 (24 AWG) 3 X 2,50 (13 AWG)	7 X 0,20 80 X 0,20	1,5 3,7	4,5 10,0	19,4	100	B	27,5

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70


DIF5M5S294S BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DIF5M1S294S	BLACK	10 M	1
DIF5M2S294S	BLACK	20 M	1
DIF5M3S294S	BLACK	30 M	1
DIF5M4S294S	BLACK	40 M	1
DIF5M5S294S	BLACK	50 M	1
DIF5M6S294S	BLACK	60 M	1
DIF5M7S294S	BLACK	75 M	1



# Digital AES/EBU Cables

**Combi Cables: Cable Tasker C284**

**Connectors: Neutrik 2x NC5FXX – Schuko rubber plug – Neutrik 2x NC5MXX – Schuko socket – Cable Drum Schill**

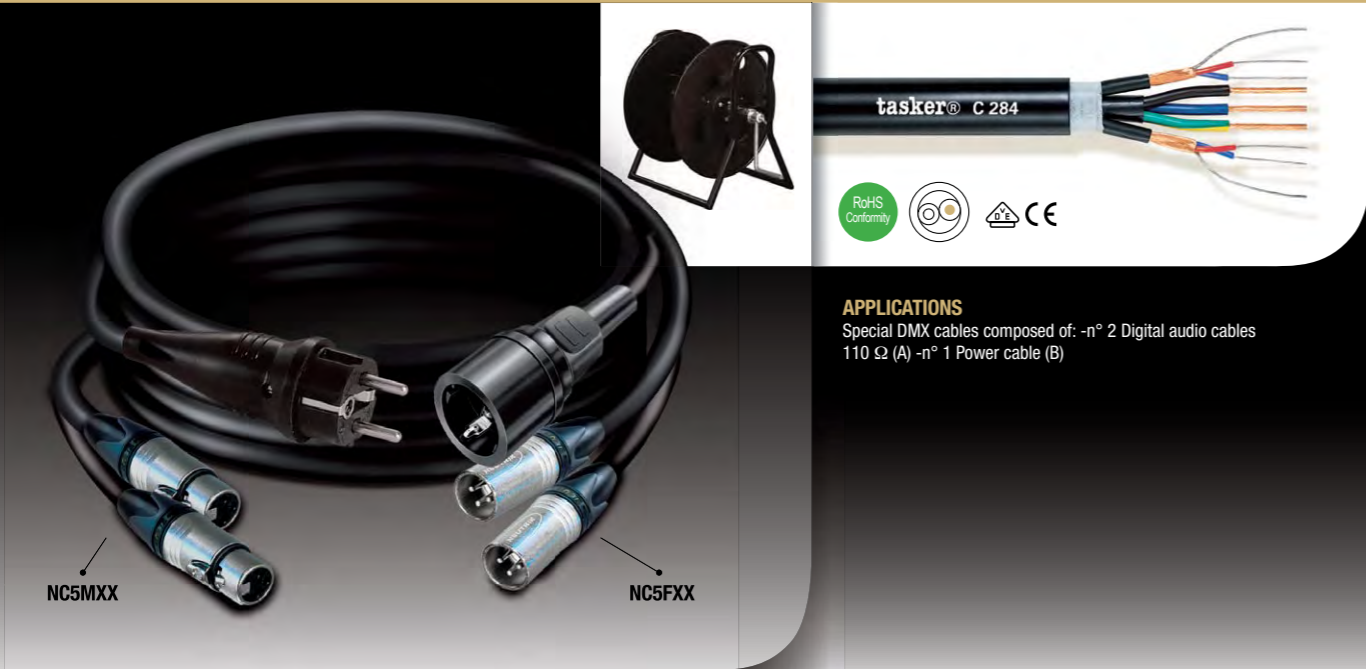

**APPLICATIONS**  
Special DMX cables composed of: -n° 2 Digital audio cables 110 Ω (A) -n° 1 Power cable (B)

**Combi Cables: Cable Tasker C294 Connectors: Neutrik 4x NC5FXX – Schuko plug –**

**Neutrik 4x NC5MXX – Schuko rubber socket – Cable Drum Schill**



**APPLICATIONS**  
Hybrid cable composed of nr. 4 Digital Audio cables 110 Ω AES/EBU and nr. 1 Power cable. The possibility of broadcasting Audio and Power lines with a single cable offers many advantages like for example:  
- higher speed and great time saving during laying.  
- possibility of giving a line to every user and /or arrange future enlargement.  
- make checking operations on the equipments easier and post-installation assistance.  
- realise a neat and intuitive assembly - possibility of re-using the cables for several times, make the grouping easier and reducing the costs in case of short term event or fairs. This cable is suitable for BROADCAST installations, in TV and recording studios, theatres, public buildings and sport facilities, musical events, shows and public square events. The sheaths of the inner elements and the total sheath are in Flame Retardant PVC according to CEI 20-22/II°.

**CHARACTERISTICS**

**A) Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PPE  
**Core colours:** Red, Blue  
Textile fillers between conductors  
**Drain wire:** O.F.C. tinned copper  
Total taping in unweaved polyester

**Shields:** Spiral covering 100% O.F.C. red copper  
**Inner Sheath:** Flame Retardant PVC

**B) Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green

**Inner Sheaths:** Flame Retardant PVC  
Waste filler and PVC among elements  
Total taping in unweaved polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

**CHARACTERISTICS**

**4X DIGITAL AUDIO CABLE**

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colour:** Red, Blue  
**I° Shield:** Aluminium/Polyester tape covering 100%  
**Drain wire:** stranded in tinned copper  
**II° Shield:** Braided covering 80% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black and numbered

**POWER CABLE**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

**GROUPING**

Waste filler between elements  
**Total tape:** Unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C284	2 X 2	2 X 2 X 0,22 (24 AWG)	28 X 0,10	1,5	4,0	13,8	100	B	28
	+3	3 X 1,50 (16 AWG)	48 X 0,20	3,0	7,2				

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C294	4 X 2	1 X 2 X 0,22 (24 AWG)	7 X 0,20	1,5	4,5	19,4	100	B	27,5
		3 X 2,50 (13 AWG)	80 X 0,20	3,7	10,0				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
16					

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
12					

DIF2M2S284S BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DIF2M21284S	BLACK	10 M	1
DIF2M22284S	BLACK	20 M	1
DIF2M23284S	BLACK	30 M	1
DIF2M24284S	BLACK	40 M	1
DIF2M25284S	BLACK	50 M	1
DIF2M26284S	BLACK	60 M	1
DIF2M27284S	BLACK	75 M	1

DIF3M3S294S BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DIF5M5S2942	BLACK	20 M	1
DIF5M5S2943	BLACK	30 M	1
DIF5M5S2944	BLACK	40 M	1

# Digital AES/EBU Cables

**Combi Cables:** Cable Tasker C294 **Connectors:** Neutrik 4x NC5FXX – Schuko rubber plug –

Neutrik 4x NC5MXX – Schuko rubber socket – Cable Drum Schill



### APPLICATIONS

Hybrid cable composed of nr. 4 Digital Audio cables 110 Ω AES/EBU and nr. 1 Power cable. The possibility of broadcasting Audio and Power lines with a single cable offers many advantages like for example:

- higher speed and great time saving during laying,
- possibility of giving a line to every user and /or arrange future enlargement.
- make checking operations on the equipments easier and post-installation assistance.
- realise a neat and intuitive assembly - possibility of re-using the cables for several times, make the grouping easier and reducing the costs in case of short term event or fairs. This cable is suitable for BROADCAST installations, in TV and recording studios, theatres, public buildings and sport facilities, musical events, shows and public square events. The sheaths of the inner elements and the total sheath are in Flame Retardant PVC according to CEI 20-22/II°.

### CHARACTERISTICS

#### 4X DIGITAL AUDIO CABLE

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colour:** Red, Blue  
**I° Shield:** Aluminium/Polyester tape covering 100%  
**Drain wire:** stranded in tinned copper  
**II° Shield:** Braided covering 80% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black and numbered

#### POWER CABLE

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Flame Retardant PVC  
**Core colours:** Brown, Blue, Yellow/green  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

#### GROUPING

**Waste filler** between elements  
**Total tape:** Unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTER-NAL INNER SHEATH	EXTER-NAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>		mm.	mm.		mm.	mt.	Type
C294	4 X 2	1 X 2 X 0,22 (24 AWG)	7 X 0,20	1,5	4,5	19,4	100	B	27,5
		3 X 2,50 (13 AWG)	80 X 0,20	3,7	10,0				

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHEILD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	Ω	AC-V	°C
90	50	95	110	49	-15/+70
12					

DIF5S294S1 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DIF55294S1	BLACK	50 M	1
DIF56294S1	BLACK	60 M	1
DIF57294S1	BLACK	75 M	1




# tasker®



Digital AES/EBU Cables: DMX 5p XLR Power and Drums

# Note

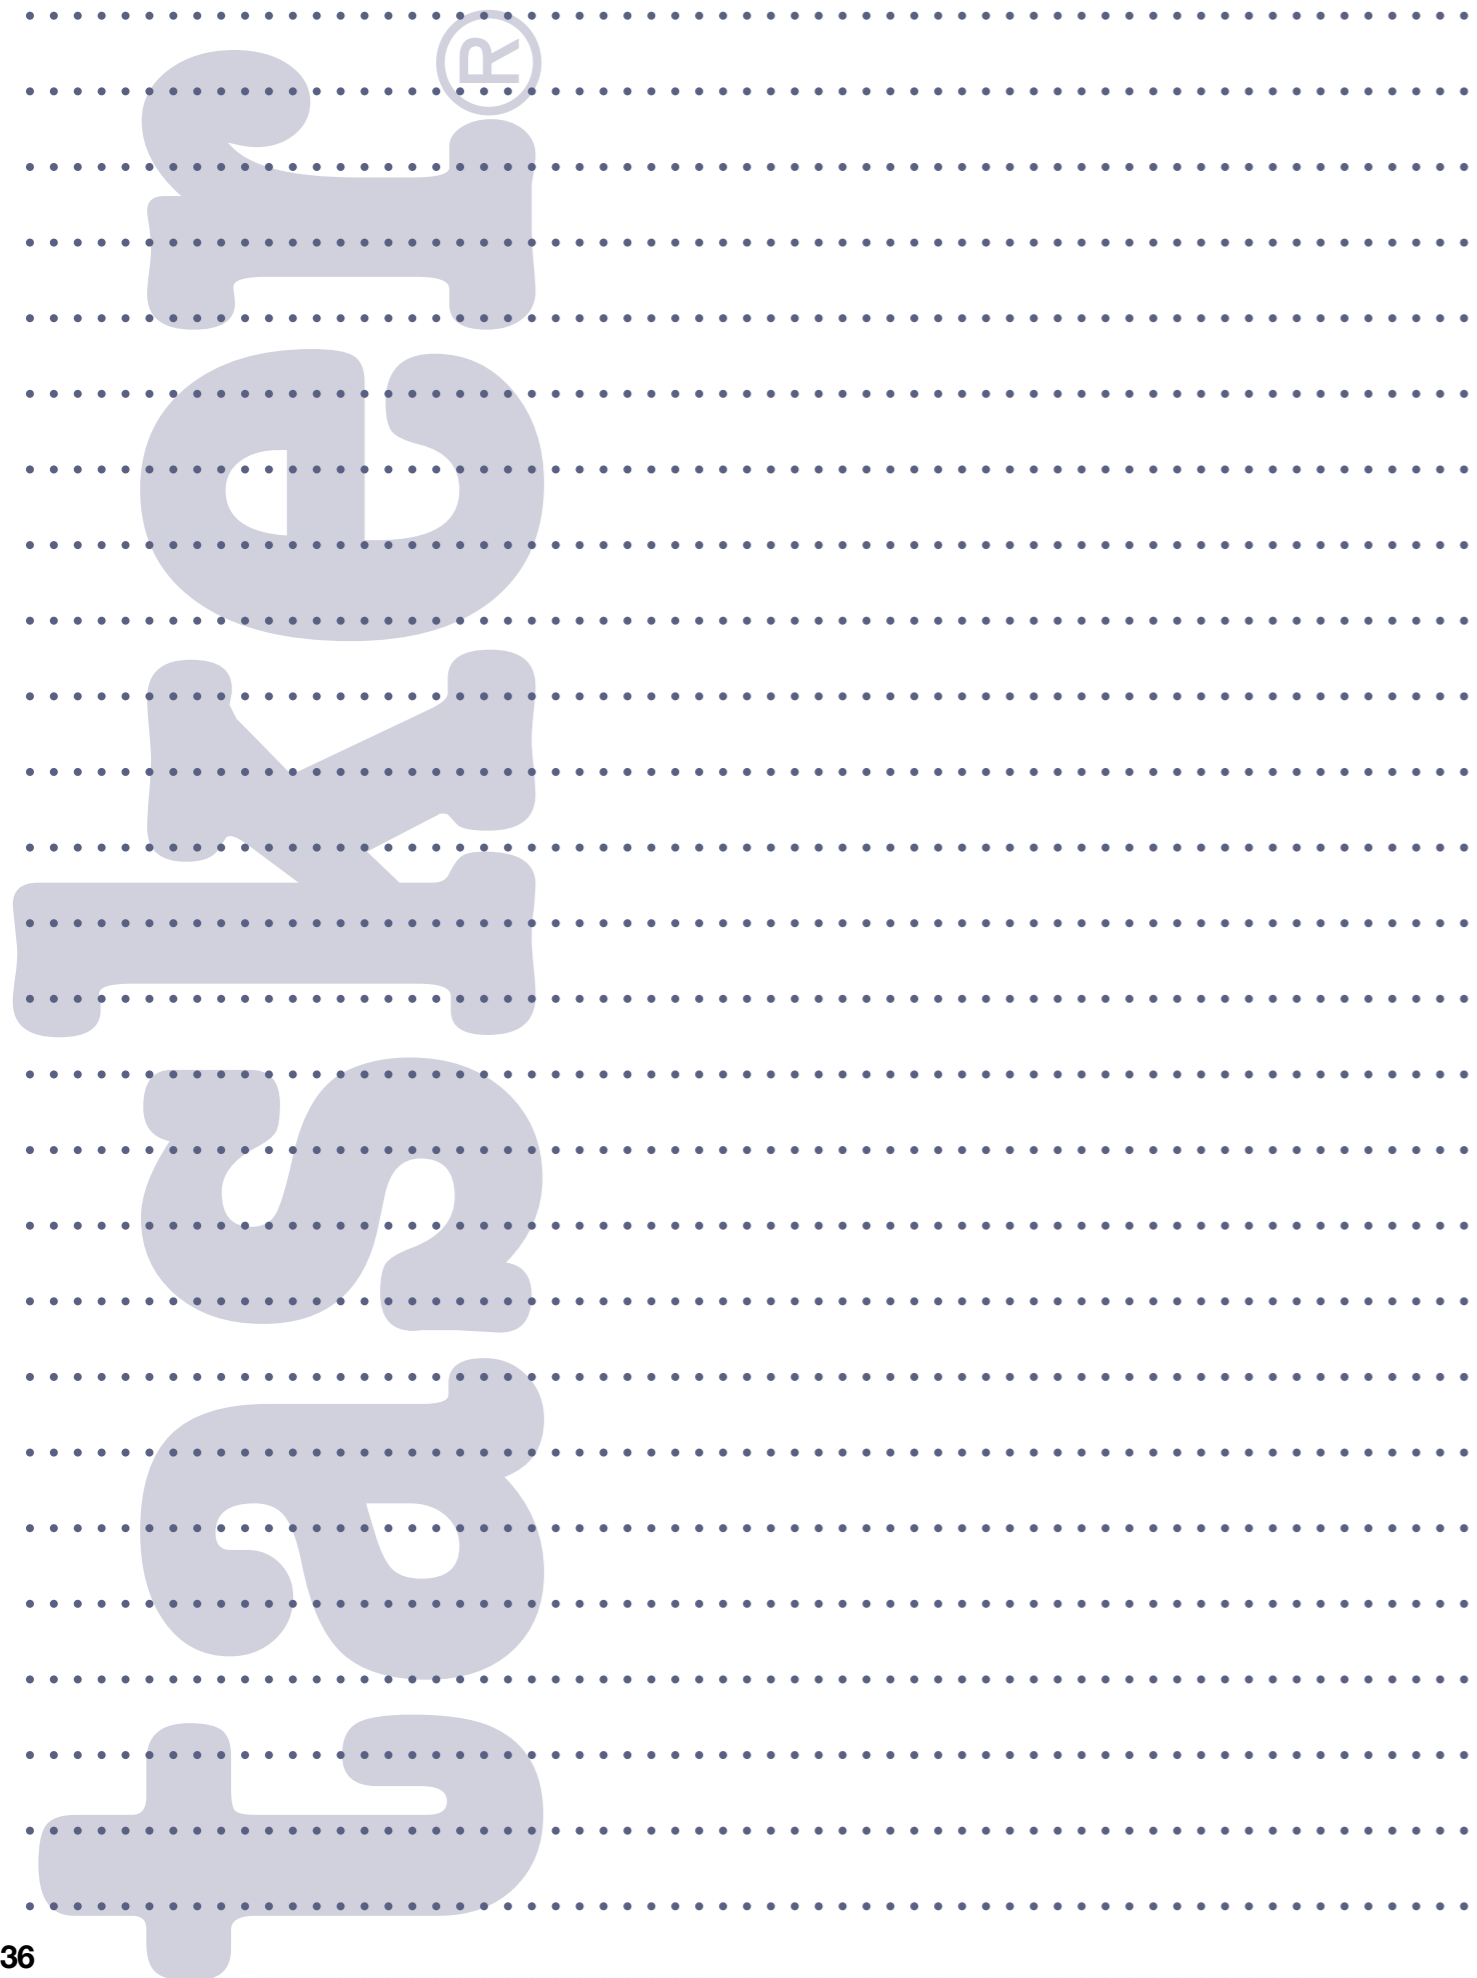

# Video Cables

Special video cables 75 Ω: Cable Tasker TSK 1086

Connectors: Neutrik 3x BNC – 3x BNC



### APPLICATIONS

Special divisible multi-video flat cable composed of 3 mini-coaxial video cables for fixed and mobile installation and video assembly, or other R.G.B. video applications.

### CHARACTERISTICS

- Conductors:** stranded in O.F.C. red copper
- Insulations:** PE
- Shields:** Braided covering 90% O.F.C. silver plated copper
- Inner sheaths:** PVC
- Sheath colours:** Red, Green, Blue
- Sheath:** Flame Retardant PVC CEI 20-22/II°
- Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C294	3	mm <sup>2</sup>	mm.	Ø mm.	Ø mm.	mm.	100	B	27,5
		3 X 75 Ω (0,08 MM <sup>2</sup> )	7 X 0,20 80 X 0,20	1,5 3,7	4,5 10,0	19,4			

ATTENUATION DB/100MT					
50 MHZ	100 MHZ	200 MHZ	400 MHZ	800 MHZ	1000 MHZ
19,2	27,9	40,7	59,2	85,3	101,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE PROPAGATION
Ω/Km ± 5%	PF/mt	PF/mt	%	AC-V	V	°C
210		67	66	75	49	-15/+70

VNBT751086 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
VNBT7510863	BLACK	3 M	1
VNBT7510866	BLACK	6 M	1
VNBT7510869	BLACK	9 M	1
VNBT75108612	BLACK	12 M	1
VNBT75108618	BLACK	18 M	1
VNBT75108624	BLACK	24 M	1



# Video Cables

## Special video cables 75 Ω: Cable Tasker C263

Connectors: Neutrik 5x BNC – 5x BNC



### APPLICATIONS

Flexible cable composed of: 5 mini-coaxial cables for video R.G.B. +H.V. transmission on professional video systems and for Monitors and video-projectors. Cable for fixed and mobile installation, suitable for the realization of video assembly.

### CHARACTERISTICS

**Conductors:** stranded in O.F.C. red copper  
**Insulations:** PEE  
**Shields:** spiral covering 100% O.F.C. tinned copper  
**Sheaths:** PVC  
**Sheath colours:** Red, Green, Blue, Black, White  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Grey

## Special video cables 75 Ω: Cable Tasker C145

Connectors: Neutrik 5x BNC – 5x BNC



### APPLICATIONS

Professional cable composed of: 5 mini-coaxial cables for video R.G.B. +H.V. transmission on professional video systems and for Monitors and video-projectors. Cable for fixed and mobile installation, suitable for the realization of video assembly.

### CHARACTERISTICS

**Conductors:** stranded in O.F.C. tinned copper  
**Insulations:** PPE  
**Shields:** Braided covering 90% O.F.C. tinned copper  
**Sheaths:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colours:** Red, Green, Blue, Black, White  
**Total taping:** unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C263	5	5 X 75 Ω (0,08 MM²)	10 X 0,10	1,6	2,8	9,8	100	B	12,0
							300	B	
							500	B	

ATTENUATION DB/100MT						
50	100	200	400	800	1000	
MHZ	MHZ	MHZ	MHZ	MHZ	MHZ	
19,5	28,5	41,7	60,2	87,3	103,0	

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C145	5	5 X 75 Ω (0,08 MM²)	7 X 0,12	1,4	2,4	9,2	100	B	11,5
							300	B	
							500	B	

ATTENUATION DB/100MT						
50	100	200	400	800	1000	
MHZ	MHZ	MHZ	MHZ	MHZ	MHZ	
19,7	28,7	42,0	61,2	88,5	105,0	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE PROPAGATION
Ω/Km ± 5%	PF/mt	PF/mt	%	AC-V	V	°C
210		67	66	75	49	-15/+70

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE PROPAGATION
Ω/Km ± 5%	PF/mt	PF/mt	%	AC-V	V	°C
210		67	66	75	49	-15/+70

VNBT75263 GREY			
PART NR.	COLOR	LENGTH	PACK. UNIT
VNBT752633	GREY	3 M	1
VNBT752636	GREY	6 M	1
VNBT752639	GREY	9 M	1
VNBT7526312	GREY	12 M	1
VNBT7526318	GREY	18 M	1
VNBT7526324	GREY	24 M	1



VNBT75145 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
VNBT751453	BLACK	3 M	1
VNBT751456	BLACK	6 M	1
VNBT7514512	BLACK	12 M	1
VNBT7514524	BLACK	24 M	1
VNBT7514536	BLACK	36 M	1
VNBT7514548	BLACK	48 M	1



# Video Cables

## Special video cables 75 Ω: Cable Tasker TSK1066

Connectors: Neutrik 5x BNC – 5x BNC



### APPLICATIONS

Multicoaxial cable for video Analogueic and digital signals. Broadcast cable for video mixers or other equipment to be realized in TV studios and/or production studios. The coaxials are all double shielded and have a particular dielectric, which confers a low capacity and attenuation of the video signal on 100mt. Cable advised also for high definition transmission of composed video signals 75 Ω + R.G.B. or digital Audio, for video-projection equipment, monitors, big screens etc.

## Special video cables 75 Ω: Cable Tasker TSK1067

Connectors: Neutrik 7x BNC – 7x BNC



### APPLICATIONS

Multicoaxial cable for Analogueic and digital video signals. Broadcast cable for video mixers or other equipment to be realized in TV studios and/or production studios. The coaxials are all double shielded and have a particular dielectric, which confers a low capacity and attenuation of the video signal on 100mt. Cable advised also for High definition transmission of Composed video signals 75 Ω + R.G.B. or digital Audio for video-projection equipment, monitors, big screens etc.

### CHARACTERISTICS

**Conductors:** stiff wire in O.F.C. red copper  
**Insulations:** Special FOAM PE  
**I° Shields:** Aluminium tape covering 100%  
**II° Shields:** Braided covering 90% O.F.C. tinned copper  
**Sheaths:** PVC

**Sheath colours:** Red, Green, Blue, Black, White  
 Waste filler among elements  
**Total taping:** unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Blue-night

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK1066	5	5 X 75 Ω (0,29 MM²)	1 X 0,61	2,8	4,5	14,7	100	B	28,0

ATTENUATION DB/100MT						
30 MHZ	100 MHZ	200 MHZ	300 MHZ	500 MHZ	1000 MHZ	
6,2	11,3	15,0	18,2	24,0	36,0	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE PROPAGATION
Ω/Km ± 5%	PF/mt	PF/mt	%	AC-V	V	°C
61		56	78	75	49	-15/+70

VNBT75263 BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
VNBT752633	BLUE NIGHT	3 M	1
VNBT752636	BLUE NIGHT	6 M	1
VNBT752639	BLUE NIGHT	9 M	1
VNBT7526312	BLUE NIGHT	12 M	1
VNBT7526318	BLUE NIGHT	18 M	1
VNBT7526324	BLUE NIGHT	24 M	1



### CHARACTERISTICS

**Conductors:** stiff wire in O.F.C. red copper  
**Insulations:** Special FOAM PE  
**I° Shields:** Aluminium tape covering 100%  
**II° Shields:** Braided covering 90% O.F.C. tinned copper  
**Sheaths:** PVC

**Sheath colours:** Red, Green, Blue, Black, White  
 Waste filler among elements  
**Total taping:** unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Blue-night

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK1067	7	7 X 75 Ω (0,29 MM²)	1 X 0,61	2,8	4,5	14,7	100	B	35,5

ATTENUATION DB/100MT						
30 MHZ	100 MHZ	200 MHZ	300 MHZ	500 MHZ	1000 MHZ	
6,2	11,3	15,0	18,2	24,0	36,0	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE PROPAGATION
Ω/Km ± 5%	PF/mt	PF/mt	%	AC-V	V	°C
61		56	78	75	49	-15/+70


VNBT7567 BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
VNBT756710	BLUE NIGHT	10 M	1
VNBT756720	BLUE NIGHT	20 M	1
VNBT756730	BLUE NIGHT	30 M	1
VNBT756740	BLUE NIGHT	40 M	1
VNBT756750	BLUE NIGHT	50 M	1
VNBT756760	BLUE NIGHT	60 M	1
VNBT756775	BLUE NIGHT	75 M	1
VNBT7567100	BLUE NIGHT	100 M	1



# Video Cables

## Special video cables 75 Ω: Cable Tasker TSK1067

Connectors: Neutrik 7x BNC – 7x BNC – Cable Drum Schill

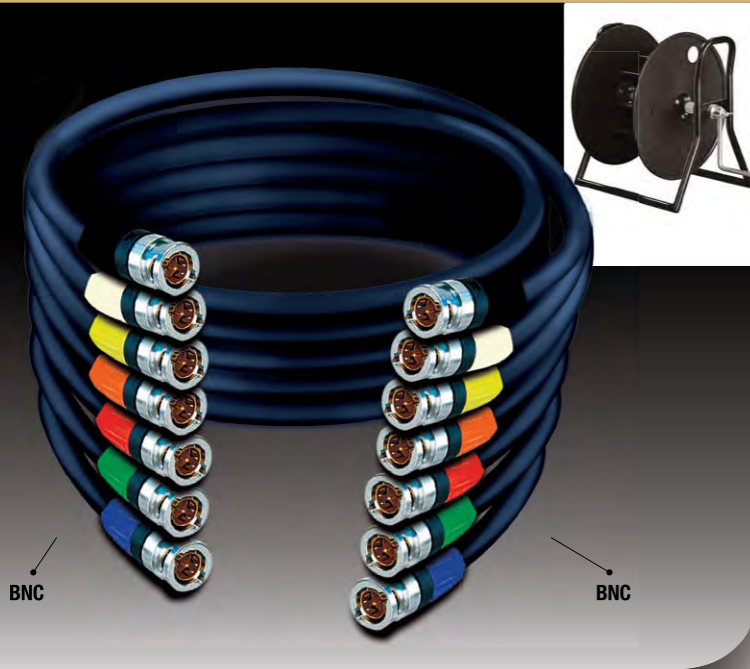


### APPLICATIONS

Multicoaxial cable for Analogueic and digital video signals. Broadcast cable for video mixers or other equipment to be realized in TV studios and/or production studios. The coaxials are all double shielded and have a particular dielectric, which confers a low capacity and attenuation of the video signal on 100mt. Cable advised also for High definition transmission of Composed video signals 75 Ω + R.G.B. or digital Audio for video-projection equipment, monitors, big screens etc.

## Special video cables 75 Ω: Cable Tasker TSK1066

Connectors: Neutrik 5x BNC – 5x BNC – Cable Drum Schill

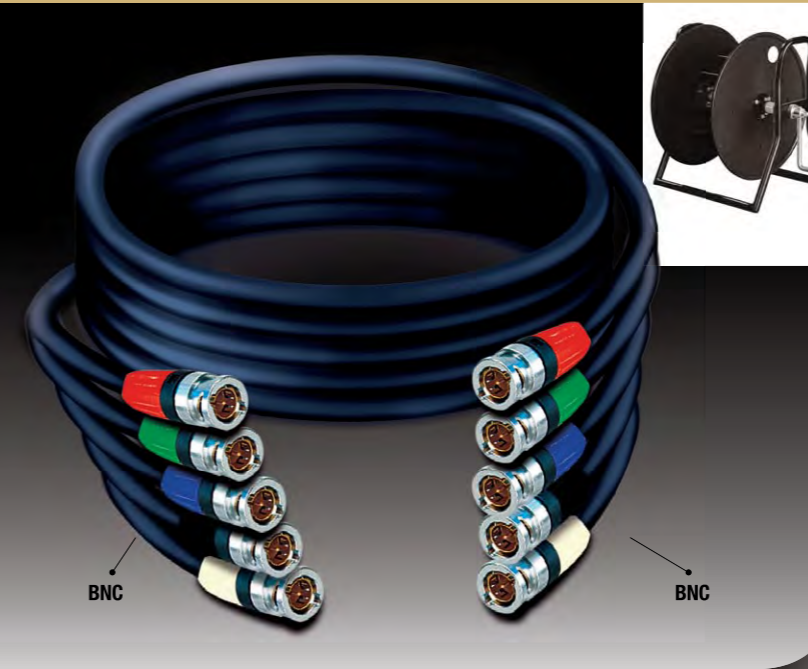

### APPLICATIONS

Multicoaxial cable for video Analogueic and digital signals. Broadcast cable for video mixers or other equipment to be realized in TV studios and/or production studios. The coaxials are all double shielded and have a particular dielectric, which confers a low capacity and attenuation of the video signal on 100mt. Cable advised also for high definition transmission of composed video signals 75 Ω + R.G.B. or digital Audio, for video-projection equipment, monitors, big screens etc.

### CHARACTERISTICS

**Conductors:** stiff wire in O.F.C. red copper  
**Insulations:** Special FOAM PE  
**I° Shields:** Aluminium tape covering 100%  
**II° Shields:** Braided covering 90% O.F.C. tinned copper  
**Sheaths:** PVC

**Sheath colours:** Red, Green, Blue, Black, White  
 Waste filler among elements  
**Total taping:** unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Blue-night

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		mm <sup>2</sup>	mm.	Ø mm.	Ø mm.	mm.			
TSK1067	7	7 X 75 Ω (0,29 MM <sup>2</sup> )	1 X 0,61	2,8	4,5	14,7	100	B	35,5

ATTENUATION DB/100MT						
30 MHZ	100 MHZ	200 MHZ	300 MHZ	500 MHZ	1000 MHZ	
6,2	11,3	15,0	18,2	24,0	36,0	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE PROPAGATION
Ω/Km ± 5%	PF/mt	PF/mt	%	AC-V	V	°C
61		56	78	75	49	-15/+70

VNBT7567 BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
VNBT756750	BLUE NIGHT	50 M	1
VNBT7567100	BLUE NIGHT	100 M	1

### CHARACTERISTICS

**Conductors:** stiff wire in O.F.C. red copper  
**Insulations:** Special FOAM PE  
**I° Shields:** Aluminium tape covering 100%  
**II° Shields:** Braided covering 90% O.F.C. tinned copper  
**Sheaths:** PVC

**Sheath colours:** Red, Green, Blue, Black, White  
 Waste filler among elements  
**Total taping:** unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Blue-night

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		mm <sup>2</sup>	mm.	Ø mm.	Ø mm.	mm.			
TSK1066	5	5 X 75 Ω (0,29 MM <sup>2</sup> )	1 X 0,61	2,8	4,5	14,7	100	B	28,0

ATTENUATION DB/100MT						
30 MHZ	100 MHZ	200 MHZ	300 MHZ	500 MHZ	1000 MHZ	
6,2	11,3	15,0	18,2	24,0	36,0	


CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE PROPAGATION
Ω/Km ± 5%	PF/mt	PF/mt	%	AC-V	V	°C
61		56	78	75	49	-15/+70

VNBT7566 BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
VNBT756650	BLUE NIGHT	50 M	1
VNBT7566100	BLUE NIGHT	100 M	1

# Video Cables

## VGA Cables: Cable Tasker C263

Connectors: D-Sub HD 15 PM – D-Sub HD 15 PM

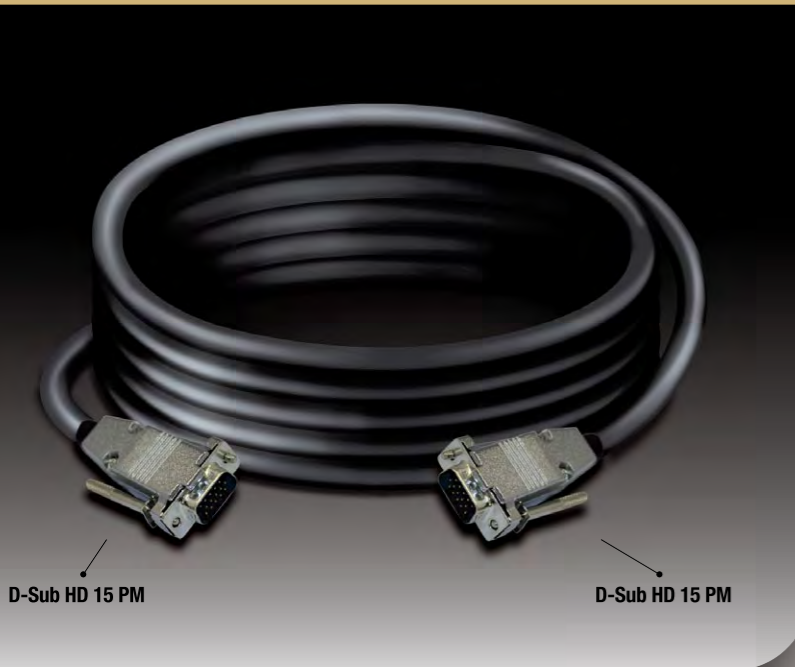

### APPLICATIONS



Flexible cable composed of: 5 mini-coaxial cables for video R.G.B. +H.V. transmission on professional video systems and for Monitors and video-projectors. Cable for fixed and mobile installation, suitable for the realization of video assembly.

### CHARACTERISTICS

**Conductors:** stranded in O.F.C. red copper  
**Insulations:** PEE  
**Shields:** spiral covering 100% O.F.C. tinned copper  
**Sheaths:** PVC  
**Sheath colours:** Red, Green, Blue, Black, White  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II\*  
**Sheath colour:** Grey

## VGA Cables: Cable Tasker C263

Connectors: Neutrik BNC – D-Sub HD 15 PM

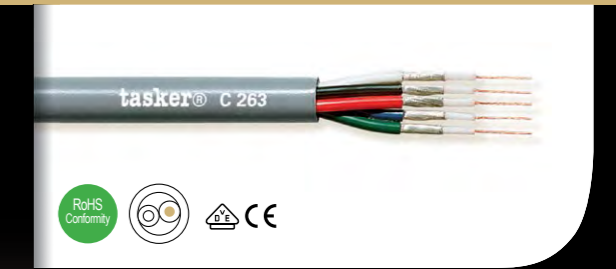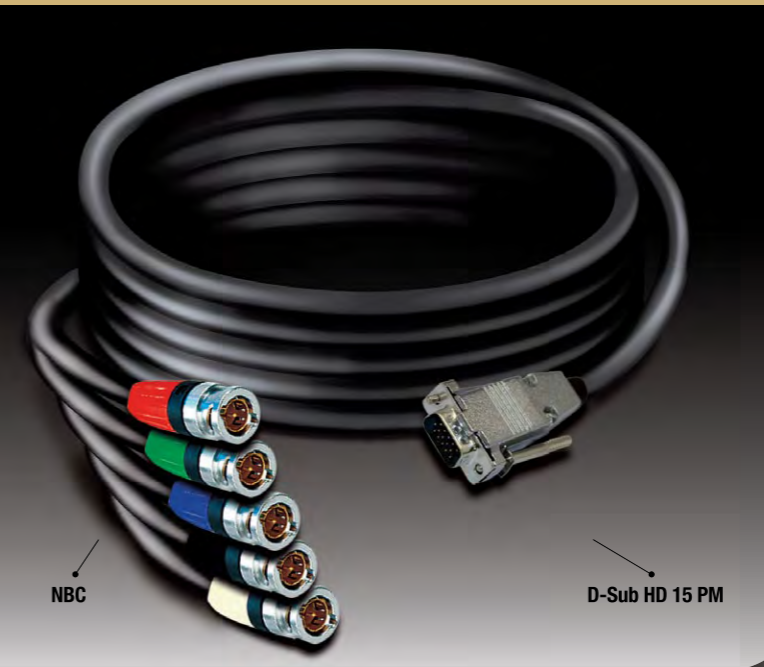

### APPLICATIONS

Flexible cable composed of: 5 mini-coaxial cables for video R.G.B. +H.V. transmission on professional video systems and for Monitors and video-projectors. Cable for fixed and mobile installation, suitable for the realization of video assembly.

### CHARACTERISTICS

**Conductors:** stranded in O.F.C. red copper  
**Insulations:** PEE  
**Shields:** spiral covering 100% O.F.C. tinned copper  
**Sheaths:** PVC  
**Sheath colours:** Red, Green, Blue, Black, White  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II\*  
**Sheath colour:** Grey

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C263	5	5 X 75 Ω (0,08 MM²)	10 X 0,10	1,6	2,8	9,8	100	B	12,0
							300	B	
							500	B	

ATTENUATION DB/100MT						
50	100	200	400	800	1000	
MHZ	MHZ	MHZ	MHZ	MHZ	MHZ	
19,5	28,5	41,7	60,2	87,3	103,0	


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C263	5	5 X 75 Ω (0,08 MM²)	10 X 0,10	1,6	2,8	9,8	100	B	12,0
							300	B	
							500	B	

ATTENUATION DB/100MT						
50	100	200	400	800	1000	
MHZ	MHZ	MHZ	MHZ	MHZ	MHZ	
19,5	28,5	41,7	60,2	87,3	103,0	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE PROPAGATION
Ω/Km ± 5%	PF/mt	PF/mt	%	AC-V	V	°C
210		67	66	75	49	-15/+70

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE PROPAGATION
Ω/Km ± 5%	PF/mt	PF/mt	%	AC-V	V	°C
210		67	66	75	49	-15/+70

VDS15P263 GREY			
PART NR.	COLOR	LENGTH	PACK. UNIT
VDS15P2633	GREY	3 M	1
VDS15P2636	GREY	6 M	1
VDS15P26312	GREY	12 M	1
VDS15P26318	GREY	18 M	1
VDS15P26324	GREY	24 M	1




VD15NBT263 GREY			
PART NR.	COLOR	LENGTH	PACK. UNIT
VD15NBT2633	GREY	3 M	1
VD15NBT2636	GREY	6 M	1
VD15NBT2639	GREY	9 M	1
VD15NBT26312	GREY	12 M	1
VD15NBT26318	GREY	18 M	1
VD15NBT26324	GREY	24 M	1



# Video Cables

## VGA Cables: Cable Tasker C258

Connectors: D-Sub HD 15 P – D-Sub HD 15 P


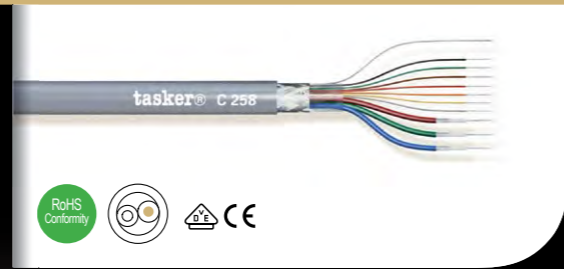


### APPLICATIONS

Special shielded cable composed of: 3 mini-coaxial cables and 7 insulated cores for installation and connection of VGA and XGA Monitors and other special video applications.

## VGA Cables: Cable Tasker C263

Connectors: Neutrik BNC – D-Sub HD 15 P

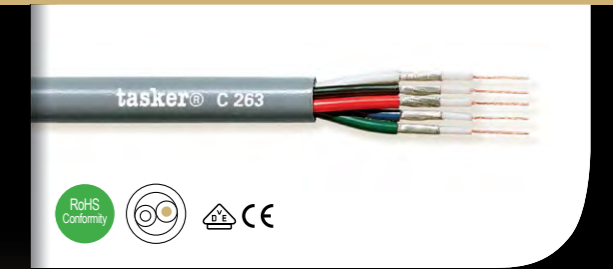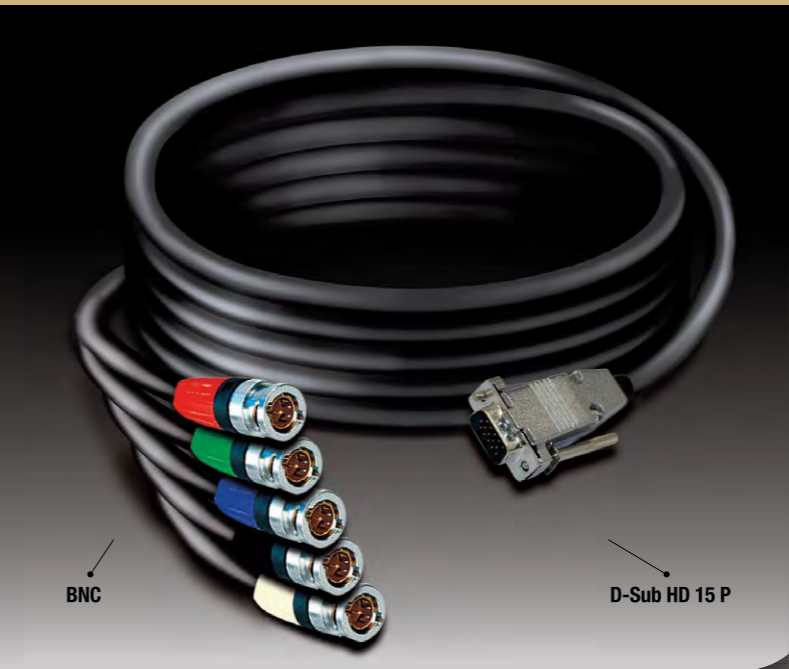

### APPLICATIONS

Flexible cable composed of: 5 mini-coaxial cables for video R.G.B. +H.V. transmission on professional video systems and for Monitors and video-projectors. Cable for fixed and mobile installation, suitable for the realization of video assembly.

### CHARACTERISTICS

**Conductors:** stranded in O.F.C. red copper  
**Insulations:** PEE  
**Shields:** spiral covering 100% O.F.C. tinned copper  
**Sheaths:** PVC  
**Sheath colours:** Red, Green, Blue, Black, White  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Grey

### CHARACTERISTICS

**Conductors:** stranded in O.F.C. tinned copper  
**Insulations:** PEE  
**Shields:** spiral covering 100% O.F.C. tinned copper  
**Sheaths:** PVC type HT 105°  
**Sheath colours:** Red, Green, Blue

### INSULATED CORES

**Conductors:** stranded in O.F.C. tinned copper  
**Insulations:** PVC type HT 105°  
**Core colours:** White, Brown, Red, Orange, Yellow, Green, Black

**Total tape:** transparent Polyester

**Drain wire:** stranded in O.F.C. tinned copper  
**Total Shield:** Braided covering 80% O.F.C. tinned copper  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Grey

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTER-NAL INNER SHEATH	EXTER-NAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C258	5	5 X 75 Ω (0,08 MM <sup>2</sup> )	7 X 0,12	1,4	2,8	9,8	100	B	12,0
		+7 X 0,08 (28 AWG)	7 X 0,12	0,9	300		B		
					500		B		

ATTENUATION DB/100MT						
50 MHZ	100 MHZ	200 MHZ	400 MHZ	800 MHZ	1000 MHZ	
19,7	28,7	42,0	61,2	88,5	105,0	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE PROPAGATION
Ω/Km ± 5%	PF/mt	PF/mt	%	AC-V	V	°C
210		67	66	75	49	-15/+70

VD15P15P258 GREY			
PART NR.	COLOR	LENGTH	PACK. UNIT
VD15P15P2583	GREY	3 M	1
VD15P15P2586	GREY	6 M	1
VD15P15P2589	GREY	9 M	1
VD15P15P25812	GREY	12 M	1
VD15P15P25818	GREY	18 M	1
VD15P15P26324	GREY	24 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTER-NAL INNER SHEATH	EXTER-NAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C263	5	5 X 75 Ω (0,08 MM <sup>2</sup> )	10 X 0,10	1,6	2,8	9,8	100	B	12,0
							300	B	
							500	B	

ATTENUATION DB/100MT						
50 MHZ	100 MHZ	200 MHZ	400 MHZ	800 MHZ	1000 MHZ	
19,5	28,5	41,7	60,2	87,3	103,0	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE PROPAGATION
Ω/Km ± 5%	PF/mt	PF/mt	%	AC-V	V	°C
210		67	66	75	49	-15/+70


VD15PNBA263 GREY			
PART NR.	COLOR	LENGTH	PACK. UNIT
VD15PNBA263	GREY	0.30 M	1



# Video Cables

## VGA Cables: Cable Tasker C263

Connectors: Neutrik BNC – D-Sub 15 P

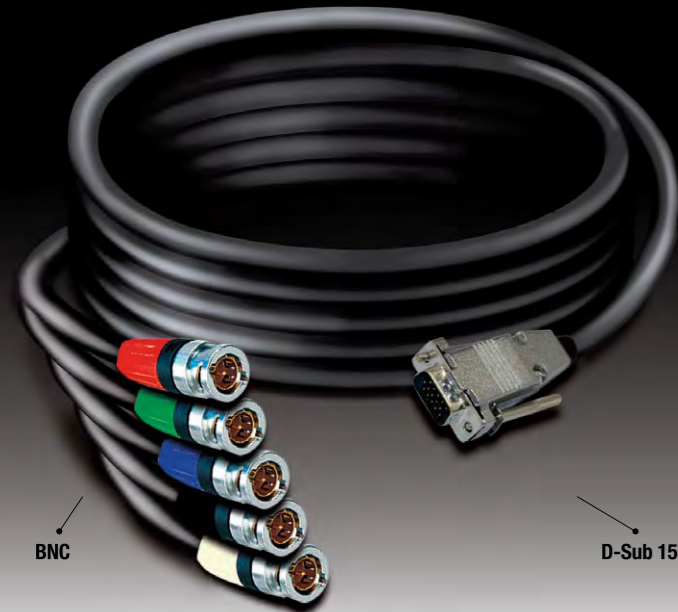

### APPLICATIONS


Flexible cable composed of: 5 mini-coaxial cables for video R.G.B. +H.V. transmission on professional video systems and for Monitors and video-projectors. Cable for fixed and mobile installation, suitable for the realization of video assembly.

### CHARACTERISTICS

**Conductors:** stranded in O.F.C. red copper  
**Insulations:** PEE  
**Shields:** spiral covering 100% O.F.C. tinned copper  
**Sheaths:** PVC  
**Sheath colours:** Red, Green, Blue, Black, White  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II\*  
**Sheath colour:** Grey

## HDMI Cables: Cable Tasker HDMI TSK1060

Connectors: 2x Tasker 460

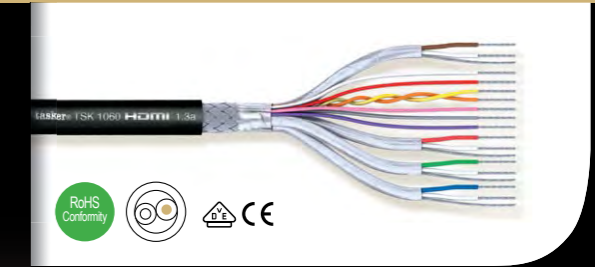

### APPLICATIONS

The cable HDMI Tasker TSK 1060 in the version HIGH SPEED supports a double frequency of transmission respect to the previous HDMI formats; a maximum band wideness at 340 MHz same as 10,2 Gbps (maximum data rate). Cable that allows a high level of chromatic transmissions from 24 till to 48 bit, shade definitions and colour depth beyond the human eye perception, video resolution 1920x1080p - 120Hz. The HIGH SPEED cables can be however applied also on higher resolution displays like WQXGA screens with cinema resolution (2560x1440p). Even the digital audio transmission gets improved with the increase of transmission speed solving problems connected to the labial synchronism (playback) and supporting the new audio tracks at high band like: Dolby Digital, DTS (compressed) and Dolby True HD e DTS HD-Master Audio (uncompressed)

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C263	5	5 X 75 Ω (0,08 MM²)	10 X 0,10	1,6	2,8	9,8	100	B	12,0
							300	B	
							500	B	

ATTENUATION DB/100MT						
50	100	200	400	800	1000	
MHZ	MHZ	MHZ	MHZ	MHZ	MHZ	
19,5	28,5	41,7	60,2	87,3	103,0	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHEILD	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE PROPAGATION
Ω/Km ± 5%	PF/mt	PF/mt	%	AC-V	V	°C
210		67	66	75	49	-15/+70

VD15PMNB263 GREY			
PART NR.	COLOR	LENGTH	PACK. UNIT
VD15PMNB263	GREY	0.30 M	1



### CHARACTERISTICS

4x(2cx24) AWG: **Cond. number:** n°4x 2c  
**Conductors:** stranded in O.F.C. tinned copper  
**Insulations:** FM-PE + SKIN  
**Pair colours:** White/Brown, White/Red, White/Blue, White/Green  
**Drain Wire:** stranded in O.F.C. tinnedcopper  
**Shields:** All/Mylar tape covering 100%

1x2x24 AWG: **Pairs number:** n°1  
**Conductors:** stranded in O.F.C. tinned copper  
**Insulations:** HD-PE  
**Core colours:** Yellow/Orange  
**5cx24 AWG - Insulated cores**  
**Conductors:** stranded in O.F.C. tinned copper  
**Insulations:** PPE

**Core colours:** White, Red, Pink, Grey, Purple  
**Grouping 1° Shield:** All/Mylar tape - covering 100%  
**II°Shield:** Braided in O.F.C. tinned copper covering 80%  
**Sheath:** PVC Flame Retardant LOW TOXIC UL VW 1  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL	CONDUCTOR RESISTANCE	IMPEDANCE	RATED VOLTAGE
		mm²	mm.	Ø mm.	Ø mm.	Ø mm.	mt	Ω/Km ± 5%	Ω ± 10%	AC-V
TSK1060	4 X 2C	4 X (2C X 0,22) (24 AWG)	7 X 0,20	1,55			100	93		
	+1 X 2	1 X 2 X 0,22 (24 AWG)	7 X 0,20	1,30		9,6	50	93	100	30
	+5C	5 X 0,22 (24 AWG)	7 X 0,20	1,30				93		

ATTENUATION DB/100MT						
50	100	200	400	800	1000	
MHZ	MHZ	MHZ	MHZ	MHZ	MHZ	
19,5	28,5	41,7	60,2	87,3	103,0	

PROPAGATION DELAY SKEW	
INTRA PAIR MAX.	INTRA PAIR MAX.
111PS/CABLE	1,78NS/CABLE


HDMI1060T BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HDMI1060T1	BLACK	1 M	1
HDMI1060T2	BLACK	2 M	1
HDMI1060T3	BLACK	3 M	1
HDMI1060T6	BLACK	6 M	1
HDMI1060T12	BLACK	12 M	1
HDMI1060T18	BLACK	18 M	1
HDMI1060T24	BLACK	24 M	1
HDMI1060T30	BLACK	30 M	1



# Video Cables

## HDMI Cables: Cable Tasker TSK1062 with High Speed Ethernet

Connectors: 2x Tasker 460

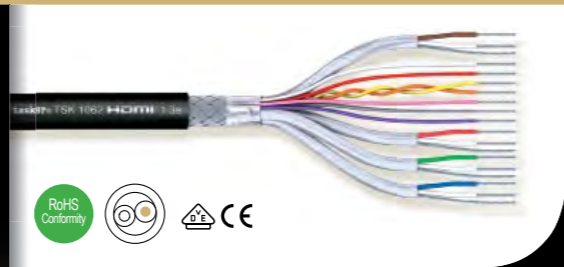

### APPLICATIONS

The New cable HDMI Tasker TSK 1062 in the version HIGH SPEED with Ethernet currently represents the most advanced project of HDMI cable that besides all the features of the other HDMI HIGH SPEED cables allows: -3D formats -scanning at 240Hz -bidirectional communication, data connection and Ethernet till 100 -Mbps and streaming of the Audio flow -HEC functions (HDMI Ethernet Channel) -return channel for Audio -resolution till 4096 x 2160 pixel at 24 fps and 30Hz -ACE functions (Automatic Content Enhancement) Tasker TSK 1062 is suitable to any HDMI applications including the Blu-ray Disc player systems and to all the installations in public buildings, civil and domestic.

**Core colours:** White, Red, Orange, Yellow  
**Grouping 1° Shield:** All/Mylar tape – covering 100%  
**II°Shield:** Braided in O.F.C. tinned copper covering 80%  
**Sheath:** PVC Flame Retardant – LOW TOXIC UL VW 1  
**Sheath colour:** Black

## Cables: HDMI Super High Resolution Cables

Connectors: HDMI - HDMI



### HDMI TO DVI-D SUPER HIGH RESOLUTION COPPER CABLES

DVIgear's Super High Resolution™ (SHR™) HDMI cables are engineered for superior performance and reliability. Designed for fully transparent operation with bit rates up to 2.25 Gbit/sec., DVIgear's SHR cables set a new benchmark for performance and durability.

### CHARACTERISTICS

4x(2cx24) AWG: **Cond. number:** n°5x 2c

**Conductors:** stranded in O.F.C. tinned copper

**Insulations:** FM-PE + SKIN

**Pair colours:** White/Brown, White/Red, White/Blue, White/Green

**Drain Wire:** stranded in O.F.C. tinned copper

**Shields:** All/Mylar tape – covering 100%

4cx2x24 AWG: **Insulated cores**

**Conductors:** stranded in O.F.C. tinned copper

**Insulations:** HD-PE

**Core colours:** Yellow/Orange

5cx24 AWG - **Insulated cores**

**Conductors:** stranded in O.F.C. tinned copper

**Insulations:** PPE

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL	CONDUCTOR RESISTANCE	IMPEDANCE	RATED VOLTAGE
		mm <sup>2</sup>	mm.	Ø mm.	Ø mm.	Ø mm.	mt	Ω/Km ± 5%	Ω ± 10%	AC-V
TSK1062	5 X 2C	5 X (2C X 0.22) (24 AWG)	7 X 0.20	1,55			100	93		
	+4C	4 X 0.22 (24 AWG)	7 X 0.20	1,30		9,8	** 50	93	100	30
							**25			

\*\* 25 AND 50 METRES ON DEMAND

ATTENUATION DB/10MT			
MHZ	GHZ	GHZ	GHZ
0,30 ÷ 825 MHZ	0,825 ÷ 2,475 GHZ	2,475 ÷ 4,125 GHZ	4,125 ÷ 5,100 GHZ
< 7	< 12	< 20	< 25

PROPAGATION DELAY SKEW	
INTRA PAIR MAX.	INTER PAIR MAX.
111PS/CABLE	1,78NS/CABLE

HDMI1062 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HDMI1062E1	BLACK	1 M	1
HDMI1062E2	BLACK	2 M	1
HDMI1062E3	BLACK	3 M	1
HDMI1062E6	BLACK	6 M	1
HDMI1062E12	BLACK	12 M	1
HDMI1062E18	BLACK	18 M	1
HDMI1062E24	BLACK	24 M	1
HDMI1062E30	BLACK	30 M	1

### FEATURES

- All cables 12.5 meters or longer include DVIgear® ACE™ (Active Cable Extender) and a 0.5 meter cable
- Supports HDMI with "Deep Color" HDTV resolutions up to 1080p (12-bit)
- Supports HDMI Category 2 data rates (3.4 Gbit/sec.) lengths up to 7.5 meters
- Supports HDMI data rates up to 2.25 Gbit/sec. lengths up to 40 meters
- Supports PC data rates up to 1.65 Gbit/sec. lengths up to 60 meters
- Supports PC resolutions up to 1600x1200/60 Hz and 1920x1200/60 Hz

- Heavy-duty 22AWG copper wires for minimum insertion loss
- Ultra-low Skew guarantees unsurpassed digital fidelity
- Triple shielded for superior noise immunity
- Dual UL Ratings: UL13 (CL2) and UL758 (AWM20276)
- In-Wall Rated
- RoHS compliant (green friendly)
- Gold plated connectors

DVI-2500-SHR BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
DVI-2501-SHR	BLUE	1 M	1
DVI-2503-SHR	BLUE	3 M	1
DVI-2505-SHR	BLUE	5 M	1
DVI-2510-SHR	BLUE	10 M	1
DVI-2515-SHR	BLUE	15 M	1
DVI-2520-SHR	BLUE	20 M	1



# Video Cables

Cables: HDMI High Resolution Cables

Connectors: HDMI - HDMI

Cables: HDMI to DVI-D Super High Resolution Cables

Connectors: HDMI - DVI-D



**HDMI HIGH RESOLUTION COPPER CABLES**

These High Resolution (HR) HDMI cables are engineered for value, great performance and reliability. Designed for fully transparent operation with single-link bit rates up to 2.25 Gbit/sec., DVI Gear's HR cables set a new benchmark for quality on a budget.



**HDMI TO DVI-D SUPER HIGH RESOLUTION COPPER CABLES**

DVI Gear's Super High Resolution™ (SHR™) HDMI to DVI cables are engineered for superior performance and reliability. Designed for fully transparent operation with bit rates up to 2.25 Gbit/sec., DVI Gear's SHR cables set a new benchmark for performance and durability.

**FEATURES**

- Supports HDMI with "Deep Color" HDTV resolutions up to 1080p (12-bit)
- Supports HDMI Category 2 data rates (3.4 Gbit/sec.) up to 5 meters
- Supports HDMI data rates up to 2.25 Gbit/sec. all lengths
- Supports PC resolutions up to 1920x1200 / 60 Hz
- Heavy-duty 24AWG copper wires for minimum insertion loss
- Ultra-low Skew guarantees unsurpassed digital fidelity
- Triple shielded for superior noise immunity
- Dual UL Ratings: UL13 (CL2) and UL758 (AWM20276)
- In-Wall Rated
- RoHS compliant (green friendly)
- Gold plated connectors

**FEATURES**

- All cables 12.5 meters or longer include DVI Gear ACE™ (Active Cable Extender) and a 0.5 meter cable
- Supports HDMI with "Deep Color" HDTV resolutions up to 1080p (12-bit)
- Supports HDMI Category 2 data rates (3.4 Gbit/sec.) lengths up to 7.5 meters
- Supports HDMI data rates up to 2.25 Gbit/sec. lengths up to 40 meters
- Supports PC data rates up to 1.65 Gbit/sec. lengths up to 60 meters
- Supports PC resolutions up to 1600x1200/60 Hz and 1920x1200 / 60 Hz
- Heavy-duty 22AWG copper wires for minimum insertion loss
- Ultra-low Skew guarantees unsurpassed digital fidelity
- Triple shielded for superior noise immunity
- Dual UL Ratings: UL13 (CL2) and UL758 (AWM20276)
- In-Wall Rated
- RoHS compliant (green friendly)
- Gold plated connectors

DVI-2500-HR RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
DVI-2501-HR	RED	1 M	1
DVI-2503-HR	RED	3 M	1
DVI-2505-HR	RED	5 M	1
DVI-2507-HR	RED	10 M	1



DVI-2400-SHR BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
DVI-2401-SHR	BLUE	1 M	1
DVI-2403-SHR	BLUE	3 M	1
DVI-2405-SHR	BLUE	5 M	1
DVI-2410-SHR	BLUE	10 M	1
DVI-2415-SHR	BLUE	15 M	1
DVI-2430-SHR	BLUE	30 M	1
DVI-2450-SHR	BLUE	50 M	1



# Video Cables

Cables: HDMI to DVI-D High Resolution Cables

Connectors: HDMI - DVI-D



**HDMI TO DVI HIGH RESOLUTION COPPER CABLES**

These High Resolution (HR) HDMI to DVI cables are engineered for value, great performance and reliability. Designed for fully transparent operation with single-link bit rates up to 2.25 Gbit/sec., DVIgear's HR cables set a new benchmark for quality on a budget.

Cables: DVI-D Super High Resolution Cables

Connectors: 2x DVI-D



**DVI-D SUPER HIGH RESOLUTION COPPER CABLES**

DVIgear's Super High Resolution™ (SHR™) DVI cables are engineered for superior performance and reliability. Designed for fully transparent operation with bit rates up to 2.25 Gbit/sec., DVIgear's SHR cables set a new benchmark for performance and durability.

**FEATURES**

- Supports HDMI with "Deep Color" HDTV resolutions up to 1080p (12-bit)
- Supports HDMI Category 2 data rates (3.4 Gbit/sec.) up to 5 meters
- Supports HDMI data rates up to 2.25 Gbit/sec. all lengths
- Supports PC resolutions up to 1920x1200/60 Hz
- Heavy-duty 24AWG copper wires for minimum insertion loss
- Ultra-low Skew guarantees unsurpassed digital fidelity
- Triple shielded for superior noise immunity
- Dual UL Ratings: UL13 (CL2) and UL758 (AWM20276)
- In-Wall Rated
- RoHS compliant (green friendly)
- Gold plated connectors

**FEATURES**

- All cables 12.5 meters or longer include DVIgear ACE™ (Active Cable Extender) and a 0.5 meter cable
- Supports HDMI with "Deep Color" HDTV resolutions up to 1080p (12-bit)
- Supports HDMI Category 2 data rates (3.4 Gbit/sec.) lengths up to 7.5 meters
- Supports HDMI data rates up to 2.25 Gbit/sec. lengths up to 40 meters
- Supports PC data rates up to 1.65 Gbit/sec. lengths up to 60 meters
- Supports PC resolutions up to 1600x1200/60 Hz and 1920x1200 / 60 Hz
- Heavy-duty 22AWG copper wires for minimum insertion loss
- Ultra-low Skew guarantees unsurpassed digital fidelity
- Triple shielded for superior noise immunity
- Dual UL Ratings: UL13 (CL2) and UL758 (AWM20276)
- In-Wall Rated
- RoHS compliant (green friendly)
- Gold plated connectors

DVI-2400-HR RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
DVI-2401-HR	RED	1 M	1
DVI-2403-HR	RED	3 M	1
DVI-2405-HR	RED	5 M	1
DVI-2407-HR	RED	7.5 M	1



DVI-2300-SHR BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
DVI-2301-SHR	BLUE	1 M	1
DVI-2303-SHR	BLUE	3 M	1
DVI-2305-SHR	BLUE	5 M	1
DVI-2310-SHR	BLUE	10 M	1
DVI-2315-SHR	BLUE	15 M	1
DVI-2330-SHR	BLUE	30 M	1
DVI-2350-SHR	BLUE	50 M	1



# Video Cables

**Cables:** DVI-D High Resolution Cables

**Connectors:** 2x DVI-D



**DVI-D HIGH RESOLUTION COPPER CABLES**

These High Resolution (HR) HDMI to DVI cables are engineered for value, great performance and reliability. Designed for fully transparent operation with single-link bit rates up to 2.25 Gbit/sec., DVI Gear's HR cables set a new benchmark for quality on a budget.

**Device:** DVI + HDCP Repeater DVI-7160

**Connections:** DVI in and out



**PRODUCT DESCRIPTION**

The DVI-7160 is a high-performance HDCP compliant DVI repeater that digitally regenerates the incoming signal with an extremely high degree of fidelity such that the output signal can transverse much longer cable distances than normally possible. The unit is compatible with the full spectrum of single-link DVI signals with pixel rates up to 165 MHz (1.65 GBit/sec.), which enable complete transparency with DVI signals having HDTV resolutions up to **1080p** and PC resolutions up to **1920x1200/60Hz**.

When used with DVI Gear's SHR™ cables, up to four repeaters can be cascaded to extend cable lengths up to 75 meters (~ 250 ft.). A single unit can be used to extend DVI cables up to 30 meters (~ 100 ft.). This repeater includes a DDC (EDID) pass-through function to ensure proper recognition of the connected downstream display.

**Note:** To ensure optimum performance, you should use DVI Gear's Super High Resolution™ cables with this product.

DVI-7160

**FEATURES**

- Supports HDMI with "Deep Color" HDTV resolutions up to 1080p (12-bit)
- Supports HDMI Category 2 data rates (3.4 Gbit/sec.) up to 5 meters
- Supports HDMI data rates up to 2.25 Gbit/sec. all lengths
- Supports PC resolutions up to 1920x1200/60 Hz
- Heavy-duty 24AWG copper wires for minimum insertion loss
- Ultra-low Skew guarantees unsurpassed digital fidelity
- Triple shielded for superior noise immunity
- Dual UL Ratings: UL13 (CL2) and UL758 (AWM20276)
- In-Wall Rated
- RoHS compliant (green friendly)
- Gold plated connectors

**SPECIFICATIONS**

RESOLUTIONS	
Supported HDTV Resolutions	480p, 720p, 1080i, 1080p
Standard TV Resolution	480i
Supported PC Resolutions	Up to 1920 x 1200/60Hz
Maximum Pixel Frequency	Up to 165 MHz
Maximum DVI Bit Rate	Up to 1.65 GBit/sec.
Maximum Cable Distance	Up to 50ft. (15m) using DVI Gear's Super High Resolution™ cables
I/O CONNECTORS	
DVI Input	1x DVI-I Female
DVI Output	1x DVI-I Female

DVI-7160	
PART NR.	PACK. UNIT
DVI-7160	1

DVI-2300-HR RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
DVI-2301-HR	RED	1 M	1
DVI-2303-HR	RED	3 M	1
DVI-2305-HR	RED	5 M	1
DVI-2307-HR	RED	7.5 M	1



# Video Cables

Device: HDMI Active Cable Extender DVI-7370

Connections: HDMI in and out

Device: DVI Single Link Active Cable Extender DVI-7171b

Connections: DVI in and out



**PRODUCT DESCRIPTION**  
 DVI Gear's ACE™ (Active Cable Extender) is a state-of-the-art dynamic equalizer that performs high speed cable compensation on long DVI and HDMI cables. This unit provides up to 40 dB of insertion loss correction at 825 MHz and automatically adapts to any cable length connected.

When used in conjunction with DVI Gear's line of Super High Resolution™ DVI and HDMI cables, aggregate cable lengths of up to 60 meters (or more) are possible while maintaining full compliance with all DVI and HDMI signal parameters. The combination of these products is an **active cable** assembly that rivals the performance of DVI and HDMI fiber cables at a fraction of the cost, while providing superior ruggedness and durability.



**PRODUCT DESCRIPTION**  
 DVI Gear's ACE™ (Active Cable Extender) is a state-of-the-art dynamic equalizer that performs high speed cable compensation on long DVI and HDMI cables. This unit provides up to 40 dB of insertion loss correction at 825 MHz and automatically adapts to any cable length connected.

When used in conjunction with DVI Gear's line of Super High Resolution™ DVI and HDMI cables, aggregate cable lengths of up to 60 meters (or more) are possible while maintaining full compliance with all DVI and HDMI signal parameters. The combination of these products is an **active cable** assembly that rivals the performance of DVI and HDMI fiber cables at a fraction of the cost, while providing superior ruggedness and durability.

**SPECIFICATIONS**

Compliance	HDMI v1.3, HDCP v1.1, DVI v1.0
Maximum Pixel Clock Frequency	225 MHz
Maximum Video Bit Rate	2.25 Gbps (single-link)
Supported Color Depth	8-bit, 10-bit, and 12-bit
Digital Audio Support	Dolby Digital, Dolby Digital Plus, Dolby True HD and DTS-HD Master Audio - only with HDMI input signal
Supported HDTV Formats	480i, 480p, 576i, 576p, 720p, 1080i and 1080p
Supported PC Resolutions	up to 1920x1200
Input Signal Equalization	+40 dB correction @ 825MHz
Cable Equalization Modes	Auto Mode - for cable lengths up to 30 meters Manual Mode - for cable lengths longer than 30 meters
Maximum Input Cable Length*	50 meters (164 ft) @ 1.65 Gbps 40 meters (131 ft) @ 2.25 Gbps *using DVI Gear SHR™ Series cables
Maximum Output Cable Length	5 meters (16.4 ft.) using DVI Gear SHR™ Series cables
<b>I/O CONNECTORS</b>	
Input	1x HDMI 19-pin female connector
Output	1x HDMI 19-pin female connector

DVI-7370	
PART NR.	PACK. UNIT
DVI-7370	1

**SPECIFICATIONS**

Compliance	DVI v1.0, HDMI v1.3, HDCP v1.1
Maximum Pixel Clock Frequency	225 MHz
Maximum Video Bit Rate	2.25 Gbps (single-link)
Supported Color Depth	8-bit, 10-bit, and 12-bit
Digital Audio Support	Dolby Digital, Dolby Digital Plus, Dolby True HD and DTS-HD Master Audio - only with HDMI input signal
Supported HDTV Formats	480i, 480p, 576i, 576p, 720p, 1080i and 1080p
Supported PC Resolutions	up to 1920x1200
Input Signal Equalization	+40 dB correction @ 825MHz
Cable Equalization Modes	Auto Mode - for cable lengths up to 30 meters Manual Mode - for cable lengths longer than 30 meters
Maximum Input Cable Length*	50 meters (164 ft) @ 1.65 Gbps 40 meters (131 ft) @ 2.25 Gbps *using DVI Gear SHR™ Series cables
Maximum Output Cable Length	5 meters (16.4 ft.) using DVI Gear SHR™ Series cables
<b>I/O CONNECTORS</b>	
Input	1x DVI 29-pin female connector
Output	1x DVI 29-pin female connector

DVI-7171b	
PART NR.	PACK. UNIT
DVI-7171b	1

Video: HDMI/DVI Extenders/Repeaters

Video: HDMI/DVI Extenders/Repeaters

# Video Cables

**Device:** DVI Dual Link Active Cable Extender DVI-7176a

**Connections:** DVI in and out



**PRODUCT DESCRIPTION**

DVI Gear's ACE™ (Active Cable Extender) is a state-of-the-art dynamic equalizer that performs high speed cable compensation on long DVI and HDMI cables. This unit provides up to 40 dB of insertion loss correction at 825 MHz and automatically adapts to any cable length connected.

When used in conjunction with DVI Gear's line of Super High Resolution™ DVI and HDMI cables, aggregate cable lengths of up to 60 meters (or more) are possible while maintaining full compliance with all DVI and HDMI signal parameters. The combination of these products is an **active cable** assembly that rivals the performance of DVI and HDMI fiber cables at a fraction of the cost, while providing superior ruggedness and durability.

**Cables:** 4x 50/125µm LC Multi-Mode Fiber

**Connectors:** HDMI – HDMI Transmitter and Receiver



**HDMI FIBER OPTIC CABLES**

DVI Gear's HDMI extended length fiber optic cables provide unmatched signal fidelity and transparency over a wide range of input resolutions with cable lengths up to 100 meters. These cables utilize high speed fiber-optic converters integrated within each connector that convert the digital input signals into optical pulses, and then back again at the display. The cable material is an innovative hybrid design consisting of 4 high-speed glass fibers and 5 copper wires, which offers a high degree of ruggedness and flexibility. These features make these cables especially well suited for critical display applications that demand flawless HDMI signal integrity over very long cable runs.

**SPECIFICATIONS**

Compliance	DVI v1.0, HDMI v1.3, HDCP v1.1
Maximum Pixel Clock Frequency	225 MHz
Maximum Video Bit Rate	2.25 Gbps (single-link)
Supported Color Depth	8-bit, 10-bit, and 12-bit
Digital Audio Support	Dolby Digital, Dolby Digital Plus, Dolby True HD and DTS-HD Master Audio - only with HDMI input signal
Supported HDTV Formats	480i, 480p, 576i, 576p, 720p, 1080i and 1080p
Supported PC Resolutions	up to 3840x2400
Input Signal Equalization	+40 dB correction @ 825MHz
Cable Equalization Modes	Auto Mode - for cable lengths up to 30 meters Manual Mode - for cable lengths longer than 30 meters
Maximum Input Cable Length*	50 meters (164 ft) @ 1.65 Gbps 40 meters (131 ft) @ 2.25 Gbps *using DVI Gear SHRD™ Series cables
Maximum Output Cable Length	5 meters (16.4 ft.) using DVI Gear SHRD™ Series cables
<b>I/O CONNECTORS</b>	
Input	1x DVI 29-pin female connector
Output	1x DVI 29-pin female connector

DVI-7176a	
PART NR.	PACK. UNIT
DVI-7176a	1

**FEATURES**

- Supports HDTV resolutions up to 1080p with 12-bit color
- Supports PC resolutions up to 1600x1200 and 1920x1200
- Supports digital bit-rates up to 3.00 GBit/sec.
- Optical fiber transmission is immune to environmental signal noise
- Low RFI / EMI profile ideal for sensitive applications

- Supports bi-directional DDC communications, fully HDCP compliant
- Can be powered by HDMI source, or using supplied +5VDC external power supply
- Rugged yet pliable construction
- RoHS compliant

**SPECIFICATIONS**

<b>CONNECTIONS</b>	
Input/Output	19-pin female HDMI connectors
Power	3.5mm jack
<b>RESOLUTION:</b>	
PCs	Supports all single-link resolutions up to 1600x1200 and 1920x1200
HDTV	Supports HDTV resolutions up to 1080p and 2048x1080
Color Depth	Supports 1080p/12-bit color
<b>BANDWIDTH</b>	
Pixel Rates	Supports pixel clock rates up to 300 MHz
Bit Rates	Supports digital signal bit rates up to 3.00 GBit/sec
<b>OPTICAL</b>	
Optical Transmitter	Tx Module: 850 nm VCSEL, Class 1 laser product
Optical Receiver	Rx Module: PIN Photo Diode
Fiber Cable	4x 50/125µm LC multi-Mode Fiber
<b>CABLE CONSTRUCTION</b>	
Available Lengths (meters)	10, 15, 20, 25, 30, 40, 50, 75, 100
Cable Jacket	FR, PVC (orange)
Cable Outside Diameter	7.4 mm ± 0.20mm
<b>DDC SUPPORT</b>	
EDID Support	EDID communications are fully supported
HDCP Support	HDCP communications are fully supported
<b>POWER</b>	
Internal Power (from HDMI source)	Requires at least 350 ma of DC current from pin 18 of HDMI source
External Power Supply	Input: 100-240VAC, 50-60Hz 0.2A/ Output: +5VDC @ 0.5A
Power Consumption	Maximum: 1.8 watts

<b>MECHANICAL</b>	
Construction	High impact metal alloy enclosures
Connector Dimensions (L x W x H)	Tx Unit: 2.05" x 1.39" x 0.59" (52.0 x 35.4 x 15.0 mm) Rx Unit: 2.03" x 0.91" x 0.59" (51.5 x 23.0 x 15.0 mm)
Weight	Varies by length
Maximum Tensile Load	Short Term: 245 N
Maximum Bend Radius	Short Term: 25 mm/Long Term: 40 mm Short Term: 490 N/50 mm section
Crush Resistance	-4° to +158° F (-20° to +70° C)
Operation	+32° to +122° F (0° to +50° C)
Relative Humidity	10% to 80%
<b>COMPLIANCE</b>	
These cables are RoHS and CE compliant.	
<b>ACCESSORIES INCLUDED</b>	
2x 0.5 meter Male/Male HDMI cables, 1x External Power Adaptor with modular USA and Euro Plugs, 1x User Guide	

DVI-250-FO ORANGE			
PART NR.	COLOR	LENGTH	PACK. UNIT
DVI-2510-FO	ORANGE	10 M	1
DVI-2520-FO	ORANGE	20 M	1
DVI-2530-FO	ORANGE	30 M	1
DVI-2540-FO	ORANGE	40 M	1
DVI-2550-FO	ORANGE	50 M	1
DVI-2575-FO	ORANGE	75 M	1
DVI-25100-FO	ORANGE	100 M	1
DVI-2500-FO-PSE	POWERSUPPLY		1



# Video Cables

**Device:** Fiber Optic Cable Extender DVI-7350

**Connections:** HDMI – 4x LC (+RJ45) Optical Transmitter and Receiver



**PRODUCT DESCRIPTION**

The model DVI-7350 is a high-speed fiber optic transport system capable of distributing high resolution HDMI or DVI signals over cable lengths up to 100 meters (328 ft.) while maintaining flawless image quality. HDMI input signals from a source device such as a set-top box or Blu-Ray player are converted into light pulses by an optical transmitter module for transmission over 4 strands of multi-mode fiber optic cable. On the display side, an optical receiver module converts the light pulses back to an HDMI signal for display on a monitor or projector. The unit provides a direct DDC link that supports monitor EDID/HDCP communications using a standard CAT5 cable. These features make the DVI-7350 the ideal solution for display applications that require flawless HDMI or DVI signal quality over very long cable runs.

**Device:** Single Link Fiber Optic Extender DVI-7310

**Connections:** DVI-D – 4x LC Optical Transmitter and Receiver



**HDMI FIBER OPTIC CABLES**

Designed to overcome the barriers of sending digital DVI signals over copper wires, the DVI-7310 Fiber Optic Extender provides unequalled signal fidelity and transparency over a wide range of input resolutions and supports cable lengths up to 500 meters (1,640 ft.). The unit consists of a high-speed optical transmitter module that converts the DVI input signals into light pulses for transmission over 4 detachable glass fibers, and an optical receiver module that converts the light pulses back to a DVI signal for display on a monitor or projector. A programmable memory chip provides EDID support for any display without the need for a copper cable. These features make the DVI-7310 the ideal solution for critical display applications that demand flawless DVI signal quality over very long cable runs.

**FEATURES**

- Supports HDTV resolutions up to 1080p with 12-bit color
- Supports PC resolutions up to 1920x1200 and 2048x1080 pixels
- Supports digital bit-rates up to 3.00 Gbps
- Optical fiber transmission is immune to environmental signal noise
- Low RFI/EMI profile for sensitive applications
- RJ45 (CAT5) connection supports bidirectional DDC/HDCP communications
- Transmitter unit can be powered by HDMI source or by optional +5VDC external power supply
- Receiver unit is powered by +5VDC external power supply
- Detachable optical cables greatly simplifies installation and maintenance

**SPECIFICATIONS**

<b>MODEL NUMBER</b>	
DVI-7350	HDMI Fiber Optic Extender
<b>CONNECTIONS</b>	
HDMI Input/HDMI Output	19-pin female HDMI connectors
Optical	4x LC type fiber optic connectors (R, G, B, Clock)
DDC	RJ-45 jack
Power	3.5 mm jack
<b>COMPLIANCE</b>	
HDMI Compliance	HDMI v1.3
HDCP Compliance	HDCP v1.3
Safety Compliance	RoHS, CE
<b>RESOLUTION</b>	
PC	Supports resolutions up to 1600x1200 and 1920x1080
HDTV	Supports HDTV resolutions up to 1080p and 2048x1080
<b>BANDWIDTH</b>	
Pixel Rates	Supports pixel clock rates up to 300 MHz
Bit Rates	Supports digital signal bit rates up to 3.00 Gbps
<b>OPTICAL</b>	
Optical Transmitter	Tx Module: VCSEL Lasers, Class 1 laser product
Optical Receiver	Rx Module: PIN Photo Diodes
Fiber Cable Type	50/125µ multi-mode optical fiber with 4x LC connectors per module
DVIgear Fiber Cable	OFNP, Plenum Rated PVC Jacket, Diameter 5.0 mm (additional data available upon request)
Cable Length	Maximum 100 meters / 328 ft. (limited by CAT5 cable length)

<b>POWER</b>	
Optical Transmitter	Tx module requires at least 100 ma of DC current from the HDMI source; an optional external power supply may be used if needed.
Optical Receiver	Must be powered using the supplied external power supply
External Power Supply	Input: 100-240VAC, 50-60Hz 0.5A Output: +5VDC @ 2.0A
Power Consumption	Maximum: 1.1 watts (for both Tx and Rx units)
<b>MECHANICAL</b>	
Construction	Rugged metal enclosure with jet black finish
Dimensions (L x W x H)	2.50" x 2.27" x 1.09" (63.5 mm x 57.6 mm x 27.7 mm)
Weight	Tx Unit: 0.27 lb. (122 g) Rx Unit: 0.27 lb. (122 g)
<b>ENVIRONMENTAL</b>	
Operation	32° to 122° F (0° to 50° C)
Storage	-4° to 158° F (-20° to 70° C)
Relative Humidity	10% - 80%
<b>ACCESSORIES INCLUDED</b>	
This product is RoHS and CE compliant	

<b>DVI-7350</b>	
<b>PART NR.</b>	<b>PACK. UNIT</b>
DVI-7350	1

**FEATURES**

- Supports HDTV resolutions up to 1080p
- Supports PC resolutions up to 1600x1200 and 1920x1200
- Supports digital bit-rates up to 1.65 Gbit/sec.
- Optical fiber transmission is immune to environmental signal noise
- Low RFI/EMI profile for sensitive application
- Built-in programmable EDID memory - eliminates the need for DDC connection.
- Transmitter unit can be powered by DVI source or by optional +5VDC external power supply.
- Receiver unit is powered by +5VDC external power supply.
- Detachable optical cables greatly simplify installation and maintenance.

**SPECIFICATIONS**

<b>CONNECTIONS</b>	
DVI Input/DVI Output	25-pin Male DVI-D connectors
Optical	4x LC fiber optic connectors
Power	3.5mm jack
<b>RESOLUTION</b>	
PC	Supports all Single-Link resolutions up to 1600x1200 and 1920x1200
HDTV	Supports HDTV resolutions up to 1080p and 2048x1080
<b>BANDWIDTH</b>	
Pixel Rates	Supports pixel clock rates up to 165 MHz
Bit Rates	Supports digital signal bit rates up to 1.65 Gbit/sec
<b>OPTICAL</b>	
Optical Transmitter	Tx Module: 850 nm VCSEL, Class 1 laser product
Optical Receiver	Rx Module: PIN Photo Diode
Fiber Cable	50/125µ LC multi-Mode Fiber with 4x LC connectors
<b>CABLE CONSTRUCTION:</b>	
Custom Lengths	Available on request, maximum length = 500 meters/1640 ft.
Cable Jacket	OFNP, Plenum Rated PVC Jacket (blue) or (red, green, blue, orange)
Cable Outside Diameter	2.9 x 6.0 mm (zip cable)
<b>DDC SUPPORT</b>	
EDID Support	An EDID memory built into the Tx module can learn and store the display's EDID info, thereby eliminating the need for a DDC connection using copper cables.
HDCP Support	HDCP communications are <b>NOT</b> supported!

<b>POWER</b>	
Optical Transmitter	Tx module requires at least 175 ma of DC current from pin 14 of DVI (source) connector. Optional external power supply may be used if needed.
Optical Receiver	Must be powered using the supplied external power supply
External Power Supply	Input: 100-240VAC, 50-60Hz 0.2A/ Output: +5VDC @ 0.5A
<b>MECHANICAL</b>	
Construction	High impact plastic enclosure with metallic finish
Dimensions (L x W x H)	2.75" x 1.56" x 0.59" (69.8 mm x 39.5 mm x 15.0 mm)
Weight	Net Weight: 0.14 lb. (65 g) Shipping Weight: 1.0 lb. (454 g)
<b>ENVIRONMENTAL</b>	
Operation	+32° to +122° F (0° to +50° C)
Storage	-4° to +158° F (-20° to +70° C)
Relative Humidity	10% - 80%
<b>ACCESSORIES INCLUDED</b>	
1x External AC Power Adapter, 1x User Guide	

<b>DVI-7310</b>	
<b>PART NR.</b>	<b>PACK. UNIT</b>
DVI-7310	1

# Video Cables

**Device:** Single Link Fiber Optic Extender 1x SC DVI-7315

**Connections:** DVI-D – 1x SC Optical Transmitter and Receiver



**PRODUCT DESCRIPTION**

The DVI-7315 Fiber Optic Extender is designed to route high resolution DVI signals up to 500 meters with unmatched signal fidelity and transparency. The unit consists of a high-speed optical transmitter module that converts the DVI input signals into light pulses for transmission over a single strand of multi-mode fiber optic cable, and an optical receiver module that converts the light pulses back to a DVI signal for display on a monitor or projector. A programmable memory chip provides EDID support for any display without the need for a copper cable. These features make the DVI-7315 the perfect solution for critical display applications that demand flawless DVI signal quality over very long cable runs.

**Device:** Dual Link Fiber Optic Extender 7x LC DVI-7320

**Connections:** DVI-D – 7x LC (RJ45) Optical Transmitter and Receiver



**HDMI FIBER OPTIC CABLES**

The DVI-7320 is a high-speed fiber optic transport system capable of distributing ultra-high resolution Single-Link or Dual-Link DVI signals over cable lengths up to 500 meters (1,640 ft.) while maintaining flawless image quality. On the source side, an optical transmitter module converts DVI input signals into light pulses for transmission over 7 strands of multi-mode fiber optic cable. On the display side, an optical receiver module converts the light pulses back to a DVI signal for display on a monitor or projector. A programmable memory chip provides EDID support for any display without the need for a copper cable. The unit also provides a DDC link that supports live EDID / HDCP communications using a standard CAT5 cable. These features make the DVI-7320 the ideal solution for critical display applications that require flawless DVI signal quality over very long cable runs.

**FEATURES**

- Supports HDTV resolutions up to 1080p
- Supports PC resolutions up to 1600x1200 and 1920x1200
- Supports digital bit-rates up to 1.65 Gbit/sec.
- Single optical fiber transmission is immune to environmental signal noise.
- Low RFI/EMI profile for sensitive application

- Built-in programmable EDID memory - eliminates the need for DDC connection
- Transmitter unit can be powered by DVI source or by optional +5VDC external power supply.
- Receiver unit is powered by +5VDC external power supply.
- Single, detachable optical cable greatly simplifies installation and maintenance.

**SPECIFICATIONS**

CONNECTIONS	
DVI Input/DVI Output	1x 25-pin Male DVI-D connector
Optical	1x SC fiber optic connector
Power	1x 3.5mm jack
RESOLUTION	
PC	Supports all Single-Link resolutions up to 1600x1200 and 1920x1200
HDTV	Supports HDTV resolutions up to 1080p and 2048x1080
BANDWIDTH	
Pixel Rates	Supports pixel clock rates up to 165 MHz
Bit Rates	Supports digital signal bit rates up to 1.65 Gbit/sec
OPTICAL	
Optical Transmitter	Tx Module: Quad VCSEL Lasers (CWDM), Class 1 laser product
Optical Receiver	Rx Module: Quad PIN Photo Diodes (CWDM)
Fiber Cable	50/125µm LC multi-Mode OM3 Fiber with 1x SC connector per module
CABLE CONSTRUCTION	
Custom Lengths	Available on request, maximum length = 500 meters/1640 ft.
Cable Jacket	OFNP, Plenum Rated PVC Jacket (blue)
Cable Outside Diameter	2.9 mm
DDC SUPPORT	
EDID Support	An EDID memory built into the Tx module can learn and store the display's EDID info, thereby eliminating the need for a DDC connection using copper cables.
HDCP Support	HDCP communications are <b>NOT</b> supported!

POWER	
Optical Transmitter	Tx module requires at least 180 ma of DC current from pin 14 of DVI (source) connector. Optional external power supply may be used if needed.
Optical Receiver	Must be powered using the supplied external power supply
External Power Supply	Input: 100-240VAC, 50-60Hz 0.2A/ Output: +5VDC @ 0.5A
Power Consumption	Maximum: 1.9 watts (for both Tx and Rx units)
MECHANICAL	
Construction	High impact plastic enclosure with metallic finish
Dimensions (L x W x H)	2.61" x 1.57" x 0.59" (66.4 mm x 40.0 mm x 15.0 mm)
Weight	Net Weight: 0.16 lb. (72 g) Shipping Weight: 0.82 lb. (372 g)
ENVIRONMENTAL	
Operation	+32° to +122° F (0° to +70° C)
Storage	-4° to +158° F (-20° to +70° C)
Relative Humidity	10% - 80%
ACCESSORIES INCLUDED	
This product is RoHS and CE compliant	

DVI-7315	
PART NR.	PACK. UNIT
DVI-7315	1

**FEATURES**

- Supports HDTV resolutions up to 2048x1080 pixels
- Supports PC resolutions up to 3840x2400 pixels
- Supports digital bit-rates up to 3.3 Gbps
- Optical fiber transmission is immune to environmental signal noise.
- Low RFI/EMI profile for sensitive applications

- EDID supported via direct DDC connection or by built-in EDID memory
- Transmitter unit can be powered by DVI source or by optional +5VDC external power supply.
- Receiver unit is powered by +5VDC external power supply.
- Detachable optical cables greatly simplify installation and maintenance.

**SPECIFICATIONS**

MODEL NUMBER	
DVI-7320	Dual-Link DVI Fiber Optic Extender
CONNECTIONS	
DVI Input/DVI Output	29-pin female DVI connectors
Optical	7x LC type fiber optic connectors (R1, G1, B1, R2, G2, B2, Clock)
DDC	RJ-45 JACK
Power	3.5mm jack
RESOLUTION	
PC	Supports all Single-Link DVI resolutions up to 1600x1200 and 1920x1200 Supports all Dual-Link DVI resolutions up to 3840x2400 (WQUXGA displays)
HDTV	Supports HDTV resolutions up to 1080p and 2048x1080
BANDWIDTH	
Pixel Rates	Supports pixel clock rates up to 330 MHz
Bit Rates	Supports digital signal bit rates up to 3.30 Gbps
OPTICAL	
Optical Transmitter	Tx Module: VCSEL Lasers, Class 1 laser product
Optical Receiver	Rx Module: PIN Photo Diodes
Fiber Cable Type	50/125µm multi-mode optical fiber with 7x LC connectors per module
DVI Gear Fiber Cable	OFNP, Plenum Rated PVC Jacket, Diameter 5.0 mm (data available upon request)
Cable Length	Real EDID Mode: Maximum 100 m/328 ft. EDID Emulation Mode: Maximum 500 m/1640 ft.

DDC SUPPORT	
EDID Support	An EDID memory built into the Tx module can learn and store the display's EDID info, thereby eliminating the need for a DDC connection using copper cables.
HDCP Support	HDCP communications are supported using optional DDC link over a CAT5 cable.
POWER	
OPTICAL TRANSMITTER	Tx module requires at least 300 ma of DC current from pin 14 of DVI (source) connector. Optional external power supply may be used if needed.
Optical Receiver	Must be powered using the supplied external power supply
External Power Supply	Input: 100-240VAC, 50-60Hz 0.5A/ Output: +5VDC @ 2.0A
Power Consumption	Maximum: 3.0 watts (for both Tx and Rx units)
MECHANICAL	
Construction	Rugged metal enclosure with jet black finish
Dimensions (L x W x H)	7.05" x 3.56" x 1.31" (179.1 mm x 90.3 mm x 33.3 mm)
Weight	Tx Unit: 1.02 lb. (462 g) Rx Unit: 1.02 lb. (462 g)
ENVIRONMENTAL	
Operation	+32° to +122° F (+0° to +50° C)
Storage	-4° to +158° F (-20° to +70° C)
Relative Humidity	10% - 80%
ACCESSORIES INCLUDED	
<b>INCLUDED:</b> 1x AC Power Adapter, 1x User Guide <b>OPTIONAL:</b> Wall Mount Bracket (DVI-7320-WM)	

DVI-7320	
PART NR.	PACK. UNIT
DVI-7320	1

# Video Cables

## Video Analogue Cables: Cable Tasker RG59 Flex

Connectors: Lumberg 2x BNC



BNC +Tule

BNC +Tule



### APPLICATIONS

Flexible coaxial cable with stranded conductor for solder type connectors and for videofrequency or digital audio installations.CEI 20-22/II\*.

### CHARACTERISTICS

**Conductors:** stranded in O.F.C. red copper  
**Insulation:** PE  
**Shield:** Braided covering 90% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:** Black, White, Red, Green, Blue

## Video Analogue Cables: Cable Tasker RG59 Flex

Connectors: Tasker 2x SP63



SP63

SP63



### APPLICATIONS

Flexible coaxial cable with stranded conductor for solder type connectors and for videofrequency or digital audio installations.

### CHARACTERISTICS

**Conductor:** stranded in O.F.C. red copper  
**Insulation:** PE  
**Shield:** Braided covering 90% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:** Black, White, Red, Green, Blue

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
RG 59 FLEX	1	1 X 75 Ω	7 X 0,20	3,7		6,1	100	B	4,5


ATTENUATION DB/100MT						
50	100	200	400	800	1000	
MHZ	MHZ	MHZ	MHZ	MHZ	MHZ	MHZ
8,1	11,7	17,1	24,7	36,1	40,8	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE PROPAGATION
Ω/Km ± 5%	PF/mt	PF/mt	%	AC-V	V	°C
75		67	66	75	2000	-15/+70

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type B	Kg. 4,5
RG 59 FLEX	1	1 X 75 Ω (0,22 MM)	7 x 0,20	3,7	6,1	100	Type B	4,5

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	%	AC-V	°C
75		67	66	2000	-15/+70

BNBN59F BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
BNBN59F3	BLACK	3 M	1
BNBN59F6	BLACK	6 M	1
BNBN59F9	BLACK	9 M	1
BNBN59F12	BLACK	12 M	1
BNBN59F24	BLACK	24 M	1



BNBN59F WHITE			
PART NR.	COLOR	LENGTH	PACK. UNIT
BNBN59F3	WHITE	3 M	1
BNBN59F6	WHITE	6 M	1
BNBN59F9	WHITE	9 M	1
BNBN59F12	WHITE	12 M	1
BNBN59F24	WHITE	24 M	1



BNBN59F RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
BNBN59F3	RED	3 M	1
BNBN59F6	RED	6 M	1
BNBN59F9	RED	9 M	1
BNBN59F12	RED	12 M	1
BNBN59F24	RED	24 M	1



BNBN59F GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
BNBN59F3	GREEN	3 M	1
BNBN59F6	GREEN	6 M	1
BNBN59F9	GREEN	9 M	1
BNBN59F12	GREEN	12 M	1
BNBN59F24	GREEN	24 M	1



BNBN59F BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
BNBN59F3	BLUE	3 M	1
BNBN59F6	BLUE	6 M	1
BNBN59F9	BLUE	9 M	1
BNBN59F12	BLUE	12 M	1
BNBN59F24	BLUE	24 M	1



DARG59FL BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DARG59FL	BLACK	0,5 M	1
DARG59FL	BLACK	1,0 M	1
DARG59FL	BLACK	2,0 M	1
DRRG59FL	BLACK	3,0 M	1
DRRG59FL	BLACK	5,0 M	1



DARG59FL BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
DARG59FL	BLUE	0,5 M	1
DARG59FL	BLUE	1,0 M	1
DARG59FL	BLUE	2,0 M	1
DRRG59FL	BLUE	3,0 M	1
DRRG59FL	BLUE	5,0 M	1



DARG59FL WHITE			
PART NR.	COLOR	LENGTH	PACK. UNIT
DARG59FL	WHITE	0,5 M	1
DARG59FL	WHITE	1,0 M	1
DARG59FL	WHITE	2,0 M	1
DRRG59FL	WHITE	3,0 M	1
DRRG59FL	WHITE	5,0 M	1



DARG59FL YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
DARG59FL	YELLOW	0,5 M	1
DARG59FL	YELLOW	1,0 M	1
DARG59FL	YELLOW	2,0 M	1
DRRG59FL	YELLOW	3,0 M	1
DRRG59FL	YELLOW	5,0 M	1



DARG59FL RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
DARG59FL	RED	0,5 M	1
DARG59FL	RED	1,0 M	1
DARG59FL	RED	2,0 M	1
DRRG59FL	RED	3,0 M	1
DRRG59FL	RED	5,0 M	1



# Video Cables

## Video Analogue Cables: Cable Tasker RG59 Flex

Connectors: Lumberg 2x BNC



### APPLICATIONS

Flexible coaxial cable with stranded conductor for solder type connectors and for videofrequency or digital audio installations.

### CHARACTERISTICS

**Conductor:** stranded in O.F.C. red copper  
**PE Shield:** Braided covering 90% O.F.C. red copper  
**Sheath colours:** Black, White, Red, Green, Blue

BNC Lumberg

## Video Analogue Cables: Cable Tasker RG59 Flex

Connectors: Neutrik 2x BNC



### APPLICATIONS

Flexible coaxial cable with stranded conductor for solder type connectors and for videofrequency or digital audio installations.CEI 20-22/II\*.

### CHARACTERISTICS

**Conductors:** stranded in O.F.C. red copper  
**Insulation:** PE  
**Shield:** Braided covering 90% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:** Black, White, Red, Green, Blue

BNC (Rear twist)

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
RG 59 FLEX	1	1 X 75 Ω (0,22 MM)	7 x 0,20	3,7	6,1	mt. 100	Type B	Kg. 4,5

CONDUCTOR	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE AC-V	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	PF/mt	%	AC-V	°C
75		67	66	2000	-15/+70

DARG59LU BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
DARG59LU	BLACK	0.5 M	1
DARG59LU	BLACK	1.0 M	1
DARG59LU	BLACK	2.0 M	1
DARG59LU	BLACK	3.0 M	1
DARG59LU	BLACK	5.0 M	1

DARG59FL BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
DARG59LU	BLUE	0.5 M	1
DARG59LU	BLUE	1.0 M	1
DARG59LU	BLUE	2.0 M	1
DARG59LU	BLUE	3.0 M	1
DARG59LU	BLUE	5.0 M	1

DARG59FL WHITE			
PART NR.	COLOR	LENGTH	PACK. UNIT
DARG59LU	WHITE	0.5 M	1
DARG59LU	WHITE	1.0 M	1
DARG59LU	WHITE	2.0 M	1
DARG59LU	WHITE	3.0 M	1
DARG59LU	WHITE	5.0 M	1

DARG59FL YELLOW			
PART NR.	COLOR	LENGTH	PACK. UNIT
DARG59LU	YELLOW	0.5 M	1
DARG59LU	YELLOW	1.0 M	1
DARG59LU	YELLOW	2.0 M	1
DARG59LU	YELLOW	3.0 M	1
DARG59LU	YELLOW	5.0 M	1

DARG59FL RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
DARG59LU	RED	0.5 M	1
DARG59LU	RED	1.0 M	1
DARG59LU	RED	2.0 M	1
DARG59LU	RED	3.0 M	1
DARG59LU	RED	5.0 M	1

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
RG 59 FLEX	1	1 X 75 Ω	7 X 0,20	3,7		6,1	100	B	4,5

ATTENUATION DB/100MT					
50 MHZ	100 MHZ	200 MHZ	400 MHZ	800 MHZ	1000 MHZ
8,1	11,7	17,1	24,7	36,1	40,8

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION OF COAX	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE PROPAGATION
Ω/Km ± 5%	PF/mt	PF/mt	%	AC-V	V	°C
75		67	66	75	2000	-15/+70

NRRT59F BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NRRT59F3	BLACK	3 M	1
NRRT59F6	BLACK	6 M	1
NRRT59F9	BLACK	9 M	1
NRRT59F12	BLACK	12 M	1
NRRT59F24	BLACK	24 M	1

NRRT59F WHITE			
PART NR.	COLOR	LENGTH	PACK. UNIT
NRRT59F3	WHITE	3 M	1
NRRT59F6	WHITE	6 M	1
NRRT59F9	WHITE	9 M	1
NRRT59F12	WHITE	12 M	1
NRRT59F24	WHITE	24 M	1

NRRT59F RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
NRRT59F3	RED	3 M	1
NRRT59F6	RED	6 M	1
NRRT59F9	RED	9 M	1
NRRT59F12	RED	12 M	1
NRRT59F24	RED	24 M	1

NRRT59F GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
NRRT59F3	GREEN	3 M	1
NRRT59F6	GREEN	6 M	1
NRRT59F9	GREEN	9 M	1
NRRT59F12	GREEN	12 M	1
NRRT59F24	GREEN	24 M	1

NRRT59F BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
NRRT59F3	BLUE	3 M	1
NRRT59F6	BLUE	6 M	1
NRRT59F9	BLUE	9 M	1
NRRT59F12	BLUE	12 M	1
NRRT59F24	BLUE	24 M	1

# Video Cables

## Video Analogue Cables: Cable Tasker RG59 Flex

Connectors: Neutrik 2x BNC – Cable Drum Schill



### APPLICATIONS

Flexible coaxial cable with stranded conductor for solder type connectors and for videofrequency or digital audio installations. CEI 20-22/II°.


### CHARACTERISTICS

**Conductors:** stranded in O.F.C. red copper  
**Insulation:** PE  
**Shield:** Braided covering 90% O.F.C. red copper  
**Sheath:** PVC  
**Sheath colours:** Black, White, Red, Green, Blue

BNC (Rear Twist) BNC (Rear Twist)

## Video Cables: Cable Tasker TSK1077

Connectors: Neutrik 2x BNC

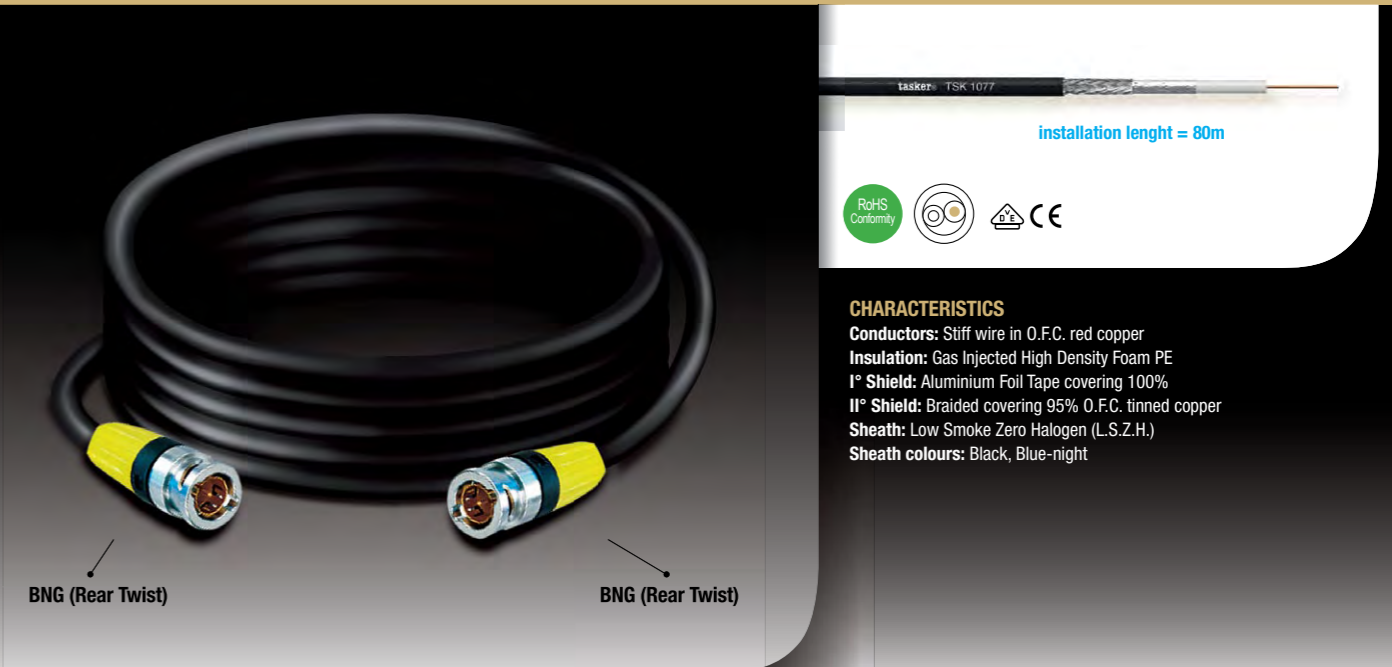

installation lenght = 80m

### CHARACTERISTICS

**Conductors:** Stiff wire in O.F.C. red copper  
**Insulation:** Gas Injected High Density Foam PE  
**I° Shield:** Aluminium Foil Tape covering 100%  
**II° Shield:** Braided covering 95% O.F.C. tinned copper  
**Sheath:** Low Smoke Zero Halogen (L.S.Z.H.)  
**Sheath colours:** Black, Blue-night

BNG (Rear Twist) BNG (Rear Twist)

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
RG 59 FLEX	1	1 X 75 Ω	7 X 0,20	3,7		6,1	100	B	4,5

ATTENUATION DB/100MT						
50	100	200	400	800	1000	
MHZ	MHZ	MHZ	MHZ	MHZ	MHZ	MHZ
8,1	11,7	17,1	24,7	36,1	40,8	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE PROPAGATION
Ω/Km ± 5%	PF/mt	PF/mt	%	AC-V	V	°C
75		67	66	75	2000	-15/+70

SHRR59F BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SHRR59F1	BLACK	50 M	1
SHRR59F2	BLACK	100 M	1



### APPLICATIONS

Coaxial cable with smaller external diameter for HDTV (High Definition TV) and HD SDI (High Definition Serial Digital Interface) installations. The velocity of transmission of the SDTV-SDI Digital Video Signal is of 270Mbps while the one of a HDTV-SDI High Definition Digital Video Signal is of 1,485 Gbps. The HDTV technology comprehends two formats that differ either for resolution or for image scanning conditions.

This coaxial cable allows the transmission of HDTV signal in the HDV (720p) resolution 1280x720 format with progressive scanning or in the HD (1080i) resolution 1920x1080 format with interlaced scanning at highest resolution and high frequency on the maximum distances of 80mt. The high performance level of this cable is possible thanks to the high quality of the material used and to the highly skilled produc-

tive processes. The cable is suitable to BNC tasker® SP 75 ed SP 76 connectors and to RCA tasker® SP 63 and other crimping type N connector with 75 Ω impedance. Due to his dimensions can be applied in the Broadcast and multi-coaxial installations of HDTV video direction and of HD SDI video interfaces in the recording and duplication cinematographic studios.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK1077	1	23 AWG (0,25 MM²)	1 X 0,584	2,6	4,0	14,7	100	B	28,0

ATTENUATION DB/100MT						
1	10	100	1	2	3	4,5
MHZ	MHZ	MHZ	GHZ	GHZ	GHZ	GHZ
1,31	3,31	11,80	38,07	54,48	69,47	88,89

CONDUCTOR RESISTANCE	NOMINAL DELAY	CAPACITY CORE/CORE	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	OPERATIVE PROPAGATION
Ω/Km ± 5%	ns/m.	PF/mt	%	Ω ± 3%	°C
66	4,0	53,6	82	75	-30 / +70

HDS77 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HDS771	BLACK	1 M	1
HDS772	BLACK	2 M	1
HDS773	BLACK	3 M	1
HDS776	BLACK	6 M	1
HDS779	BLACK	9 M	1
HDS7712	BLACK	12 M	1



# Video Cables

Coax Cables: Cable Tasker TSK1078

Connectors: Neutrik 2x BNC



**CHARACTERISTICS**

**Conductors:** Stiff wire in O.F.C. red copper  
**Insulation:** Gas Injected High Density Foam PE  
**I° Shield:** Aluminium Foil Tape covering 100%  
**II° Shield:** Braided covering 95% O.F.C. tinned copper  
**Sheath:** Low Smoke Zero Halogen (L.S.Z.H.)  
**Sheath colours:** Black, Blue-night

Video Cables: Cable Tasker TSK1078 PUR

Connectors: Neutrik 2x BNC



**CHARACTERISTICS**

**Conductors:** Stiff wire in O.F.C. red copper  
**Insulation:** Gas Injected High Density Foam PE  
**I° Shield:** Aluminium Foil Tape covering 100%  
**II° Shield:** Braided covering 95% O.F.C. tinned copper  
**Sheath:** Low Smoke Zero Halogen (L.S.Z.H.)  
**Sheath colours:** Black, Blue-night

**APPLICATIONS**

Coaxial cable for HDTV (High Definition TV) and HD SDI (High Definition Serial Digital Interface) installations. The velocity of transmission of the SDTV-SDI Digital Video Signal is of 270Mbps while the one of a HDTV-SDI High Definition Digital Video Signal is of 1,485 Gbps. The HDTV technology comprehends two formats that differ either for resolution or for image scanning conditions. This coaxial cable allows the

transmission of HDTV signal in the HDV (720p) resolution 1280x720 format with progressive scanning or in the HD (1080i) resolution 1920x1080 format with interlaced scanning at highest resolution and high frequency on the maximum distances of 120mt. The high performance level of this cable is possible thanks to the high quality of the material used and to the highly skilled productive processes. The cable is

suitable to BNC tasker® SP 53 ed SP 76 connectors and to RCA tasker® SP 63 and other crimping type N connector with 75 Ω impedance. Due to his dimensions can be applied in the Broadcast and multi-coaxial installations of HDTV video direction and of HD SDI video interfaces in the recording and duplication cinematographic studios.

**APPLICATIONS**

Coaxial cable for HDTV (High Definition TV) and HD SDI (High Definition Serial Digital Interface) installations. The velocity of transmission of the SDTV-SDI Digital Video Signal is of 270Mbps while the one of a HDTV-SDI High Definition Digital Video Signal is of 1,485 Gbps. The HDTV technology comprehends two formats that differ either for resolution or for image scanning conditions. This coaxial cable allows the

transmission of HDTV signal in the HDV (720p) resolution 1280x720 format with progressive scanning or in the HD (1080i) resolution 1920x1080 format with interlaced scanning at highest resolution and high frequency on the maximum distances of 120mt. The high performance level of this cable is possible thanks to the high quality of the material used and to the highly skilled productive processes. The cable is

suitable to BNC tasker® SP 53 ed SP 76 connectors and to RCA tasker® SP 63 and other crimping type N connector with 75 Ω impedance. Due to his dimensions can be applied in the Broadcast and multi-coaxial installations of HDTV video direction and of HD SDI video interfaces in the recording and duplication cinematographic studios.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm²	mm.	Ø mm.	mm.	mt.	Type	Kg.
TSK1078	1	20 AWG (0,52 MM²)	1 X 0,813	3,7	14,7	100 300	B	

CONDUCTOR RESISTANCE	NOMINAL DELAY	CAPACITY CORE/CORE	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	OPERATIVE PROPAGATION
Ω/Km ± 5%	ns/m.	PF/mt	%	Ω ± 3%	°C
33	4,0	53,5	83	75	-30/+75

HSDR78 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HSDR781	BLACK	1 M	1
HSDR782	BLACK	2 M	1
HSDR783	BLACK	3 M	1
HSDR786	BLACK	6 M	1
HSDR789	BLACK	9 M	1
HSDR7812	BLACK	12 M	1
HSDR7824	BLACK	24 M	1
HSDR7848	BLACK	48 M	1
HSDR78100	BLACK	100 M	1



ATTENUATION DB/100MT						
1	10	100	1	2	3	4,5
MHZ	MHZ	MHZ	GHZ	GHZ	GHZ	GHZ
0,78	2,03	7,31	24,60	36,74	50,11	67,64

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm²	mm.	Ø mm.	mm.	mt.	Type	Kg.
TSK1078	1	20 AWG (0,52 MM²)	1 X 0,813	3,7	14,7	100 300	B	

CONDUCTOR RESISTANCE	NOMINAL DELAY	CAPACITY CORE/CORE	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	OPERATIVE PROPAGATION
Ω/Km ± 5%	ns/m.	PF/mt	%	Ω ± 3%	°C
33	4,0	53,5	83	75	-30/+75

HDSR78 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HDSR781	BLACK	1 M	1
HDSR782	BLACK	2 M	1
HDSR783	BLACK	3 M	1
HDSR786	BLACK	6 M	1
HDSR789	BLACK	9 M	1
HDSR7812	BLACK	12 M	1
HDSR7824	BLACK	24 M	1
HDSR7848	BLACK	48 M	1
HDSR78100	BLACK	100 M	1



# Video Cables

## Video Cables: Cable Tasker TSK1079

Connectors: Neutrik 2x BNC



### CHARACTERISTICS

**Conductors:** Stiff wire in O.F.C. red copper  
**Insulation:** Gas Injected High Density Foam PE  
**I° Shield:** Aluminium Foil Tape covering 100%  
**II° Shield:** Braided covering 95% O.F.C. tinned copper  
**Sheath:** Low Smoke Zero Halogen (L.S.Z.H.)  
**Sheath colours:** Black, Blue-night

## Video Cables: Cable Tasker TSK1080

Connectors: Neutrik 2x BNC



### CHARACTERISTICS

**Conductors:** Stiff wire in O.F.C. red copper  
**Insulation:** Gas Injected High Density Foam PE  
**I° Shield:** Aluminium Foil Tape covering 100%  
**II° Shield:** Braided covering 95% O.F.C. tinned copper  
**Sheath:** Low Smoke Zero Halogen (L.S.Z.H.)  
**Sheath colours:** Black, Blue-night

### APPLICATIONS

Coaxial cables for HDTV (High Definition TV) and HD SDI (High Definition Serial Digital Interface) installations. The velocity of transmission of the SDTV-SDI Digital Video Signal is of 270Mbps while the one of a HDTV-SDI High Definition Digital Video Signal is of 1,485 Gbps. The HDTV technology comprehends two formats that differ either for resolution or for image scanning conditions. This coaxial cable allows the transmission of HDTV signal in the HDV (720p) resolution

1280x720 format with progressive scanning or in the HD (1080i) resolution 1920x1080 format with interlaced scanning at highest resolution and high frequency on the maximum distances of 140mt. The high performance level and in particular the low attenuation at the high frequencies on long distances of this cable depends either to the high quality of the material used and to the highly skilled productive processes. The cable is suitable to BNC tasker® SP 53 and

other crimping type BNC or N connector with 75 Ω impedance. Professional cable that can be applied in the Broadcast and multi-coaxial installations of HDTV video direction and of HD SDI video interfaces in the recording and duplication cinematographic studios, room conference, airports, buildings and entertainment and sporting structures.

### APPLICATIONS

Coaxial cables for HDTV (High Definition TV) and HD SDI (High Definition Serial Digital Interface) installations. The velocity of transmission of the SDTV-SDI Digital Video Signal is of 270Mbps while the one of a HDTV-SDI High Definition Digital Video Signal is of 1,485 Gbps. The HDTV technology comprehends two formats that differ either for resolution or for image scanning conditions. This coaxial cable allows the transmission of HDTV signal in the HDV (720p) resolution 1280x720

format with progressive scanning or in the HD (1080i) resolution 1920x1080 format with interlaced scanning at highest resolution and high frequency on the maximum distances of 150/200mt. The high performance level and in particular the low attenuation at the high frequencies on long distances of this cable depends either to dimensions and to the high quality of the material used and to the highly skilled productive processes. The cable is suitable to crimping type BNC or N

connector with 75 Ω impedance. Professional cable that can be applied in the Broadcast and multi-coaxial installations of HDTV video direction and of HD SDI video interfaces on the external video mobile unit, in the recording and duplication cinematographic studios, room conference, airports, theatres and concerts and other events, public buildings, entertainment and sporting structures.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
TSK1079	1	18 AWG (0,81 MM²)	1 X 1,016	4,6	7,0	100 300	B	

ATTENUATION DB/100MT						
1	10	100	1	2	3	4,5
MHZ	MHZ	MHZ	GHZ	GHZ	GHZ	GHZ
0,95	2,03	6,71	22,50	33,98	44,96	52,79

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
TSK1080	1	14 AWG (2,07 MM²)	1 X 1,626	7,1	10,2	100 300	B	

ATTENUATION DB/100MT						
1	10	100	1	2	3	4,5
MHZ	MHZ	MHZ	GHZ	GHZ	GHZ	GHZ
0,62	1,39	4,73	16,50	26,53	34,77	43,98

CONDUCTOR RESISTANCE	NOMINAL DELAY	CAPACITY CORE/CORE	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	OPERATIVE PROPAGATION
Ω/Km ± 5%	ns/m.	PF/mt	%	Ω ± 3%	°C
21	4,1	53,2	82	75	-30/+75

CONDUCTOR RESISTANCE	NOMINAL DELAY	CAPACITY CORE/CORE	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	OPERATIVE PROPAGATION
Ω/Km ± 5%	ns/m.	PF/mt	%	Ω ± 3%	°C
8	4,0	52,5	85	75	-30/+75

HDSR79 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HDSR791	BLACK	1 M	1
HDSR792	BLACK	2 M	1
HDSR793	BLACK	3 M	1
HDSR796	BLACK	6 M	1
HDSR799	BLACK	9 M	1
HDSR7912	BLACK	12 M	1
HDSR7924	BLACK	24 M	1
HDSR7948	BLACK	48 M	1
HDSR79100	BLACK	100 M	1
HDSR79140	BLACK	140 M	1



HDSR8 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HDSR81	BLACK	1 M	1
HDSR810	BLACK	10 M	1
HDSR820	BLACK	20 M	1
HDSR830	BLACK	30 M	1
HDSR840	BLACK	40 M	1
HDSR850	BLACK	50 M	1
HDSR870	BLACK	70 M	1
HDSR8100	BLACK	100 M	1
HDSR8150	BLACK	150 M	1
HDSR8200	BLACK	200 M	1



# Video Cables

## Video Cables: Cable Tasker TSK1080 PUR

Connectors: Neutrik 2x BNC



### CHARACTERISTICS

**Conductors:** Stiff wire in O.F.C. red copper  
**Insulation:** Gas Injected High Density Foam PE  
**I° Shield:** Aluminium Foil Tape covering 100%  
**II° Shield:** Braided covering 95% O.F.C. tinned copper  
**Sheath:** Low Smoke Zero Halogen (L.S.Z.H.)  
**Sheath colours:** Black, Blue-night

## Video Cables: Cable Tasker T42 PUR

Connectors: Neutrik 2x BNC – Cable Drum Schill



### CHARACTERISTICS

**Conductor:** stranded in O.F.C. red copper  
**Insulation:** Gas Injected High Density Foam PE  
**I° Shield:** Braided covering 95% O.F.C. tinned copper  
**II° Shield:** Braided covering 95% O.F.C. tinned copper  
**Sheath:** PUR – Flame Retardant  
**Sheath colours:** Green (RAL6026)

### APPLICATIONS

Coaxial cables for HDTV (High Definition TV) and HD SDI (High Definition Serial Digital Interface) installations. The velocity of transmission of the SDTV-SDI Digital Video Signal is of 270Mbps while the one of a HDTV-SDI High Definition Digital Video Signal is of 1,485 Gbps. The HDTV technology comprehends two formats that differ either for resolution or for image scanning conditions. This coaxial cable allows the transmission of HDTV signal in the HDV (720p) resolution 1280x720

format with progressive scanning or in the HD (1080i) resolution 1920x1080 format with interlaced scanning at highest resolution and high frequency on the maximum distances of 150/200mt. The high performance level and in particular the low attenuation at the high frequencies on long distances of this cable depends either to dimensions and to the high quality of the material used and to the highly skilled productive processes. The cable is suitable to crimping type BNC or N

connector with 75 Ω impedance. Professional cable that can be applied in the Broadcast and multi-coaxial installations of HDTV video direction and of HD SDI video interfaces on the external video mobile unit, in the recording and duplication cinematographic studios, room conference, airports, theatres and concerts and other events, public buildings, entertainment and sporting structures.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
TSK1080	1	14 AWG (2,07 MM²)	1 X 1,626	7,1	10,2	100 300	B	

ATTENUATION DB/100MT							
1	10	100	1	2	3	4,5	
MHZ	MHZ	MHZ	GHZ	GHZ	GHZ	GHZ	GHZ
0,62	1,39	4,73	16,50	26,53	34,77	43,98	

CONDUCTOR RESISTANCE	NOMINAL DELAY	CAPACITY CORE/CORE	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	OPERATIVE PROPAGATION
Ω/Km ± 5%	ns/m.	PF/mt	%	Ω ± 3%	°C
8	4,0	52,5	85	75	-30/+75

HDS DIP8 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HDS DIP81	BLACK	1 M	1
HDS DIP810	BLACK	10 M	1
HDS DIP820	BLACK	20 M	1
HDS DIP830	BLACK	30 M	1
HDS DIP840	BLACK	40 M	1
HDS DIP850	BLACK	50 M	1
HDS DIP870	BLACK	70 M	1
HDS DIP8100	BLACK	100 M	1
HDS DIP8150	BLACK	150 M	1
HDS DIP8200	BLACK	200 M	1



### APPLICATIONS

Extra-flexible high performances coaxial cable for Outdoor HDTV (High Definition TV) and HD SDI (High Definition Serial Digital Interface) assemblies and installations as for example connection of Full HD Videowalls, Mixers and Digital Video Directions during outdoor events. The cable can be also used for Broadcast and Multi-coax installations of HDTV Video Directions and HD SDI video interfaces in TV, recording and/or cinematographic duplication studios. The velocity of transmission of the SDTV-SDI Digital Video Signal is of 270Mbps while the one of a HDTVSDI High Definition Digital Video Signal is of 1,485 Gbps. The HDTV technology

comprehends two formats that differ either for resolution or for image scanning conditions. This coaxial cable allows the transmission of HDTV signal in the HDV (720p) resolution 1280x720 format with progressive scanning or in the HD (1080i) resolution 1920x1080 format with interlaced scanning at highest resolution and high frequency on the maximum distances of 100mt. The high performance level of this cable is possible thanks to the high quality of the material used and to the highly skilled productive processes. The inner multi-wire conductor and the elastic insulations give this cable the possibility of supporting the mobile

laying but not cyclic and/or stressful handlings. The cable is suitable for HD 3 GHz BNC and other N connectors, both crimping and soldering type, having a 75 Ω impedance and HD video transmission ability. The Polyurethan sheath makes the cable suitable for external laying and resistant to atmospheric agents, UV rays and friction, ensuring a long lasting life to the cable. This cable does not produce Gases or Halogen Smokes in case of combustion, buildings, entertainment and sporting structures.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
						mt.	Type	Kg.
T42	1	18 AWG (0,88 MM²)	1 X 1,626	7,1	10,2	100 300	B	

ATTENUATION DB/100MT							
1	10	100	1	2	3	4,5	
MHZ	MHZ	MHZ	GHZ	GHZ	GHZ	GHZ	GHZ
0,95	2,03	6,71	22,50	33,98	44,96	52,79	

CONDUCTOR RESISTANCE	NOMINAL DELAY	CAPACITY CORE/CORE	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	OPERATIVE PROPAGATION
Ω/Km ± 5%	ns/m.	PF/mt	%	Ω ± 3%	°C
21	4,1	53,0	82	75	-30/+75

HDS DIP8 GREEN			
PART NR.	COLOR	LENGTH	PACK. UNIT
HDS DIP850	GREEN	50 M	1
HDS DIP8100	GREEN	100 M	1



# Video Cables

## Video Cables: Cable Tasker C139

Connectors: Tasker 2x SP54 Mini Din



### APPLICATIONS

Special cable composed of 2 mini-coaxial video cables for S-VHS professional systems. Flexible cable for fixed and mobile installation with big external diameter, suitable to connect high quality connectors as for example: tasker® SP 54 S-VHS Mini-DIN 4 pin.

### CHARACTERISTICS

**Conductors:** stranded in O.F.C. red copper  
**Insulations:** PEE  
**Shields:** Spiral covering 100% O.F.C. tinned copper  
**Inner sheaths:** PVC  
**Sheath colours:** Red, White  
**Total sheath:** PVC  
**Sheath colour:** Blue-night

## Video Cables: Cable Tasker C139

Connectors: Neutrik 2x BNC – Tasker SP 54 Mini Din



### APPLICATIONS

Special cable composed of 2 mini-coaxial video cables for S-VHS professional systems. Flexible cable for fixed and mobile installation with big external diameter, suitable to connect high quality connectors as for example: tasker® SP 54 S-VHS Mini-DIN 4 pin.

### CHARACTERISTICS

**Conductors:** stranded in O.F.C. red copper  
**Insulations:** PEE  
**Shields:** Spiral covering 100% O.F.C. tinned copper  
**Inner sheaths:** PVC  
**Sheath colours:** Red, White Total sheath:  
**PVC Sheath colour:** Blue-night

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTER-NAL INNER SHEATH	EXTER-NAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mL	Type	Kg.
		mm <sup>2</sup>	mm.	mm.	Ø mm.	mm.			
C139	2	2 X 75 Ω (0,08 MM <sup>2</sup> )	10 X 0,10	1,5	2,8	7,5	100	B	12,0

ATTENUATION DB/100MT						
50	100	200	400	800	1000	
MHZ	MHZ	MHZ	MHZ	MHZ	MHZ	MHZ
19,5	28,5	41,7	60,2	87,3	103,0	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/CORE	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE PROPAGATION
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	V	°C
210		67	66	75	49	-15/+70

SVHS139S BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
SVHS139S1	BLUE NIGHT	1 M	1
SVHS139S2	BLUE NIGHT	2 M	1
SVHS139S3	BLUE NIGHT	3 M	1
SVHS139S5	BLUE NIGHT	5 M	1
SVHS139S10	BLUE NIGHT	10 M	1
SVHS139S20	BLUE NIGHT	20 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTER-NAL CORE	EXTER-NAL INNER SHEATH	EXTER-NAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mL	Type	Kg.
		mm <sup>2</sup>	mm.	mm.	Ø mm.	mm.			
C139	2	2 X 75 Ω (0,08 MM <sup>2</sup> )	10 X 0,10	1,5	2,8	7,5	100	B	12,0

ATTENUATION DB/100MT						
50	100	200	400	800	1000	
MHZ	MHZ	MHZ	MHZ	MHZ	MHZ	MHZ
19,5	28,5	41,7	60,2	87,3	103,0	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/CORE	VELOCITY OF PROGAGATION OF COAX	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE PROPAGATION
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	V	°C
210		67	66	75	49	-15/+70

SPBNC54 BLUE NIGHT			
PART NR.	COLOR	LENGTH	PACK. UNIT
SPBNC541	BLUE NIGHT	1 M	1
SPBNC542	BLUE NIGHT	2 M	1
SPBNC543	BLUE NIGHT	3 M	1
SPBNC544	BLUE NIGHT	4 M	1
SPBNC545	BLUE NIGHT	5 M	1
SPBNC510	BLUE NIGHT	10 M	1
SPBNC520	BLUE NIGHT	20 M	1



# Video Cables

## HD Camera Cables: Furukawa ARIB standard

Connectors: Lemo FUW + GMF – Lemo PUW + GMP – Cable Drum Schill



### APPLICATIONS

**Multipurpose cable: 2SM-9.2-37.5**

This cable is suitable for wide applications such as fixed installation in facilities, relay cable, handy camera cable and patch cable.

**Large-camera cable in studio: 2SM-16-37.5**

This is a cable for large-sized TV cameras in studios. The cable has a larger outside diameter due to the additional sheath on a multipurpose cable in order not to be jammed between the camera pedestal dolly and the floor in studios.

## HD Camera Cables: Furukawa SMPTE

Connectors: Lemo FUW + GMF – Lemo PUW + GMP



### APPLICATIONS

**Multipurpose cable: TV-OM-AMS**

This cable is suitable for wide applications such as fixed installation in facilities, relay cable, handy camera cable and patch cable.

**MULTIPURPOSE CABLE: TV-OM-SAMS**

This is a cable for large-sized TV cameras in studios. The cable has a larger outside diameter due to the additional sheath on a multipurpose cable in order not to be jammed between the camera pedestal dolly and the floor in studios.

### CHARACTERISTICS

This composite cable integrates power line for TV camera, control line, and optical fiber for video and audio transmission. The cable is standardized by SMPTE as a cable for TV camera.

### CHARACTERISTICS

This composite cable integrates power line for TV camera, control line, and optical fiber for video and audio transmission. The cable is standardized by ARIB as a cable for TV camera.

\* The cable diameter can be changed as requested by using a double sheath.

\* The cable is available in two kinds: mobile cable for use in studios or relay fields; and static cable for use in fixed installation.

ITEM	CONDITION	CHARACTERISTICS	CONVERSION	
			CONDITION (KM)	FORMULA
TRANSMISSION LOSS	$\lambda=1.3\text{MM}$	$0.5\text{dB/km}\geq$	$L\geq 0.4$	$0.5 \times L\text{dB}\geq$
			$L\geq 0.4$	$0.5 \times 0.4\text{dB}\geq$


ITEM	DESCRIPTION
Type of fiber	Single-mode silica fiber
MODE FIELD DIAMETER	$9.5\pm 1 \text{ M}$
CLAD DIAMETER	$125\pm 3 \text{ M}$
AMOUNT OF ECCENTRICITY	1 M OR LESS
CUTOFF WAVELENGTH	1.10~1.35 M
COATED OUTSIDE DIAMETER	$0.9\pm 0.1\text{MM}$

HD CAMERA CABLES - ARIB STANDARD			
PART NR.	COLOR	LENGTH	PACK. UNIT
SULEFPS1	BLACK	100 M	1



ITEM	CONDITION	CHARACTERISTICS	CONVERSION	
			CONDITION (KM)	FORMULA
TRANSMISSION LOSS	$\lambda=1.3\text{MM}$	$0.5\text{dB/km}\geq$	$L\geq 0.4$	$0.5 \times L\text{dB}\geq$
			$L\geq 0.4$	$0.5 \times 0.4\text{dB}\geq$

HD CAMERA CABLES - SMPTE STANDARD			
PART NR.	COLOR	LENGTH	PACK. UNIT
FULEFPS1	BLACK	1 M	1
FULEFPS2	BLACK	2 M	1
FULEFPS3	BLACK	3 M	1
FULEFPS6	BLACK	6 M	1
FULEFPS12	BLACK	12 M	1
FULEFPS24	BLACK	24 M	1
FULEFPS48	BLACK	48 M	1
FULEFPS100	BLACK	100 M	1
FULEFPS250	BLACK	250 M	1
FULEFPS500	BLACK	500 M	1
FULEFPS1000	BLACK	1000 M	1



ITEM	DESCRIPTION
TYPE OF FIBER	Single-mode silica fiber
MODE FIELD DIAMETER	$9.5\pm 1 \text{ M}$
CLAD DIAMETER	$125\pm 3 \text{ M}$
AMOUNT OF ECCENTRICITY	1 M OR LESS
CUTOFF WAVELENGTH	1.10~1.35 M
COATED OUTSIDE DIAMETER	$0.9\pm 0.1\text{MM}$

# Video Cables

## HD Camera Cables: Furukawa ARIB standard

Connectors: Lemo FMW + Lemo PUW + GMP



### APPLICATIONS

#### Multipurpose cable: 2SM-9.2-37.5

This cable is suitable for wide applications such as fixed installation in facilities, relay cable, handy camera cable and patch cable.

#### Large-camera cable in studio: 2SM-16-37.5

This is a cable for large-sized TV cameras in studios. The cable has a larger outside diameter due to the additional sheath on a multipurpose cable in order not to be jammed between the camera pedestal dolly and the floor in studios.

## HD Camera Cables: Furukawa ARIB standard

Connectors: Lemo FUW + GMF – Lemo PUW + GMP



### APPLICATIONS

#### Multipurpose cable: 2SM-9.2-37.5

This cable is suitable for wide applications such as fixed installation in facilities, relay cable, handy camera cable and patch cable.

#### Multipurpose cable: 2SM-16-37.5

This is a cable for large-sized TV cameras in studios. The cable has a larger outside diameter due to the additional sheath on a multipurpose cable in order not to be jammed between the camera pedestal dolly and the floor in studios.

### CHARACTERISTICS

This composite cable integrates power line for TV camera, control line, and optical fiber for video and audio transmission. The cable is standardized by ARIB as a cable for TV camera.

\* The cable diameter can be changed as requested by using a double sheath.

\* The cable is available in two kinds: mobile cable for use in studios or relay fields; and static cable for use in fixed installation.

ITEM	CONDITION	CHARACTERISTICS	CONVERSION	
			CONDITION (KM)	FORMULA
TRANSMISSION LOSS	$\Lambda=1.3\text{MM}$	$0.5\text{dB/km}\geq$	$L\geq 0.4$	$0.5 \times L\text{dB}\geq$
			$L\geq 0.4$	$0.5 \times 0.4\text{DB}\geq$

TYPE OF FIBER	Single-mode silica fiber
MODE FIELD DIAMETER	$9.5\pm 1 \text{ M}$
CLAD DIAMETER	$125\pm 3 \text{ M}$
AMOUNT OF ECCENTRICITY	1 M OR LESS
CUTOFF WAVELENGTH	1.10~1.35 M
COATED OUTSIDE DIAMETER	$0.9\pm 0.1\text{MM}$

HD CAMERA CABLES - ARIB STANDARD			
PART NR.	COLOR	LENGTH	PACK. UNIT
FULEFGS1	BLACK	1 M	1
FULEFGS2	BLACK	2 M	1
FULEFGS3	BLACK	3 M	1
FULEFGS6	BLACK	6 M	1
FULEFGS12	BLACK	12 M	1
FULEFGS24	BLACK	24 M	1
FULEFGS48	BLACK	48 M	1
FULEFGS100	BLACK	100 M	1
FULEFGS250	BLACK	250 M	1
FULEFGS500	BLACK	500 M	1
FULEFGS1000	BLACK	1000 M	1



### CHARACTERISTICS

This composite cable integrates power line for TV camera, control line, and optical fiber for video and audio transmission. The cable is standardized by ARIB as a cable for TV camera.

\* The cable diameter can be changed as requested by using a double sheath.

\* The cable is available in two kinds: mobile cable for use in studios or relay fields; and static cable for use in fixed installation.

ITEM	CONDITION	CHARACTERISTICS	CONVERSION	
			CONDITION (KM)	FORMULA
TRANSMISSION LOSS	$\Lambda=1.3\text{MM}$	$0.5\text{dB/km}\geq$	$L\geq 0.4$	$0.5 \times L\text{dB}\geq$
			$L\geq 0.4$	$0.5 \times 0.4\text{DB}\geq$

ITEM	DESCRIPTION
TYPE OF FIBER	Single-mode silica fiber
MODE FIELD DIAMETER	$9.5\pm 1 \text{ M}$
CLAD DIAMETER	$125\pm 3 \text{ M}$
AMOUNT OF ECCENTRICITY	1 M OR LESS
CUTOFF WAVELENGTH	1.10~1.35 M
COATED OUTSIDE DIAMETER	$0.9\pm 0.1\text{MM}$

HD CAMERA CABLES - SMPTE STANDARD			
PART NR.	COLOR	LENGTH	PACK. UNIT
SULEFPS1	BLACK	100 M	1



# Video Cables

## HD Camera Cables: Furukawa ARIB standard

Connectors: Lemo FUW + GMF – Lemo PUW + GMP



### APPLICATIONS

#### Multipurpose cable: 2SM-9.2-37.5

This cable is suitable for wide applications such as fixed installation in facilities, relay cable, handy camera cable and patch cable.

#### Large-camera cable in studio: 2SM-16-37.5

This is a cable for large-sized TV cameras in studios. The cable has a larger outside diameter due to the additional sheath on a multipurpose cable in order not to be jammed between the camera pedestal dolly and the floor in studios.

## HD Camera Cables: Furukawa ARIB standard

Connectors: Lemo FUW + GMF – Lemo PUW + GMP



### APPLICATIONS

#### Multipurpose cable: 2SM-9.2-37.5

This cable is suitable for wide applications such as fixed installation in facilities, relay cable, handy camera cable and patch cable.

#### Multipurpose cable: 2SM-16-37.5

This is a cable for large-sized TV cameras in studios. The cable has a larger outside diameter due to the additional sheath on a multipurpose cable in order not to be jammed between the camera pedestal dolly and the floor in studios.

### CHARACTERISTICS

This composite cable integrates power line for TV camera, control line, and optical fiber for video and audio transmission. The cable is standardized by ARIB as a cable for TV camera.


\* The cable diameter can be changed as requested by using a double sheath.

\* The cable is available in two kinds: mobile cable for use in studios or relay fields; and static cable for use in fixed installation.

ITEM	CONDITION	CHARACTERISTICS	CONVERSION	
			CONDITION (KM)	FORMULA
TRANSMISSION LOSS	λ=1.3MM	0.5dB/km≥	λ≥0.4	0.5 X LdB≥
			λ≥0.4	0.5 X 0.4DB≥

ITEM	DESCRIPTION
TYPE OF FIBER	Single-mode silica fiber
MODE FIELD DIAMETER	9.5±1 M
CLAD DIAMETER	125±3 M
AMOUNT OF ECCENTRICITY	1 M OR LESS
CUTOFF WAVELENGTH	1.10~1.35 M
COATED OUTSIDE DIAMETER	0.9±0.1MM

HD CAMERA CABLES - ARIB STANDARD			
PART NR.	COLOR	LENGTH	PACK. UNIT
SULAFPS3	BLACK	300	1



### CHARACTERISTICS

This composite cable integrates power line for TV camera, control line, and optical fiber for video and audio transmission. The cable is standardized by ARIB as a cable for TV camera.

\* The cable diameter can be changed as requested by using a double sheath.

\* The cable is available in two kinds: mobile cable for use in studios or relay fields; and static cable for use in fixed installation.

ITEM	CONDITION	CHARACTERISTICS	CONVERSION	
			CONDITION (KM)	FORMULA
TRANSMISSION LOSS	λ=1.3MM	0.5dB/km≥	λ≥0.4	0.5 X LdB≥
			λ≥0.4	0.5 X 0.4DB≥

ITEM	DESCRIPTION
TYPE OF FIBER	Single-mode silica fiber
MODE FIELD DIAMETER	9.5±1 M
CLAD DIAMETER	125±3 M
AMOUNT OF ECCENTRICITY	1 M OR LESS
CUTOFF WAVELENGTH	1.10~1.35 M
COATED OUTSIDE DIAMETER	0.9±0.1MM

HD CAMERA CABLES - SMPTE STANDARD			
PART NR.	COLOR	LENGTH	PACK. UNIT
SULEFPS3	BLACK	300	1



# Video Cables

## HD Camera Cables: Furukawa ARIB standard

Connectors: Lemo FUW + GMF – Lemo PUW + GMP – Cable Drum Schill



### APPLICATIONS

#### Multipurpose cable: 2SM-9.2-37.5

This cable is suitable for wide applications such as fixed installation in facilities, relay cable, handy camera cable and patch cable.

#### Large-camera cable in studio: 2SM-16-37.5

This is a cable for large-sized TV cameras in studios. The cable has a larger outside diameter due to the additional sheath on a multipurpose cable in order not to be jammed between the camera pedestal dolly and the floor in studios.

## HD Camera Cables: Furukawa ARIB standard

Connectors: Lemo FUW + GMF – Lemo PUW + GMP – Cable Drum Schill



### APPLICATIONS

#### Multipurpose cable: 2SM-9.2-37.5

This cable is suitable for wide applications such as fixed installation in facilities, relay cable, handy camera cable and patch cable.

#### Multipurpose cable: 2SM-16-37.5

This is a cable for large-sized TV cameras in studios. The cable has a larger outside diameter due to the additional sheath on a multipurpose cable in order not to be jammed between the camera pedestal dolly and the floor in studios.

### CHARACTERISTICS

This composite cable integrates power line for TV camera, control line, and optical fiber for video and audio transmission. The cable is standardized by ARIB as a cable for TV camera.


\* The cable diameter can be changed as requested by using a double sheath.

\* The cable is available in two kinds: mobile cable for use in studios or relay fields; and static cable for use in fixed installation.

ITEM	CONDITION	CHARACTERISTICS	CONVERSION	
			CONDITION (KM)	FORMULA
TRANSMISSION LOSS	λ=1.3MM	0.5dB/km≥	λ≥0.4	0.5 X LdB≥
			λ≥0.4	0.5 X 0.4DB≥

ITEM	DESCRIPTION
TYPE OF FIBER	Single-mode silica fiber
MODE FIELD DIAMETER	9.5±1 M
CLAD DIAMETER	125±3 M
AMOUNT OF ECCENTRICITY	1 M OR LESS
CUTOFF WAVELENGTH	1.10-1.35 M
COATED OUTSIDE DIAMETER	0.9±0.1MM

HD CAMERA CABLES - ARIB STANDARD			
PART NR.	COLOR	LENGTH	PACK. UNIT
SULAFPS5	BLACK	500	1



### CHARACTERISTICS

This composite cable integrates power line for TV camera, control line, and optical fiber for video and audio transmission. The cable is standardized by ARIB as a cable for TV camera.

\* The cable diameter can be changed as requested by using a double sheath.

\* The cable is available in two kinds: mobile cable for use in studios or relay fields; and static cable for use in fixed installation.

ITEM	CONDITION	CHARACTERISTICS	CONVERSION	
			CONDITION (KM)	FORMULA
TRANSMISSION LOSS	λ=1.3MM	0.5dB/km≥	λ≥0.4	0.5 X LdB≥
			λ≥0.4	0.5 X 0.4DB≥

ITEM	DESCRIPTION
TYPE OF FIBER	Single-mode silica fiber
MODE FIELD DIAMETER	9.5±1 M
CLAD DIAMETER	125±3 M
AMOUNT OF ECCENTRICITY	1 M OR LESS
CUTOFF WAVELENGTH	1.10-1.35 M
COATED OUTSIDE DIAMETER	0.9±0.1MM

HD CAMERA CABLES - SMPTE STANDARD			
PART NR.	COLOR	LENGTH	PACK. UNIT
SULEFPS5	BLACK	500	1



# Video Cables

## HD Camera Cables: Furukawa ARIB standard

Connectors: Lemo FUW + GMF – Lemo PUW + GMP – Cable Drum Schill



**APPLICTIONS**  
**Multipurpose cable: 2SM-9.2-37.5**  
 This cable is suitable for wide applications such as fixed installation in facilities, relay cable, handy camera cable and patch cable.

**Multipurpose cable: 2SM-16-37.5**  
 This is a cable for large-sized TV cameras in studios. The cable has a larger outside diameter due to the additional sheath on a multipurpose cable in order not to be jammed between the camera pedestal dolly and the floor in studios.

RoHS Conformity, CE

Lemo FUW, Lemo GMF

## Video Cables: Cable Tasker Triax TR8 Pur

Connectors: Lemo plug Lemo plug FBZ + FGA – FRZ + FGR



**CHARACTERISTICS**  
**Conductor:** stranded in silver-plated copper (CA)  
**Dielectric:** in foam Polyethylene (PEE)  
**I° Shield:** Braided covering 90% silver-plated copper (CA)  
**Tape:** transparent Polyester (Pet)  
**Inner Sheath:** compact Polyethylene (PE)  
**II° Shield:** Braided covering 90% O.F.C. red copper (CU)  
**Sheath:** PUR  
**Sheath colour:** Red

RoHS Conformity, CE

Lemo FRZ, Lemo FBZ

### CHARACTERISTICS

This composite cable integrates power line for TV camera, control line, and optical fiber for video and audio transmission. The cable is standardized by ARIB as a cable for TV camera.


\* The cable diameter can be changed as requested by using a double sheath.

\* The cable is available in two kinds: mobile cable for use in studios or relay fields; and static cable for use in fixed installation.

ITEM	CONDITION	CHARACTERISTICS	CONVERSION	
			CONDITION (KM)	FORMULA
TRANS-MISSION LOSS	λ=1.3MM	0.5dB/km≥	λ≥0.4	0.5 X LdB≥
			λ≥0.4	0.5 X 0.4DB≥

ITEM	DESCRIPTION
TYPE OF FIBER	Single-mode silica fiber
MODE FIELD DIAMETER	9.5±1 M
CLAD DIAMETER	125±3 M
AMOUNT OF ECCENTRICITY	1 M OR LESS
CUTOFF WAVELENGTH	1.10~1.35 M
COATED OUTSIDE DIAMETER	0.9±0.1MM

HD CAMERA CABLES - SMPTE STANDARD			
PART NR.	COLOR	LENGTH	PACK. UNIT
SULEFPS5	BLACK	500	1




TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		AVG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
TR 8 PUR	1	1 X 75 Ω (0,75 MM²)	1 X 1,00 CA	4,5	6,6	8,5	100	B	12,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHEATH	VELOCITY OF PROPAGATION OF COAX	VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	V	°C
23		56	80	2000	-20/+70

STRUCTURE RETURN LOSS (SRL) DB		
30-300	300-600	600-900
MHz	MHz	MHz
> 30	>29	>28

ATTENUATION DB/100MT					
50	100	200	400	800	1000
MHz	MHz	MHz	MHz	MHz	MHz
5,2	7,6	10,8	16,0	24,1	28,6

TR8LEMO RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
TR8LEMO1	RED	100 M	1
TR8LEMO2	RED	200 M	1
TR8LEMO3	RED	300 M	1



# Video Cables

## Video Cables: Cable Tasker Triax TR11 Pur

Connectors: Lemo plug FBZ + FGA - FRZ + FGR



**CHARACTERISTICS**

**Conductor:** stranded in silver-plated copper (CA)  
**Dielectric:** in foam Polyethylene (PEE)  
**I° Shield:** Braided covering 90% silver-plated copper (CA)  
**Tape:** transparent Polyester (Pet)  
**Inner Sheath:** compact Polyethylene (PE)  
**II° Shield:** Braided covering 90% O.F.C. red copper (CU)  
**Sheath:** PUR  
**Sheath colour:** Red

## Video Cables: Cable Tasker Triax TR11 Pur

Connectors: Lemo plug FBZ + FGA – FRZ + FGR – Cable drum Schill



**CHARACTERISTICS**

**Conductor:** stranded in silver-plated copper (CA)  
**Dielectric:** in foam Polyethylene (PEE)  
**I° Shield:** Braided covering 90% silver-plated copper (CA)  
**Tape:** transparent Polyester (Pet)  
**Inner Sheath:** compact Polyethylene (PE)  
**II° Shield:** Braided covering 90% O.F.C. red copper (CU)  
**Sheath:** PUR  
**Sheath colour:** Red


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TR 11 PUR	1	1 X 75 Ω (1,17 MM²)	19 X 0,28 CA	6,4	8,5	11	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION OF COAX	VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	V	°C
15		54	80	2000	-20/+70

STRUCTURE RETURN LOSS (SRL) DB		
30-300	300-600	600-900
MHz	MHz	MHz
>30	>28	>26

ATTENUATION DB/100MT					
50	100	200	400	800	1000
MHz	MHz	MHz	MHz	MHz	MHz
3,7	5,4	8,2	12,1	18,3	20,6

TR11LEMO RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
TR11LEMO1	RED	100 M	1
TR11LEMO2	RED	200 M	1
TR11LEMO3	RED	300 M	1




TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TR 11 PUR	1	1 X 75 Ω (1,17 MM²)	19 X 0,28 CA	6,4	8,5	11	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION OF COAX	VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	V	°C
15		54	80	2000	-20/+70

STRUCTURE RETURN LOSS (SRL) DB		
30-300	300-600	600-900
MHz	MHz	MHz
>30	>28	>26

ATTENUATION DB/100MT					
50	100	200	400	800	1000
MHz	MHz	MHz	MHz	MHz	MHz
3,7	5,4	8,2	12,1	18,3	20,6

TR11LEMO RED			
PART NR.	COLOR	LENGTH	PACK. UNIT
TR11LSEM04	RED	100 M	1



AUDIO VIDEO RICERCA E SVILUPPO LIVE MADE IN ITALY  
MP3 HOME THEATER QUALITÀ CONCERTI ISOLAMENTO TASKERCABLES.COM  
INFORMATICA COMUNICAZIONE NETWORK BROADCAST  
EVENTI MULTIVIDEO  
FLESSIBILITÀ CONNETTORI  
RICERCA E SVILUPPO LIVE MADE IN ITALY AUDIO VIDEO SYSTEM  
CONCERTI ISOLAMENTO MP3 HOME THEATER QUALITÀ TASKERCABLES.COM  
INFORMATICA COMUNICAZIONE NETWORK BROADCAST  
MULTIVIDEO NETWORK EVENTI FLESSIBILITÀ CONNETTORI


  
**tasker**  
**LIVE**



# Data Communication

Cables: Cable CAT5e UL/ETL Flexible Cable

Connectors: Neutrik NE8MC - NE8MC

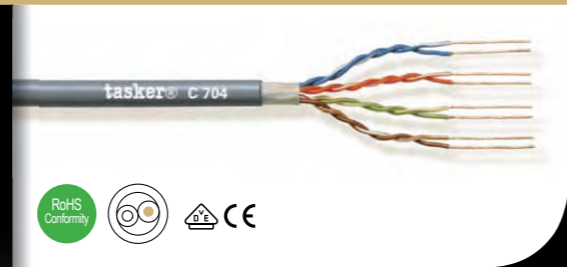

**APPLICATIONS**



U.T.P. – Unshielded Twisted Pairs cables cat. 5e UL/ETL verified for Local Area Network – LANcables.  
**tasker® C704** for fixed installations and **tasker® C705** for assembled cables or mobile installations. For **RJ 45 8 Pin** connectors.  
 Standards: **EIA/TIA 568**.

**CHARACTERISTICS**

**Conductors: C704:** stiff wire in O.F.C. red copper  
**C705:** stranded in O.F.C. red copper  
**Cond. insulation:** PE  
**Pair colours:** White/blue-Blue, White/orange-Orange, White/green-Green, White/brown-Brown  
**Total tape:** transparent Polyester (Pet)  
**External Sheath:** PVC  
**Sheath colour:** Grey

Cables: Cable Cat 5e UL/ETL Flexible Cable

Connectors: Neutrik NE8FDV – NE8MC - Cable Drum Schill

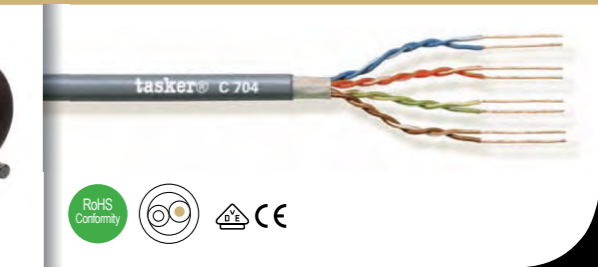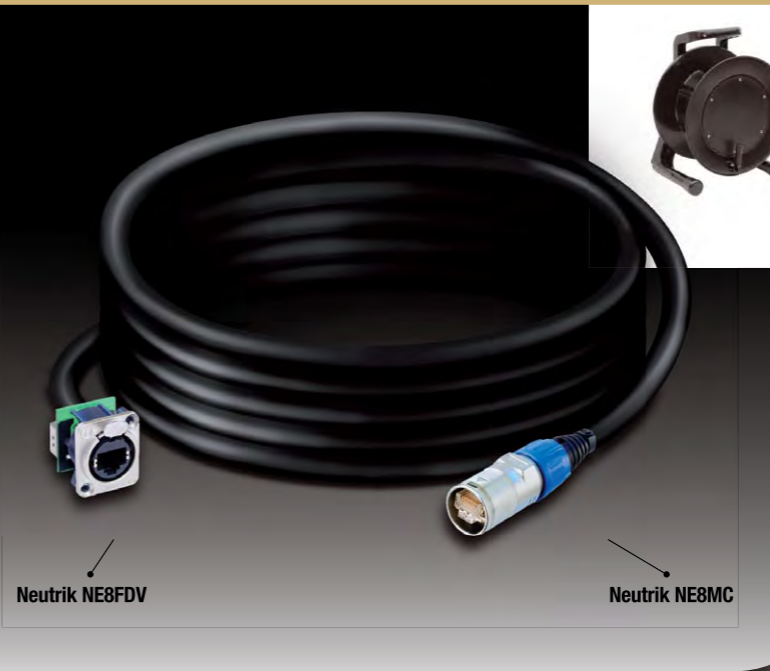

**APPLICATIONS**

U.T.P. – Unshielded Twisted Pairs cables cat. 5e UL/ETL verified for Local Area Network – LANcables.  
**tasker® C704** for fixed installations and **tasker® C705** for assembled cables or mobile installations. For **RJ 45 8 Pin** connectors.  
 Standards: **EIA/TIA 568**.

**CHARACTERISTICS**

**Conductors: C704:** stiff wire in O.F.C. red copper  
**C705:** stranded in O.F.C. red copper  
**Cond. insulation:** PE  
**Pair colours:** White/blue-Blue, White/orange-Orange, White/green-Green, White/brown-Brown  
**Total tape:** transparent Polyester (Pet)  
**External Sheath:** PVC  
**Sheath colour:** Grey

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND.NUMBER		
						mt.	Type	Kg.
		AVG	mm.	Ø mm.	mm.			
C704	4 X 2	4 X 2 X 24 (0,22 MM²)	1 X 0,51	0,9	6,0	100 300	B B	3,6 11,0
C705	4 X 2	4 X 2 X 26 (0,14 MM²)	7 X 0,15	0,9	6,0	100 300	B B	3,5 10,0

CONDUCTOR RESISTANCE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	Ω ± 5% 1 ÷ 100 MHz	AC-V	°C
90	100	49	-15/+70
140	100	49	

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND.NUMBER		
						mt.	Type	Kg.
		AVG	mm.	Ø mm.	mm.			
C704	4 X 2	4 X 2 X 24 (0,22 MM²)	1 X 0,51	0,9	6,0	100 300	B B	3,6 11,0
C705	4 X 2	4 X 2 X 26 (0,14 MM²)	7 X 0,15	0,9	6,0	100 300	B B	3,5 10,0

CONDUCTOR RESISTANCE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	Ω ± 5% 1 ÷ 100 MHz	AC-V	°C
90	100	49	-15/+70
140	100	49	

CAT5N8M BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
CAT5N8M1	BLACK	1 M	1
CAT5N8M2	BLACK	2 M	1
CAT5N8M3	BLACK	3 M	1
CAT5N8M6	BLACK	6 M	1
CAT5N8M12	BLACK	12 M	1
CAT5N8M24	BLACK	24 M	1
CAT5N8M48	BLACK	48 M	1



SA45N8M BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SA45N8M5	BLACK	50 M	1
SA45N8M1	BLACK	100 M	1



# Data Communication


Cables: Cable Cat 5e UL/ETL Flexible Cable

Connectors: 2x RJ45



RJ45

RJ45

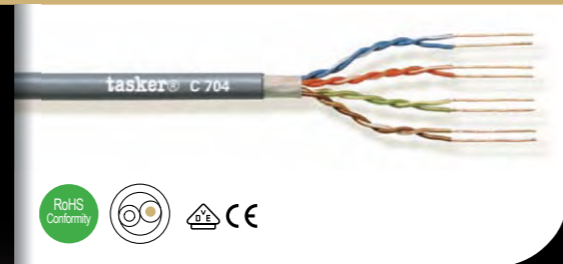

**APPLICATIONS**

U.T.P. – Unshielded Twisted Pairs cables cat. 5e UL/ETL verified for Local Area Network – LANcables.  
**tasker® C704** for fixed installations and **tasker® C705** for assembled cables or mobile installations. For **RJ 45 8 Pin** connectors.  
 Standards: **EIA/TIA 568**.

**CHARACTERISTICS**

**Conductors: C704:** stiff wire in O.F.C. red copper  
**C705:** stranded in O.F.C. red copper  
**Cond. insulation:** PE  
**Pair colours:** White/blue-Blue, White/orange-Orange, White/green-Green, White/brown-Brown  
**Total tape:** transparent Polyester (Pet)  
**External Sheath:** PVC  
**Sheath colour:** Grey


Cables: Cable Cat 5e UL/ETL Flexible Cable

Connectors: RJ45 - Neutrik NC3FXX



RJ45

NC3FXX

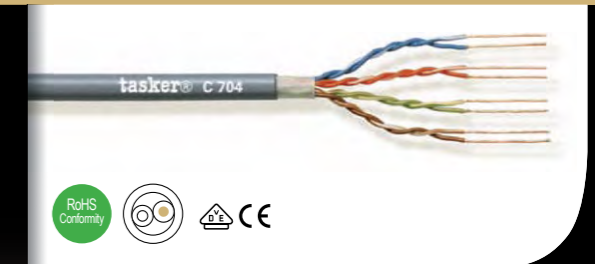

**APPLICATIONS**

U.T.P. – Unshielded Twisted Pairs cables cat. 5e UL/ETL verified for Local Area Network – LANcables.  
**tasker® C704** for fixed installations and **tasker® C705** for assembled cables or mobile installations. For **RJ 45 8 Pin** connectors.  
 Standards: **EIA/TIA 568**.

**CHARACTERISTICS**

**Conductors: C704:** stiff wire in O.F.C. red copper  
**C705:** stranded in O.F.C. red copper  
**Cond. insulation:** PE  
**Pair colours:** White/blue-Blue, White/orange-Orange, White/green-Green, White/brown-Brown  
**Total tape:** transparent Polyester (Pet)  
**External Sheath:** PVC  
**Sheath colour:** Grey


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND.NUMBER		
						mt.	Type	Kg.
		AVG	mm.	Ø mm.	mm.			
C704	4 X 2	4 X 2 X 24 (0,22 MM²)	1 X 0,51	0,9	6,0	100 300	B B	3,6 11,0
C705	4 X 2	4 X 2 X 26 (0,14 MM²)	7 X 0,15	0,9	6,0	100 300	B B	3,5 10,0

CONDUCTOR RESISTANCE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	Ω ± 5% 1 ÷ 100 MHz	AC-V	°C
90	100	49	-15/+70
140	100	49	

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND.NUMBER		
						mt.	Type	Kg.
		AVG	mm.	Ø mm.	mm.			
C704	4 X 2	4 X 2 X 24 (0,22 MM²)	1 X 0,51	0,9	6,0	100 300	B B	3,6 11,0
C705	4 X 2	4 X 2 X 26 (0,14 MM²)	7 X 0,15	0,9	6,0	100 300	B B	3,5 10,0

CONDUCTOR RESISTANCE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	Ω ± 5% 1 ÷ 100 MHz	AC-V	°C
90	100	49	-15/+70
140	100	49	

RJ45RJ BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
RJ45RJ451	BLACK	0,5 M	1
RJ45RJ452	BLACK	1 M	1
RJ45RJ453	BLACK	2 M	1
RJ45RJ454	BLACK	3 M	1
RJ45RJ455	BLACK	5 M	1
RJ45RJ456	BLACK	10 M	1



RJ45RJ BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
RJ45RJ451	BLACK	0,50 M	1



# Data Communication

**Cables:** Cable Cat 5e UL/ETL Flexible Cable

**Connectors:** RJ45 - Neutrik NC3MXX



**APPLICATIONS**


U.T.P. – Unshielded Twisted Pairs cables cat. 5e UL/ETL verified for Local Area Network – LANcables.  
**tasker® C704** for fixed installations and **tasker® C705** for assembled cables or mobile installations. For **RJ 45 8 Pin** connectors.  
 Standards: **EIA/TIA 568**.

**CHARACTERISTICS**

**Conductors: C704:** stiff wire in O.F.C. red copper  
**C705:** stranded in O.F.C. red copper  
**Cond. insulation:** PE  
**Pair colours:** White/blue-Blue, White/orange-Orange, White/green-Green, White/brown-Brown  
**Total tape:** transparent Polyester (Pet)  
**External Sheath:** PVC  
**Sheath colour:** Grey

**Cables:** Single or Multi Mode Fiber SM9 - MM50/125 uM

**Connectors:** LC - LC

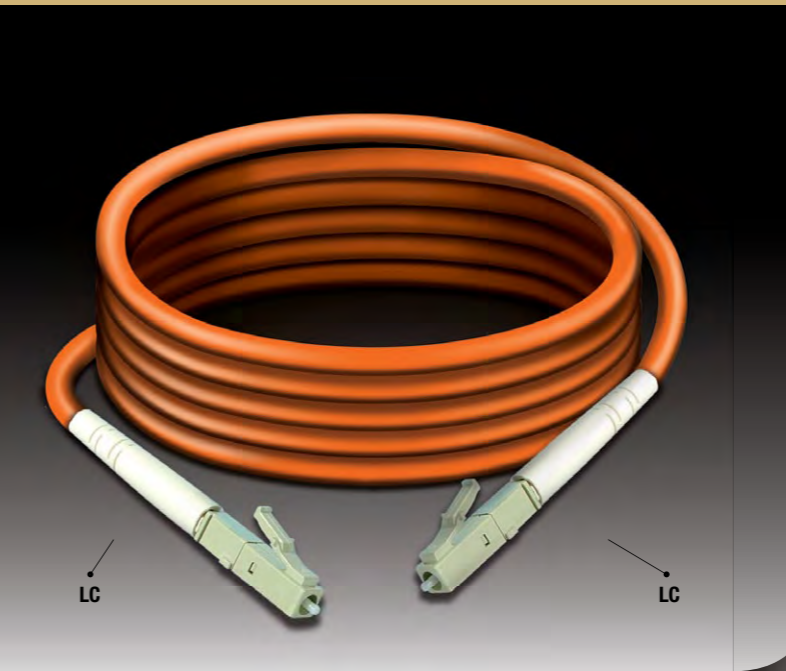

**PROPERTIES**

- Metal free indoor cable
- Each fiber strain relieved
- For direct connector assembly with strain relief
- Tube can be stripped up to 2 m
- Halogen free and non-corrosive fire gases
- Jacket material according to UL 94V-0
- Low fire load for high safety requirements

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND.NUMBER		
		AVG				mm.	Ø mm.	mm.
C704	4 X 2	4 X 2 X 24 (0,22 MM <sup>2</sup> )	1 X 0,51	0,9	6,0	100 300	B B	3,6 11,0
C705	4 X 2	4 X 2 X 26 (0,14 MM <sup>2</sup> )	7 X 0,15	0,9	6,0	100 300	B B	3,5 10,0

CONDUCTOR RESISTANCE	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
$\Omega/Km \pm 5\%$	$\Omega \pm 5\%$ $1 \div 100 \text{ MHz}$	AC-V	°C
90	100	49	-15/+70
140	100	49	

MM50/125 ORANGE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MM50/1251	ORANGE	1 M	1
MM50/1252	ORANGE	2 M	1
MM50/1253	ORANGE	3 M	1
MM50/1256	ORANGE	6 M	1
MM50/1259	ORANGE	9 M	1
MM50/1212	ORANGE	12 M	1




RJ45RJJC BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
RJ45RJJC51	BLACK	0,5 M	1



# Data Communication

**Cables:** Single or Multi Mode Fiber SM9 - MM50/125 uM

**Connectors:** SC - SC


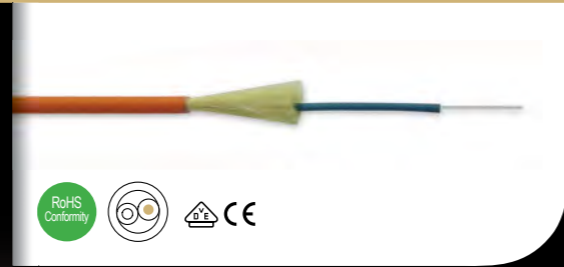


**PROPERTIES**

- Metal free indoor cable
- Each fiber strain relieved
- For direct connector assembly with strain relief
- Tube can be stripped up to 2 m
- Halogen free and non-corrosive fire gases
- Jacket material according to UL 94V-0
- Low fire load for high safety requirements

**Cables:** Single or Multi Mode Fiber SM9 - MM50/125 uM

**Connectors:** LC - SC

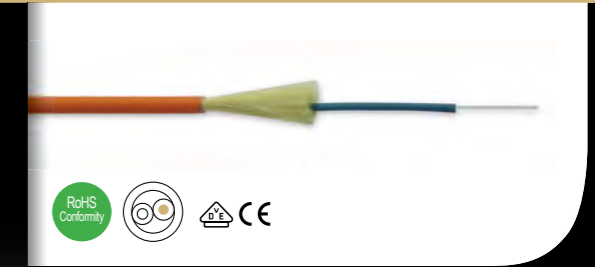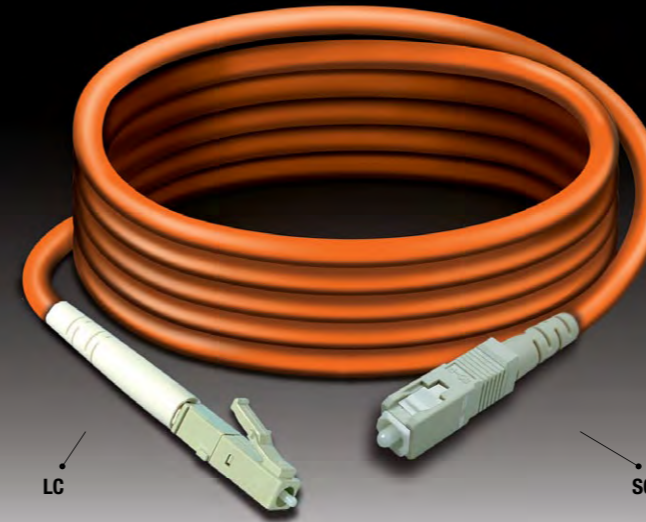

**PROPERTIES**

- Metal free indoor cable
- Each fiber strain relieved
- For direct connector assembly with strain relief
- Tube can be stripped up to 2 m
- Halogen free and non-corrosive fire gases
- Jacket material according to UL 94V-0
- Low fire load for high safety requirements

MM50/12S ORANGE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MM50/12S1	ORANGE	1 M	1
MM50/12S2	ORANGE	2 M	1
MM50/12S3	ORANGE	3 M	1
MM50/12S6	ORANGE	6 M	1
MM50/12S9	ORANGE	9 M	1
MM50/12S2	ORANGE	12 M	1




MM50/LS ORANGE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MM50/LS1	ORANGE	1 M	1
MM50/LS2	ORANGE	2 M	1
MM50/LS3	ORANGE	3 M	1
MM50/LS6	ORANGE	6 M	1
MM50/LS9	ORANGE	9 M	1
MM50/LS12	ORANGE	12 M	1



# Data Communication

**Cables:** Single or Multi Mode Fiber SM9 - MM50/125 uM

**Connectors:** ST - ST

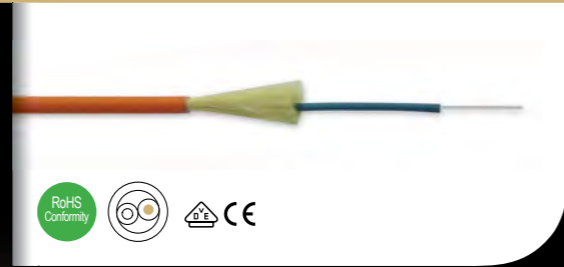


**PROPERTIES**

- Metal free indoor cable
- Each fiber strain relieved
- For direct connector assembly with strain relief
- Tube can be stripped up to 2 m
- Halogen free and non-corrosive fire gases
- Jacket material according to UL 94V-0
- Low fire load for high safety requirements

**Cables:** Single or Multi Mode Fiber SM9 - MM50/125 uM

**Connectors:** ST - LC

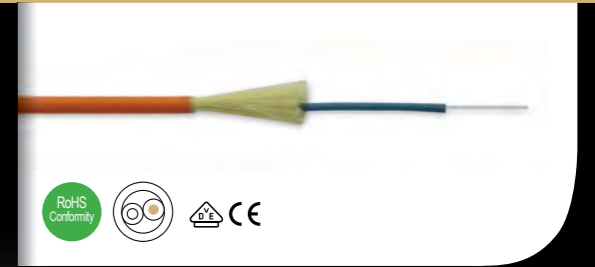

**PROPERTIES**

- Metal free indoor cable
- Each fiber strain relieved
- For direct connector assembly with strain relief
- Tube can be stripped up to 2 m
- Halogen free and non-corrosive fire gases
- Jacket material according to UL 94V-0
- Low fire load for high safety requirements

MM50/SS1 ORANGE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MM50/SS1	ORANGE	1 M	1
MM50/SS2	ORANGE	2 M	1
MM50/SS3	ORANGE	3 M	1
MM50/SS6	ORANGE	6 M	1
MM50/SS9	ORANGE	9 M	1
MM50/SS12	ORANGE	12 M	1




MM50/SL ORANGE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MM50/SL1	ORANGE	1 M	1
MM50/SL2	ORANGE	2 M	1
MM50/SL3	ORANGE	3 M	1
MM50/SL6	ORANGE	6 M	1
MM50/SL9	ORANGE	9 M	1
MM50/SL12	ORANGE	12 M	1



# Data Communication

Cables: Single or Multi Mode Fiber SM9 - MM50/125 uM

Connectors: ST - SC


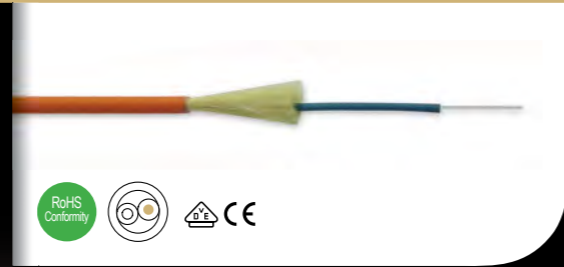


**PROPERTIES**

- Metal free indoor cable
- Each fiber strain relieved
- For direct connector assembly with strain relief
- Tube can be stripped up to 2 m
- Halogen free and non-corrosive fire gases
- Jacket material according to UL 94V-0
- Low fire load for high safety requirements

Cables: Single or Multi Mode Fiber SM9 - MM50/125 uM

Connectors: LC - LC

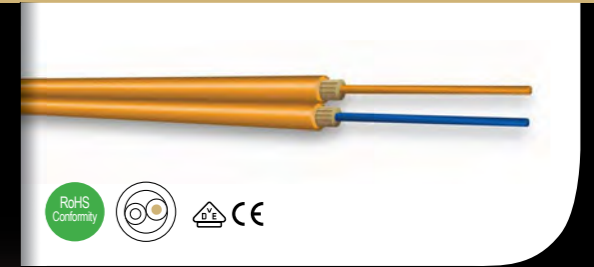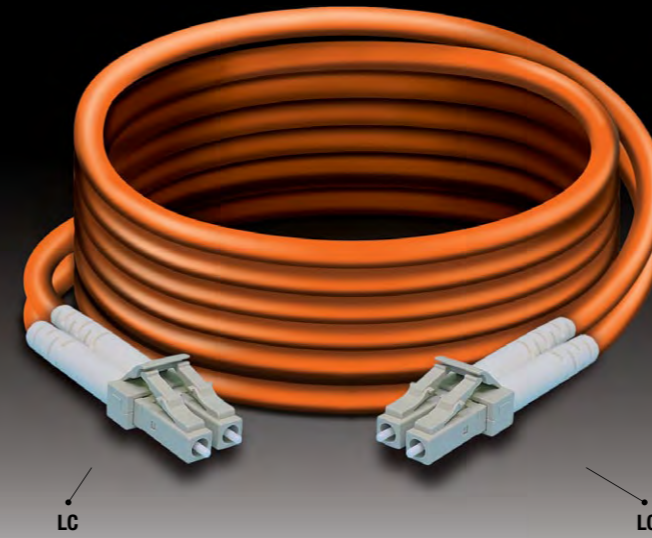

**PROPERTIES**

- Metal free indoor cable
- Each fiber strain relieved
- For direct connector assembly with strain relief
- Tube can be stripped up to 2 m
- Halogen free and non-corrosive fire gases
- Jacket material according to UL 94V-0
- Low fire load for high safety requirements

MM50/SC ORANGE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MM50/SC1	ORANGE	1 M	1
MM50/SC2	ORANGE	2 M	1
MM50/SC3	ORANGE	3 M	1
MM50/SC6	ORANGE	6 M	1
MM50/SC9	ORANGE	9 M	1
MM50/SC12	ORANGE	12 M	1





MMDPLC ORANGE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MMDPLC1	ORANGE	1 M	1
MMDPLC2	ORANGE	2 M	1
MMDPLC3	ORANGE	3 M	1
MMDPLC6	ORANGE	6 M	1
MMDPLC9	ORANGE	9 M	1
MMDPLC12	ORANGE	12 M	1



# Data Communication

Cables: Single or Multi Mode Fiber SM9 - MM50/125 uM

Connectors: LC - SC

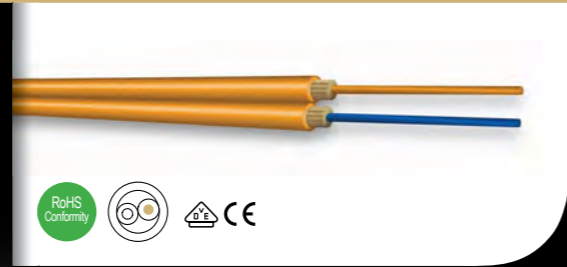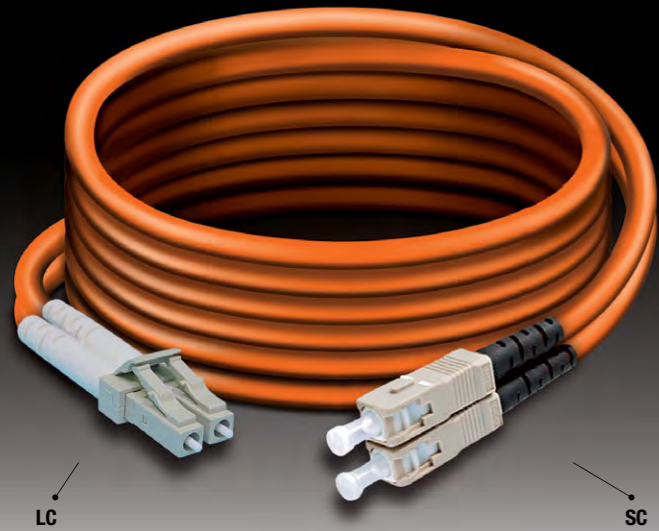


**PROPERTIES**

- Metal free indoor cable
- Each fiber strain relieved
- For direct connector assembly with strain relief
- Tube can be stripped up to 2 m
- Halogen free and non-corrosive fire gases
- Jacket material according to UL 94V-0
- Low fire load for high safety requirements

Cables: Single or Multi Mode Fiber SM9 - MM50/125 uM

Connectors: SC - SC

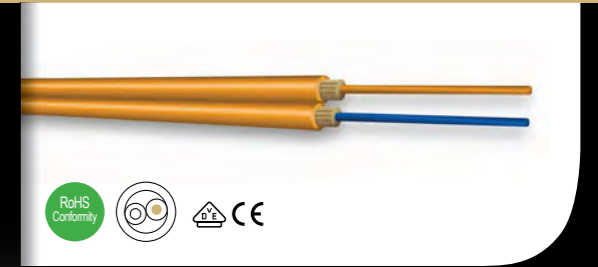

**PROPERTIES**

- Metal free indoor cable
- Each fiber strain relieved
- For direct connector assembly with strain relief
- Tube can be stripped up to 2 m
- Halogen free and non-corrosive fire gases
- Jacket material according to UL 94V-0
- Low fire load for high safety requirements

MMDPLS ORANGE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MMDPLS1	ORANGE	1 M	1
MMDPLS2	ORANGE	2 M	1
MMDPLS3	ORANGE	3 M	1
MMDPLS6	ORANGE	6 M	1
MMDPLS9	ORANGE	9 M	1
MMDPLS12	ORANGE	12 M	1





MMDPSS ORANGE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MMDPSS1	ORANGE	1 M	1
MMDPSS2	ORANGE	2 M	1
MMDPSS3	ORANGE	3 M	1
MMDPSS6	ORANGE	6 M	1
MMDPSS9	ORANGE	9 M	1
MMDPSS12	ORANGE	12 M	1



# Data Communication

Cables: Single or Multi Mode Fiber SM9 - MM50/125 uM

Connectors: ST - SC

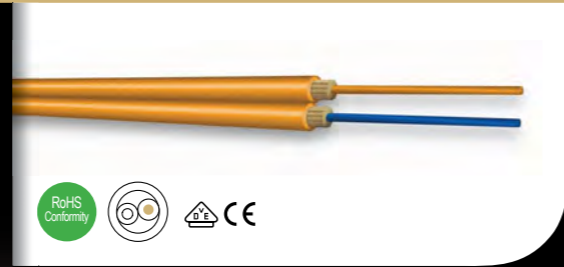
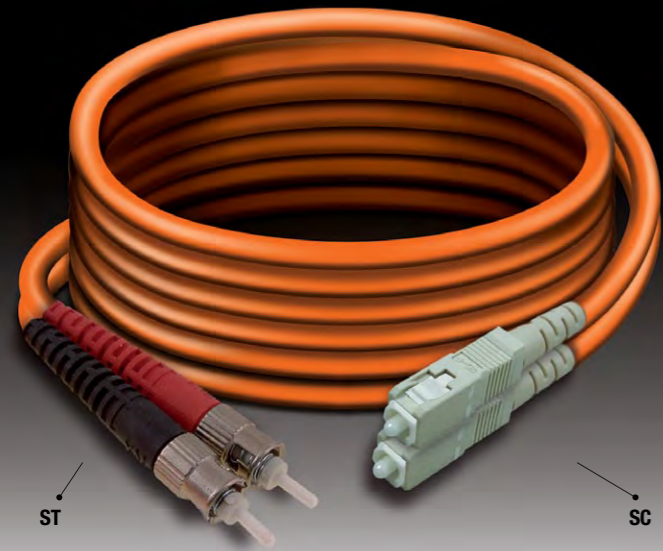


**PROPERTIES**

- Metal free indoor cable
- Each fiber strain relieved
- For direct connector assembly with strain relief
- Tube can be stripped up to 2 m
- Halogen free and non-corrosive fire gases
- Jacket material according to UL 94V-0
- Low fire load for high safety requirements

Cables: Single or Multi Mode Fiber SM9 - MM50/125 uM

Connectors: ST - LC

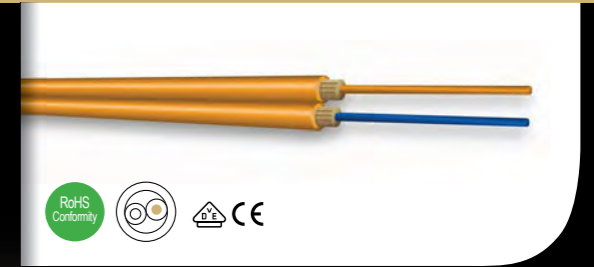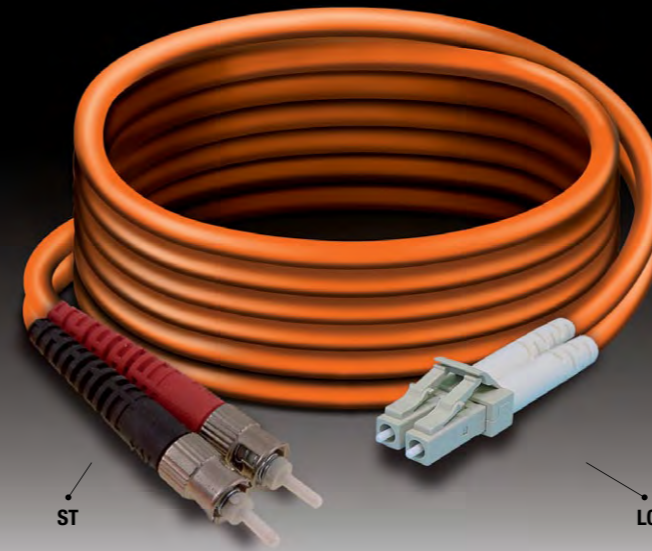

**PROPERTIES**

- Metal free indoor cable
- Each fiber strain relieved
- For direct connector assembly with strain relief
- Tube can be stripped up to 2 m
- Halogen free and non-corrosive fire gases
- Jacket material according to UL 94V-0
- Low fire load for high safety requirements

MMDPT ORANGE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MMDPT1	ORANGE	1 M	1
MMDPT2	ORANGE	2 M	1
MMDPT3	ORANGE	3 M	1
MMDPT6	ORANGE	6 M	1
MMDPT9	ORANGE	9 M	1
MMDPT12	ORANGE	12 M	1





MMDLTS ORANGE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MMDLTS1	ORANGE	1 M	1
MMDLTS2	ORANGE	2 M	1
MMDLTS3	ORANGE	3 M	1
MMDLTS6	ORANGE	6 M	1
MMDLTS9	ORANGE	9 M	1
MMDLTS12	ORANGE	12 M	1



# Data Communication

Cables: Single or Multi Mode Fiber SM9 - MM50/125 uM

Connectors: ST - ST

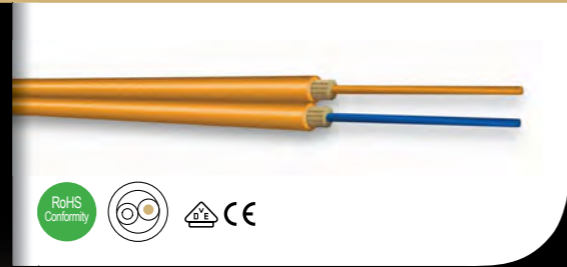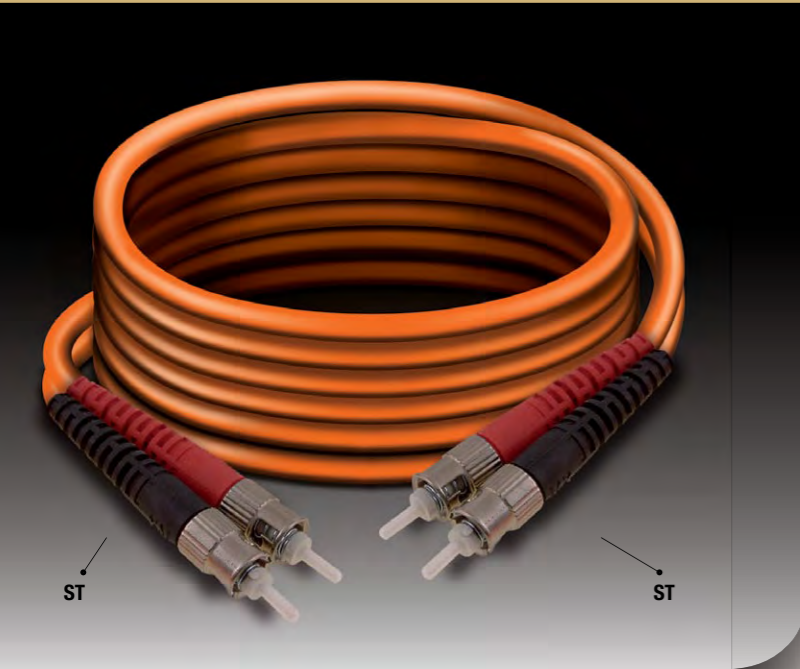


**PROPERTIES**

- Metal free indoor cable
- Each fiber strain relieved
- For direct connector assembly with strain relief
- Tube can be stripped up to 2 m
- Halogen free and non-corrosive fire gases
- Jacket material according to UL 94V-0
- Low fire load for high safety requirements

# Data Communication

Shielded Cables: Cable Tasker C512

Connectors: Sub D9 Male - Female

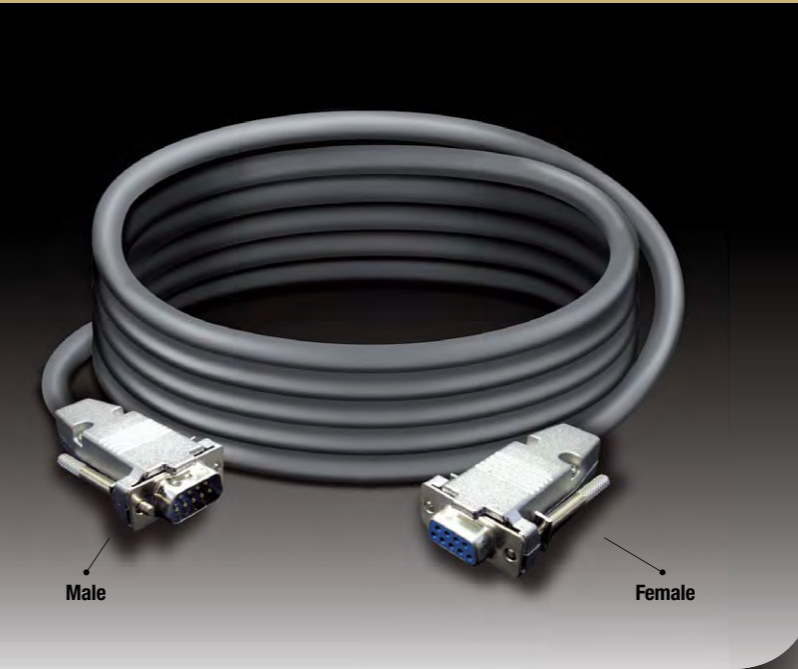

**CHARACTERISTICS**

- Conductors: stranded in O.F.C. red copper
- Cond. insulation: PEE
- Pair colours: 1) Black-Red
- 2) Black-White
- 3) Black-Green
- 4) Black-Blue
- Drain wire: stranded in O.F.C. tinned copper
- External Sheath: PVC
- Individual Shield: Al/Pet tape covering 100% for each pair
- Total tape: transparent Polyester (Pet)
- External Sheath: Flame Retardant PVC
- Sheath colour: Grey

MMDPTS ORANGE			
PART NR.	COLOR	LENGTH	PACK. UNIT
MMDPTS1	ORANGE	1 M	1
MMDPTS2	ORANGE	2 M	1
MMDPTS3	ORANGE	3 M	1
MMDPTS6	ORANGE	6 M	1
MMDPTS9	ORANGE	9 M	1
MMDPTS12	ORANGE	12 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C512	4 X 2	4 X 2 X 0,22 (24 AWG)	7 X 0,20	1,5		9,4	100		9,8

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	IMPEDANCE	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	Ω ± 5%	AC - V	°C
90	50	100	100	49	-15/+70

RS4229P GREY			
PART NR.	COLOR	LENGTH	PACK. UNIT
RS4229P1	GREY	1.5 M	1
RS4229P2	GREY	3 M	1
RS4229P3	GREY	4.5 M	1



## Content

PAGE

<b>Introduction</b> .....	3
<b>Design Criteria</b> .....	4
<b>Features &amp; Benefits</b> .....	5
<b>opticalCON DUO</b> .....	6
Cable Connector Assembly .....	7
Chassis Connector .....	7
<b>opticalCON QUAD</b> .....	7
Cable Connector Assembly .....	7
Chassis Connector .....	7
<b>Cables &amp; Applications</b> .....	8
opticalCON DUO .....	8
opticalCON QUAD .....	9
<b>Custom Entertainment Cables</b> .....	10
X-TREME Cable .....	10
Hybrid DUO Cables .....	10
<b>opticalCON Split Cables</b> .....	10
TRIPLE-SPLIT 12 Channel Cable .....	11
power QUAD .....	11
<b>Breakout &amp; Panel Solutions</b> .....	12
Breakout Box .....	12
19" Z-Panels & Plates .....	12
<b>opticalCON powerMONITOR</b> .....	13
powerMONITOR .....	13
1RU & 3RU 19" Rack Units .....	13
Breakout Box .....	13
<b>Technical Data</b> .....	14
Cable & Chassis Connectors .....	14
Wiring opticalCON DUO Cables .....	14
Fiber Cables .....	15
Wiring opticalCON QUAD Cables .....	15
<b>Ordering Information</b> .....	16
Mobile Cables .....	16
Chassis Connectors .....	19
Coupler .....	19
Measurement / Breakout Solutions .....	19
Transceiver Adapter .....	20
Accessories .....	20
Fiber Optic Measurement & Cleaning Kit .....	20
opticalCON Connector Field Assembly .....	20
powerMONITOR .....	21
D-shape Z-panels .....	21
Breakout Box .....	22
Power supply for powerMONITOR .....	22
<b>Applications</b> .....	23
Audio Application .....	24
Video/Lighting Application .....	25
Broadcast Application OB Truck .....	26
Broadcast Application SNG/ENG .....	28
Broadcast Application Studio Routing .....	29
<b>Wiring And Hook Up Suggestion</b> .....	30
opticalCON DUO Or QUAD? .....	30
Cable Wiring .....	30

## Introduction

Only a few years ago, the use of fiber optic cabling was limited to such special cases as HD broadcast cameras. Since then, the adoption of fiber optics has mushroomed. Today, fiber optic cables are widely used for digital signal transmission and network applications in the pro audio, broadcast, and touring / rental industries.

### THE APPLICATIONS FOR FIBER ARE EXTENSIVE. SOME EXAMPLES ARE:

- Network (audio, data, or DMX) transmissions with >70m (mobile) or >100m (installation) lengths, connected to professional equipment (e.g. mixers) that uses fiber optic connectors or fiber optic switching
- Digital HD video transmissions >15m (e.g. DVI, HDMI, or KVM projection) using fiber optic media converters
- Future-proof installations designed to eliminate bandwidth limitations
- Noise and EMI protection on audio or video (LED wall) applications
- Increased bandwidth, especially for broadcast applications
- Minimized cabling by embedding multiple data signals

As pro audio and broadcast equipment has evolved from analog to digital data transmission, the industry has attempted to adapt connectors originally designed for the data communication and computer industries (e.g. RJ45 connectors). Today, that trend continues with fiber optic connectors. But this is problematic. Conventional data-communication fiber optic connectors (ST, SC, LC, etc.) are optimized for permanent, one-time connection. These connectors were never designed for, and cannot withstand, the rough handling of mobile applications or the high mating cycles required in the entertainment industry. Alternative connectors, originally developed for military applications, have not been cost effective and have been deficient either in regards to dust protection or attenuation and return loss.



# Fiber Optics Neutrik OpticalCON

## Design Criteria opticalCON

Neutrik solved the various problems associated with mobile fiber optic connectivity with the launch of the opticalCON DUO fiber optic connection system in 2005. opticalCON's reliable and simple concept, with ruggedness and low maintenance at its core, has gained wide acceptance in the pro audio and broadcast industries. Well-known professional equipment manufacturers as well as key users in broadcast and rental / touring trust in opticalCON. It is our goal to turn opticalCON into an industry standard comparable to the widely used etherCON series.

opticalCON is based on LC-Duplex connectors but eliminates their inherent weaknesses, guaranteeing a safe, dust protected, and ruggedized connection. opticalCON DUO's compatibility with conventional LC connectors at both the front and the rear of the chassis connectors offers users the choice of using cost effective LC cables or ruggedized opticalCON cabling, depending on the requirements at hand. This flexibility to choose cost-effective LC cabling for system integration or ruggedized opticalCON for mobile applications benefits both OEMs and system integrators.

opticalCON DUO is most typically used for equipment connections, including various audio, lighting, and video applications. Typical uses include audio and DMX network (ring switch) applications, video projection based on fiber optic DVI, HDMI, or KVM signal converters, mobile LED panels, and various broadcast applications.

Following on the success of opticalCON DUO, the newer opticalCON QUAD series doubles the fiber count to four per cable and is designed with point-to-point connections in mind. opticalCON QUAD has been successfully deployed in such applications as data routing for touring / rental events and, especially, OB outdoor broadcast applications.

For even more fiber connections, opticalCON TRIPLE-SPLIT cable offers twelve fiber channels, split out into three QUAD connectors on each side for easy connectivity and, if required, system redundancy.

The opticalCON line continues to grow in response to our users' requirements. The specially armored X-TREME cable, available for both opticalCON DUO and opticalCON QUAD, provides the highest possible reliability. A combined opticalCON / powerCON cable provides both multichannel fiber and power. A series of patch panels, couplers, breakout boxes, color-coded springs and gaskets, and on-air powerMONITOR products eases system integration and helps assure flawless operation.




## Features & Benefits opticalCON DUO





## opticalCON QUAD




### MOBILE USE – RUGGED – LOW MAINTENANCE

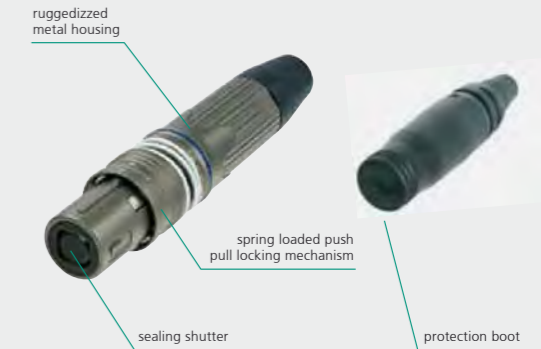


### SIMPLE INTEGRATION – COST EFFECTIVE

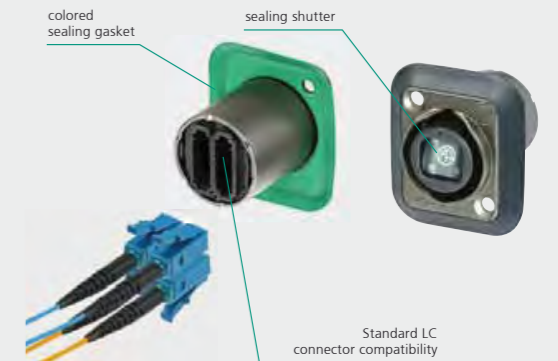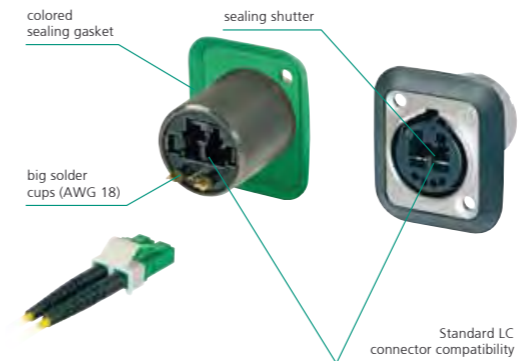

### HYBRID

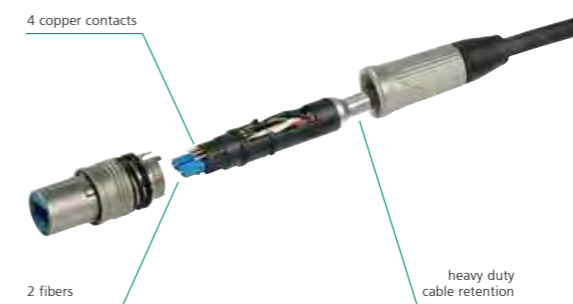


### MULTICHANNEL

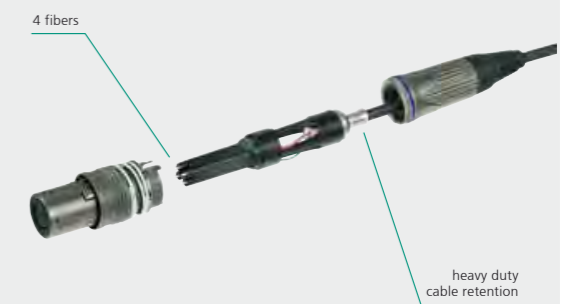

# Fiber Optics Neutrik OpticalCON

## opticalCON DUO Cable Connector Assembly



- Ruggedized and dirt-protected 2-channel fiber optic connection system
- Cable connector features rugged all-metal housing and heavy-duty cable retention
- Automatic sealing shutter with silicone gasket
- Dust and water resistant according to IP65 in mated condition
- Accommodates standard optical LC-Duplex connectors
- Field repairable
- Easy to clean, no tools required
- Reliable Push-Pull locking mechanism
- Color-coded cable connector comes pre-assembled with a choice of mobile field cables



## Chassis Connector

- Ruggedized and dirt-protected 2-channel fiber optic connection system
- Shutter with silicon gasket protects optical connection from dust and dirt
- Suggested OEM equipment connectors due to LC front compatibility
- Accommodates standard LC connectors on the rear for simple installation
- Dust and water resistant according to IP65 in mated condition
- Connection on the front side either by rugged opticalCON or standard LC connector
- Rubber sealing gasket (black, blue, green to identify fiber mode)




6



opticalCON

## opticalCON QUAD Cable Connector Assembly



- Ruggedized and dirt-protected 4-channel fiber optic connection system
- For POINT-TO-POINT multichannel routing
- Cable connector features rugged all-metal housing and heavy-duty cable retention
- Innovative spherical shutter guarantees low maintenance
- Dust and water resistant according to IP65 in mated condition
- Easy to clean, no tools required
- Reliable Push-Pull locking mechanism
- Color-coded cable connector comes pre-assembled with a choice of mobile field cables



## Chassis Connector

- Ruggedized and dirt-protected 4-channel fiber optic connection system
- For POINT-TO-POINT multichannel routing
- Laser protective metal shutter seals dust proof with two-component rubber gasket
- Dust and water resistant according to IP65 in mated condition
- Accommodates standard LC connectors on the rear for simple installation
- Rubber sealing gasket (black, blue, green to identify fiber mode)




opticalCON



7

# Fiber Optics Neutrik OpticalCON

## opticalCON DUO Cables & Applications




The opticalCON DUO is the ideal solution for equipment connections and system integration, offering LC compatibility on both the front and rear of the chassis connector. The wide range of hybrid cables covers the need for powered applications such as camera powering, SNG / ENG applications, etc.

<p><b>opticalCON DUO</b> Rugged and lightweight 2 channel mobile field cable, excellent cable retention due to aramid yarn, black PUR outer jacket, available in multi- and single mode (PC or APC), military approved.</p>	
<p><b>opticalCON DUO X-TREME</b> 2 channel X-TREME cable offering a cut-proof and rodent resistant double jacket glass yarn armoured cable construction, excellent cable retention due to aramid yarn, black PUR outer jacket.</p>	
<p><b>opticalCON DUO MULTIMODE HYBRID</b> Extra rugged hybrid cable with 2 multimode channels and 4 x 0.75mm<sup>2</sup> copper conductors, GFK strength member and aramid yarn as cable retention.</p>	
<p><b>opticalCON DUO SMPTE</b> SMPTE cable with 2 single mode channels (PC or APC), 2 x AWG24 and 2 x AWG16 stranded copper conductors, overall copperbraided shield and stainless steel strength member, 118 kg/km.</p>	
<p><b>opticalCON DUO LOW VOLTAGE HYBRID</b> Ultra flexible, cost effective and lightweight (65 kg/km) low voltage camera / SM hybrid cable with 2 single mode channels and 2 x AWG16 copper conductors, aramid yarn cable retention.</p>	
<p><b>opticalCON POWER SPLIT</b> Extra rugged hybrid cable with 2 single mode channels and 2 x 1.5 mm<sup>2</sup> copper conductors, 1.5 mm<sup>2</sup> shield, 1 opticalCON DUO cable connectors and 1 powerCON cable connector.</p>	
<p><b>opticalCON POWER SPLIT</b> Extra rugged hybrid cable with 4 single mode channels and 2 x 1.5 mm<sup>2</sup> copper conductors, 1.5 mm<sup>2</sup> shield, 2 opticalCON DUO cable connectors and 1 powerCON cable connector.</p>	
<p><b>opticalCON DUO</b> Extra rugged hybrid cable with 2 single mode channels and 2 x 1.5 mm<sup>2</sup> copper conductors, 1.5 mm<sup>2</sup> shield, 2 opticalCON DUO cable connectors and 1 powerCON cable connector.</p>	



## opticalCON QUAD Cables & Applications



The opticalCON QUAD is preferably used for POINT-TO-POINT multichannel routing applications. The TRIPLE-SPLIT 12 channel cable offers simple installation combined with a flexible connectivity system standardized on the opticalCON QUAD, while the X-TREME cable is custom designed for most demanding pro Audio live / rental applications.

	<p><b>opticalCON QUAD</b> Rugged and lightweight 4 channel mobile field cable, excellent cable retention due to aramid yarn, black PUR outer jacket, available in multi- and single mode (PC or APC).</p>	<p><b>opticalCON QUAD X-TREME</b> 4 channel X-TREME cable offering a cut-proof and rodent resistant double jacket glass yarn armoured cable construction, excellent cable retention due to aramid yarn, black PUR outer jacket.</p>
	<p><b>opticalCON QUAD TRIPLE SPLIT</b> Multichannel (12 channel) cable solution, excellent cable retention due to aramid yarn, black PUR outer jacket.</p>	<p><b>opticalCON QUAD POWER SPLIT</b> Extra rugged hybrid cable with 8 single mode channels and 2 x 1.5 mm<sup>2</sup> copper conductors, 1.5 mm<sup>2</sup> shield, 2 opticalCON QUAD cable connectors and 1 powerCON cable connector.</p>
	<p><b>NEW opticalCON POWER SPLIT</b> Extra rugged hybrid cable with 4 single mode channels and 2 x 1.5 mm<sup>2</sup> copper conductors, 1.5 mm<sup>2</sup> shield, 1 opticalCON QUAD cable connectors and 1 powerCON cable connector.</p>	<p><b>opticalCON QUAD POWER SPLIT</b> Extra rugged hybrid cable with 4 single mode channels and 2 x 1.5 mm<sup>2</sup> copper conductors, 1.5 mm<sup>2</sup> shield, 1 opticalCON QUAD cable connectors and 1 powerCON cable connector.</p>



# Fiber Optics Neutrik OpticalCON


## Custom Entertainment Cables X-TREME Cable

- opticalCON X-TREME cable for demanding applications like touring / rental or outdoor broadcast
- Offers a cut-proof and rodent-resistant double-jacket, glass-yarn armored cable construction
- Available for opticalCON DUO & QUAD



«The solution for live and rental applications»

opticalCON  
**X-TREME**

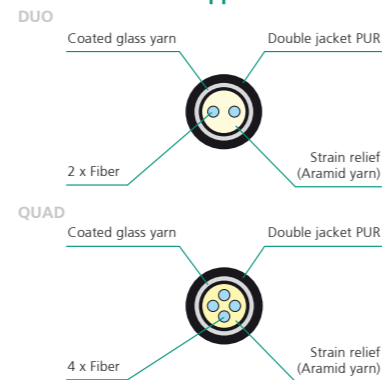

## Hybrid DUO Cables

- Range of 3 hybrid cables for powered applications:
  - SMPTE cable for indoor HD camera routing applications <sup>1</sup>
  - Hybrid multimode cable
  - Low voltage camera / SM hybrid cable for ENG/SNG applications



NKO25-S5-R\*

<sup>1</sup> ... Not compatible to SMPTE 304M standard. Suitable for indoor (studio) camera links considering specific conditions acc. to IEC 60664-1 like pollution degree 1, overvoltage category 1 and rated voltage. For detailed information ask for the White Paper "opticalCON @ SMPTE Indoor Applications".




## opticalCON Split Cables TRIPLE SPLIT 12 Channel Cable

- opticalCON multichannel solution based on the opticalCON QUAD
- maximum flexibility, combining 4 and 12 channel cables
- 1m TRIPLE SPLIT: mechanically damaged connectors can be reassembled with a slightly shortened cable split
- Color coding for channel identification




«The solution for multichannel applications»

opticalCON QUAD  
**TRIPLE SPLIT**

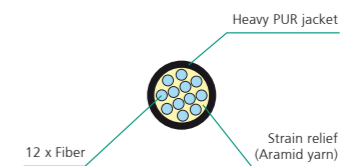

## **NEW** POWER SPLIT Cable

- Hybrid opticalCON / Power (240 Vac / 16A) solution
- 2, 4 and 8 channel assembly available
- Custom made cable, optimized for ENG / SNG applications

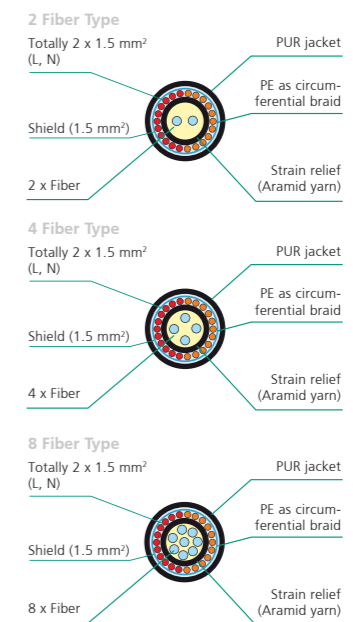

# Fiber Optics Neutrik OpticalCON

## Breakout & Panel Solutions Breakout Box

- The breakout boxes are used to split a 4-channel point-to-point opticalCON QUAD connection to either 2 dual channels or 4 single channels based on the opticalCON DUO
- Dust and waterproof according to IP65 in mated condition



## 19" Z-Panels & Plates

- Space saving design, ideal for cramped rack applications such as OB truck I/O panels
- Frame plate can be loaded with opticalCON DUO or QUAD and E2000 or ST or SC
- Frames can be equipped with frame plates (D-shape) or blind plates
- Best cable bend protection
- 1 RU or 3 RU frame


NZPF1RU



NZPF3RU



Application Example:

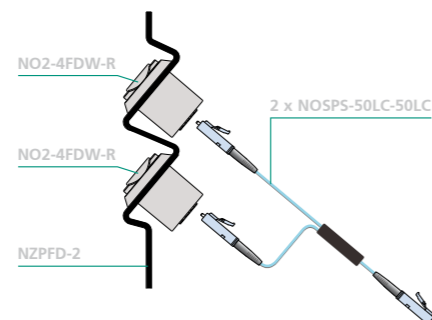

## **NEW** opticalCON powerMONITOR On air monitoring of fiber optic transmission quality

The opticalCON powerMONITOR is a cost-saving, purpose-built measurement (monitoring) device for professional fiber optic broadcast, audio and video applications. With simultaneous monitoring of attenuation for up to 4 transmission channels, powerMONITOR provides an immediate, "on air" view into fiber optic signal strength. Visual and audible alarms can be set individually for each fiber channel, based on each channel's power budget. powerMONITOR provides clear status information, delivers early warnings for potential problems, and assists with maintenance scheduling.

- On-air monitoring of fiber optic transmission quality
- Simultaneous power measurement (+0.0/-0.1dB measurement accuracy) of up to 4 channels
- Programmable threshold alarms
- Rack mount and mobile units
- Operates on rechargeable battery power or on mains power with fail-safe battery backup in case of unexpected mains power interruption
- Low loss (0.5dB maximum split loss)
- Wavelength selectable: multimode 850 nm or 1300 nm, single mode 1310 nm, 1550 nm or WDM (wave division multiplexing)

## powerMONITOR



## 1 RU & 3 RU 19" Rack units



## Breakout Box



NO4SBB1-4-PM


# Fiber Optics Neutrik OpticalCON

## Technical Data Connectors

OPTICAL	opticalCON DUO		opticalCON QUAD	
	Cable	Chassis	Cable	Chassis
Optical connector	LC-Duplex	LC-Duplex Feedthrough	PC	LC-Duplex (rear)
Fiber	Multi mode, Single mode PC / APC			
Insertion loss	< 0.5 dB / connection			
<b>MECHANICAL</b>				
Insertion / withdrawal force	< 45 N	•	•	•
Lifetime	> 5'000 cycles	•	•	•
Cable retention force	Fiber only > 500 N	•	-	-
	Hybrid > 500 N	•	-	-
	SMPTE > 350 N	•	-	-
<b>ELECTRICAL</b>				
Number of electrical contacts	4	4 (5)	-	-
Rated current	6 A	NKO2M-4S75*	-	-
	10 A (contact 1+4)	NKO2S(A)-SMPTE*	-	-
Contact resistance	< 7 mΩ	•	-	-
Insulation resistance	- initial: > 10 GΩ	•	-	-
	- after damp heat test: > 1 GΩ	•	-	-
Dielectric strength	1500 V dc	•	-	-
Rated voltage	50 V ac	• <sup>1</sup>	• <sup>1</sup>	-
<b>MATERIAL</b>				
Shell	Zinc diecast (ZnAl4Cu1)	(hard Nickel / Ruthenium plating)	•	•
Insert / Insulation	Polyamid PA 6, PBT 30% GR, PBT 50% GR	•	•	•
Insert colour	MM: black, SM PC: blue, SM APC: green	•	•	•
Contacts	- male: Brass (CuZn39Pb3)	-	-	-
	- female: Bronze (CuSn6)	-	-	-
Contact surface	Gold (gal 0.2 μm Au over 2 μm Ni)	•	-	-
Strain relief	POM (brass)	•	-	-
Bushing	ZnAl4Cu1	•	-	-
Boot	EPDM, rubber boot	•	-	-
Slit sleeve	ceramics	-	•	•
<b>ENVIRONMENTAL</b>				
Operating temperature	-25°C to +75°C	flammability UL94 HB	•	•
Solderability	complies with IEC 68-2-20	•	-	-
Protection class	in mated condition IP65	•	•	•

<sup>1</sup>... Not compatible to SMPTE 304M standard. Suitable for indoor (studio) camera links considering specific conditions acc. to IEC 60664-1 like pollution degree 1, overvoltage category 1 and rated voltage. For detailed information ask for the White Paper "opticalCON @ SMPTE Indoor Applications".

## opticalCON DUO Cables

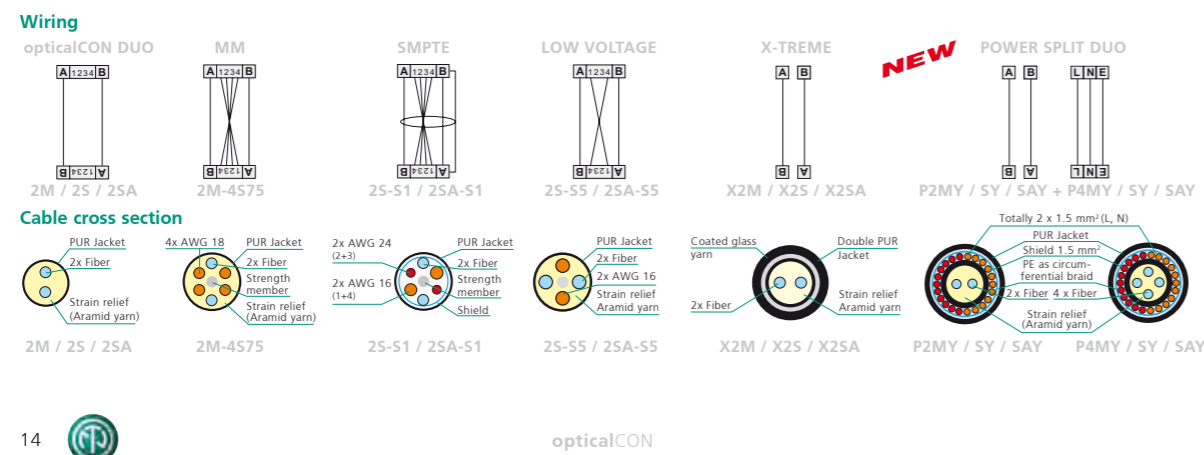


## Mobile Field Cables

	Number of fibers	MODE		FIBER	Bend optimized fiber	Laser optimized fiber	Copper wires	Outer shield	Strength member	Cable retention	Overall diameter	Jacket	Optical connector	Min. bending radius	Weight	Attenuation	Bandwidth	Refraction index	Power solution
		Multimode PC	Single mode PC / APC																
<b>opticalCON DUO</b>																			
DUO	2	•	-	•	•	-	-	-	-	-	5	•	•	5	21	@ 850 nm - 3.5 @ 1300 nm - 1.5	@ 850 nm > 1500 @ 1300 nm > 500	@ 850 nm - 1.483 @ 1300 nm - 1.479	-
DUO	2	-	•	•	N/A	-	-	-	-	-	5	•	•	5	23	@ 1310 nm - 0.5 @ 1550 nm - 0.5	-	@ 1310 nm - 1.458 @ 1550 nm - 1.458	-
DUO MM	2	•	-	•	•	-	4x	-	-	-	8.9	•	•	89	78	@ 850 nm - 2.5 @ 1300 nm - 0.7	@ 850 nm - 500 @ 1300 nm - 500	@ 850 nm - 1.482 @ 1300 nm - 1.477	-
DUO SMPTE	2	-	•	•	N/A	2x	-	2x	-	-	9.2	•	•	10	118	@ 1310 nm - 0.45 @ 1550 nm - 0.5	-	@ 1310 nm - 1.468 @ 1550 nm - 1.468	-
DUO LOW VOLTAGE HYBRID CABLE	2	-	•	•	N/A	2x	-	-	-	-	7.5	•	•	75	65	@ 1310 nm - 0.5 @ 1550 nm - 0.5	-	@ 1310 nm - 1.458 @ 1550 nm - 1.458	-
DUO X-TREME	2	•	-	•	•	-	-	-	-	-	8.5	•	•	85	79	@ 850 nm - 2.5 @ 1300 nm - 0.5	@ 850 nm > 1500 @ 1300 nm > 500	@ 850 nm - 1.482 @ 1300 nm - 1.477	-
DUO X-TREME	2	-	•	•	N/A	-	-	-	-	-	8.5	•	•	85	79	@ 1310 nm - 0.35 @ 1550 nm - 0.21	-	@ 1310 nm - 1.467 @ 1550 nm - 1.467	-
POWER SPLIT	4	-	•	•	N/A	3 x 1.5 mm <sup>2</sup>	-	-	-	-	11.7	•	•	16	121	@ 850 nm - 2.3 @ 1300 nm - 0.6	@ 850 nm ≥ 1500 @ 1300 nm ≥ 500	@ 850 nm - 1.482 @ 1300 nm - 1.477	••
POWER SPLIT	4	•	-	•	•	3 x 1.5 mm <sup>2</sup>	-	-	-	-	11.7	•	•	16	121	@ 1310 nm - 0.33 @ 1550 nm - 0.19	-	@ 1310 nm - 1.467 @ 1550 nm - 1.467	••
POWER SPLIT	2	-	•	•	N/A	3 x 1.5 mm <sup>2</sup>	-	-	-	-	11.7	•	•	16	121	@ 850 nm - 2.3 @ 1300 nm - 0.6	@ 850 nm ≥ 1500	@ 850 nm - 1.482 @ 1300 nm - 1.477	••
POWER SPLIT	2	•	-	•	•	3 x 1.5 mm <sup>2</sup>	-	-	-	-	11.7	•	•	16	121	@ 1310 nm - 0.33 @ 1550 nm - 0.19	-	@ 1310 nm - 1.467 @ 1550 nm - 1.467	••
<b>opticalCON QUAD</b>																			
QUAD	4	•	-	•	•	-	-	-	-	-	5.8	•	•	58	31	@ 850 nm - 2.5 @ 1300 nm - 0.5	@ 850 nm ≥ 1500 @ 1300 nm ≥ 500	@ 850 nm - 1.482 @ 1300 nm - 1.477	-
QUAD	4	-	•	•	N/A	-	-	-	-	-	5.8	•	•	58	31	@ 1310 nm - 0.35 @ 1550 nm - 0.21	-	@ 1310 nm - 1.467 @ 1550 nm - 1.467	-
QUAD X-TREME	4	•	-	•	•	-	-	-	-	-	8.5	•	•	85	79	@ 850 nm - 2.5 @ 1300 nm - 0.5	@ 850 nm ≥ 1500 @ 1300 nm ≥ 500	@ 850 nm - 1.482 @ 1300 nm - 1.477	-
QUAD X-TREME	4	-	•	•	N/A	-	-	-	-	-	8.5	•	•	85	79	@ 1310 nm - 0.35 @ 1550 nm - 0.21	-	@ 1310 nm - 1.467 @ 1550 nm - 1.467	-
QUAD TRIPLE SPLIT	12	•	-	•	•	-	-	-	-	-	8.2	•	•	82	76	@ 850 nm - 2.5 @ 1300 nm - 0.5	@ 850 nm ≥ 1500 @ 1300 nm ≥ 500	@ 850 nm - 1.482 @ 1300 nm - 1.477	-
QUAD TRIPLE SPLIT	12	-	•	•	N/A	-	-	-	-	-	8.2	•	•	82	76	@ 1310 nm - 0.5 @ 1550 nm - 0.3	-	@ 1310 nm - 1.467 @ 1550 nm - 1.467	-
POWER SPLIT	8	-	•	•	N/A	3 x 1.5 mm <sup>2</sup>	-	-	-	-	11.7	•	•	105	121	@ 850 nm - 2.3 @ 1300 nm - 0.6	@ 850 nm ≥ 1500 @ 1300 nm ≥ 500	@ 850 nm - 1.482 @ 1300 nm - 1.477	••
POWER SPLIT	8	•	-	•	•	3 x 1.5 mm <sup>2</sup>	-	-	-	-	11.7	•	•	105	121	@ 1310 nm - 0.33 @ 1550 nm - 0.19	-	@ 1310 nm - 1.467 @ 1550 nm - 1.467	••
POWER SPLIT	4	-	•	•	N/A	3 x 1.5 mm <sup>2</sup>	-	-	-	-	11.7	•	•	105	121	@ 850 nm - 2.3 @ 1300 nm - 0.6	@ 850 nm ≥ 1500 @ 1300 nm ≥ 500	@ 850 nm - 1.482 @ 1300 nm - 1.477	••
POWER SPLIT	4	•	-	•	•	3 x 1.5 mm <sup>2</sup>	-	-	-	-	11.7	•	•	105	121	@ 1310 nm - 0.33 @ 1550 nm - 0.19	-	@ 1310 nm - 1.467 @ 1550 nm - 1.467	••

\* Cable must be unreel completely before use!

## opticalCON QUAD Cables

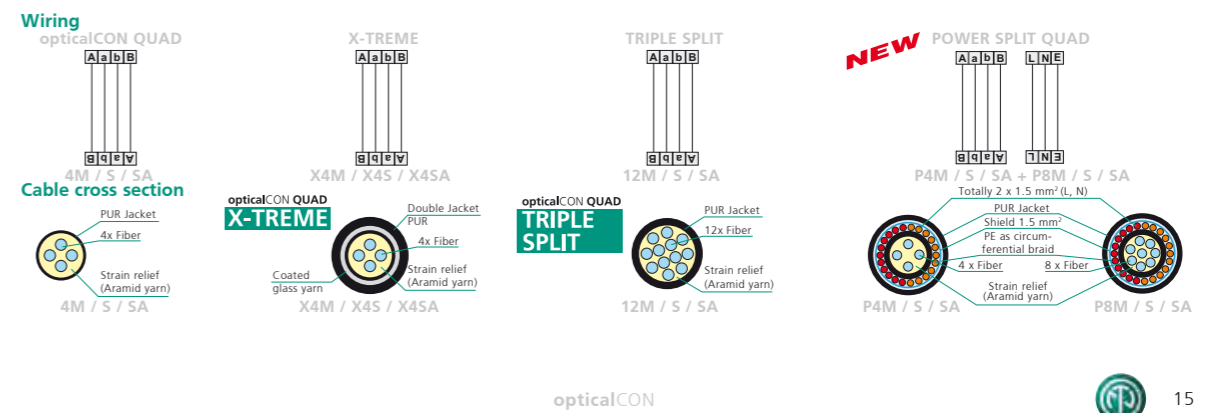

# Fiber Optics Neutrik OpticalCON

## Ordering Information Mobile Cables

### CODING OF MOBILE CABLES

Find a convenient opticalCON part number generator on [www.neutrik.com](http://www.neutrik.com)

NEUTRIK opticalCON cable assembly

Example: **N K O 2 M - 4 S 7 5 - R 3 - 5 0** (Example)

no suffix Ni

Cable	Plating		Packaging					Cable length [m]						
	hard Nickel	Ruthenium	0	1	2	3	4	5	0	1	2	3	4	5
<b>2-channel</b> PUR Jacket 2x Fiber Strain relief (Aramid yarn)	2M (PC)		•	•	•	•	•	•	<2000	<30	<200	<400	<1000	<500
	2S (PC) 2SA (APC)													
<b>Multimode HYBRID</b> PUR Jacket 2x Fiber Strength member Strain relief (Aramid yarn)	2M-4S75 (PC)		•	•	•	•	•	•	<2000	<30	-	<125	<300	<150
<b>SMPTE</b> PUR Jacket 2x Fiber Strength member Shield	2S-1 (PC) 2SA-1 (APC)		•	•	•	•	•	•	<2000	<30	-	<100	<300	<150
<b>Low Voltage Hybrid SM</b> PUR Jacket 2x Fiber Strain relief (Aramid yarn)	2S-5S (PC) 2SA-5S (APC)		-	•	•	-	•	•	<2000	<30	-	<150	<500	<250
<b>X-TREME</b> Double Jacket PUR 2x Fiber Strain relief (Aramid yarn) Coated glass yarn	X2M (PC)		-	•	•	-	•	•	<2000	<30	-	<100	<300	<150
	X2S (PC) X2SA (APC)													
<b>POWER SPLIT</b> PUR Jacket 2x 1.5 mm <sup>2</sup> Shield (1.5 mm <sup>2</sup> ) 2x Fiber Strain relief (Aramid yarn)	P2MY (PC)		-	•	•	-	•	•	<2000	-	-	<75	<200	<100
	P2SY (PC) P2SA (APC)													
<b>POWER SPLIT</b> PUR Jacket 2x 1.5 mm <sup>2</sup> Shield (1.5 mm <sup>2</sup> ) 4x Fiber Strain relief (Aramid yarn)	P4MY (PC)		-	•	•	-	•	•	<2000	-	-	<75	<200	<100
	P4SY (PC) P4SA (APC)													
<b>4-channel</b> PUR Jacket 4x Fiber Strain relief (Aramid yarn)	4M (PC)		-	•	•	•	•	•	<2000	<30	<150	<300	<800	<400
	4S (PC) 4SA (APC)													
<b>4-channel X-TREME</b> Double Jacket PUR 4x Fiber Strain relief (Aramid yarn) Coated glass yarn	X4M (PC)		-	•	•	-	•	•	<2000	<30	-	<100	<300	<150
	X4S (PC) X4SA (APC)													
<b>12-channel</b> PUR Jacket 12x Fiber Strain relief (Aramid yarn)	12M (PC)		-	•	•	-	•	•	<2000	-	-	<125	<400	<200
	12S (PC) 12SA (APC)													
<b>POWER SPLIT</b> PUR Jacket 3x 1.5 mm <sup>2</sup> Shield 8x Fiber Strain relief (Aramid yarn)	P8M (PC)		-	•	•	-	•	•	<2000	-	-	<75	<200	<100
	P8S (PC) P8SA (APC)													
<b>POWER SPLIT</b> PUR Jacket 3x 1.5 mm <sup>2</sup> Shield 4x Fiber Strain relief (Aramid yarn)	P4M (PC)		-	•	•	-	•	•	<2000	-	-	<75	<200	<100
	P4S (PC) P4SA (APC)													

1) ... Male-Female assembly on request; PC ... physical contact; APC ... angled physical contact;

### PACKAGING



### Custom Cable Assembly Attributes

**NEW**

**Custom color coding**

- 0 black (Standard color)
- 2 red
- 4 yellow
- 5 green
- 6 blue
- 9 white

**Custom cable labeling**  
1 or 2 lines (max. 18 characters)

**Crossed fiber wiring (A-A), B-B)**  
Neutrik standard: wiring acc. IEC 11801  
Gray boot

**Female assembly on cable drums**  
Cable extension solution eliminating the need for couplers.

### Attributes

X ..... Crossed fiber wiring A-A, B-B T [L1, L2] ..... Custom cable labeling  
F ..... Female drum assembly, only packaging -2 to -5 C [ ] ..... Connector color coding

### Ordering Example

Attributes

**N K O 2 M - 4 S 7 5 - R 3 - 1 5 0 X F T C** (Example, any combination possible)

Crossed fiber wiring  
Female drum assembly  
Cable labeling [L1: "CUSTOMER BRAND", L2 "DESCRIPTION"]  
Connector color coding [2]

# Fiber Optics Neutrik OpticalCON

## Ordering Information Mobile Cables

### Custom Cable Assembly Attributes for Split Cables

**NEW**

**Custom color coding**

- 0 black
- 2 red
- 4 yellow
- 5 green
- 6 blue
- 9 white

**Split text labeling**  
1 or 2 lines

**Female assembly on cable drums**  
Cable extension solution eliminating the need for couplers.

**Custom cable labeling**  
1 or 2 lines (max. 18 characters)

**Custom split length**  
Standard: length 1 m

**Stepped split assembly**  
Standard: equal split length

**Inverted powerCON on cable drum assembly**  
Standard: powerCON type on long cable: BLUE

**Crossed fiber wiring (A-A, B-B)**  
Neutrik standard: wiring acc. IEC 11801  
Gray boot


**Power OUT**

**Power IN**

### Attributes for Split Cables

X	crossed wired fibers A-A, B-B	STC5 [L1" "; L2" "]	split text green
F	female drum assembly, only packaging -2 to -5	STC6 [L1" "; L2" "]	split text blues
T [L1, L2]	custom cable labeling	STC9 [L1" "; L2" "]	split text white
STC0 [L1" "; L2" "]	split text black	SS	stepped split assembly
STC2 [L1" "; L2" "]	split text red	SL [ ]	split length in meter
STC4 [L1" "; L2" "]	split text yellow	SP	inverted powerCON in/OUT, only packaging -2 to -5

### Ordering Example

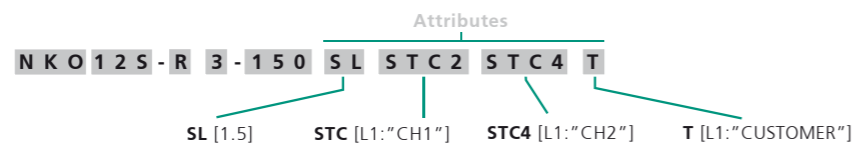

## Chassis Connectors & Breakout Solutions

### CHASSIS & COUPLER

Type	Colour	Plating	Fiber	Solder contacts	Shell ground contact	Wiring
NO2-4FDW	Chassis	<sup>1)</sup> hard Nickel	2	4	-	-
NO2-4FDW-R	Chassis	<sup>1)</sup> Ruthenium	2	4	-	-
NO2-4FDW-1	Chassis	<sup>1)</sup> hard Nickel	2	4	1	-
NO2-4FDW-1-R	Chassis	<sup>1)</sup> Ruthenium	2	4	1	-
NO4FDW-R	Chassis	<sup>1)</sup> Ruthenium	4	-	-	-
NAO2M-4S75W <sup>2)</sup>	Coupler	black	2 x LC-Duplex Multimode PC	4 x 0.75 mm <sup>2</sup>	-	A1234   B1234
NAO2S-4S75W <sup>2)</sup>	Coupler	blue	2 x LC-Duplex Single mode PC	4 x 0.75 mm <sup>2</sup>	-	A1234   B1234
NAO2SA-4S75W <sup>2)</sup>	Coupler	green	2 x LC-Duplex Single mode APC	4 x 0.75 mm <sup>2</sup>	-	A1234   B1234
NAO4MW <sup>2)</sup>	Coupler	black	4 x Multimode PC	-	-	A1234   B1234
NAO4SW <sup>2)</sup>	Coupler	blue	4 x Single mode PC	-	-	A1234   B1234
NAO4SAW <sup>2)</sup>	Coupler	green	4 x Single mode APC	-	-	A1234   B1234

<sup>1)</sup> ... Coloured labeling to indicate the fiber mode included (black: M, blue: SM PC, green: SM APC)  
<sup>2)</sup> ... add attribute X for crossed fiber wiring

### MEASUREMENT / BREAKOUT SOLUTIONS

**NKO2M-BOLC-R-0-3** (Example)

NEUTRIK opticalCON cable assembly

Plating Ruthenium

opticalCON	Cable	Breakout Connector	Packaging <sup>1)</sup>				Cable length [m]						
			0	1	2	3	4	0	1	2	3	4	
DUO	2-channel		fiber	copper	LC	SC	ST	FC	0	1	2	3	4
	2M		-	•	•	•	•	•	-	-	-	-	-
	25		25A	-	•	•	•	•	•	-	-	-	-
DUO	SMPT		fiber	copper	LC	SC	ST	FC	0	1	2	3	4
	25		25A	-S1	•	•	•	•	•	-	-	-	-
	25		25A	-S1	•	•	•	•	•	-	-	-	-
DUO	Low Voltage Hybrid SM		fiber	copper	LC	SC	ST	FC	0	1	2	3	4
	25		25A	-S5	•	•	•	•	•	-	-	-	-
	25		25A	-S5	•	•	•	•	•	-	-	-	-
QUAD	4-channel		fiber	copper	LC	SC	ST	FC	0	1	2	3	4
	4M		-	•	•	•	•	•	•	-	-	-	-
	4S	4SA	-	•	•	•	•	•	-	-	-	-	

Breakout solutions for further opticalCON cables than listed on request. <sup>1)</sup> ... Packaging options see page 16; <sup>2)</sup> ... short length only recommended

### NAOBO - Breakout Adapter

**NEW**

**NAOBO (KIT)**

Application example

- Flexible chassis mounting solution
- Adaption solution to meet existing non-opticalCON fiber installation

# Fiber Optics Neutrik OpticalCON

## Ordering Information Chassis Connectors & Breakout Solutions

### TRANSCEIVER ADAPTER



NAO2M-SFP-LC	grey	MM Transceiver Adapter + opticalCON chassis (NO2-4FDWR) without copper contacts
NAO2S-SFP-LC	blue	SM Transceiver Adapter + opticalCON chassis (NO2-4FDWR) without copper contacts
NAO2SA-SFP-LC	green	SM APC Transceiver Adapter + opticalCON chassis (NO2-4FDWR) without copper contacts

### ACCESSORIES



NDO	dummyPLUG for opticalCON chassis connector	SCDR	Rear end protection cover for D-size chassis connectors
SCNKO	Dirtprotection for opticalCON cable connector	SCDX	Hinged cover seals D-size chassis connectors, IP42 rated
SCDP-*	D-Size sealing gaskets for chassis color coding	NAO4ML-R	opticalCON QUAD LOOP connector, multimode
NOR-*	Color coding ring for cable connector coding	NAO4SL-R	opticalCON QUAD LOOP connector, single mode
* .....	*: 0- black, 2- red, 4- yellow, 5- green, 6- blue, 9- white		

## Fiber Optic Measurement & Cleaning Kit




CAS-FOCD	Fiber Optic Cleaning Devices - CASE contains hand microscope, opticalCON measurement adapter, cleaning set	CAS-FOMD	Fiber Optic Measurement Devices - CASE contains power source frame, 1.25 mm adapter and multi mode attenuator
FOCD-CF <sup>1)</sup>	Cleaning Fluid	FOMD-TC-MM850 <sup>2)</sup>	Transceiver 850 nm multimode
FOCD-DC125 <sup>1)</sup>	DRY Cleaner 1.25 mm	FOMD-TC-SM1310 <sup>2)</sup>	Transceiver 1310 nm single mode
FOCD-DC250 <sup>1)</sup>	DRY Cleaner 2.5 mm	FOMD-TC-SM1550 <sup>2)</sup>	Transceiver 1550 nm single mode
FOCD-DW <sup>1)</sup>	Lint-free dry wipes for fiber cleaning	FOMD-FM-MM <sup>2)</sup>	Fiber meter multimode
		FOMD-FM-SM <sup>2)</sup>	Fiber meter single mode

<sup>1)</sup> ... refill consumable, in CAS-FOCD included

<sup>2)</sup> ... combine with CAS-FOMD

## opticalCON Connector Field Assembly

- Neutrik opticalCON field assembly kit
- Based on Corning UniCam pre-polished LC connectors
- Requires completion of a certified Neutrik opticalCON field assembly training
- Find more details on [www.neutrik.com](http://www.neutrik.com)

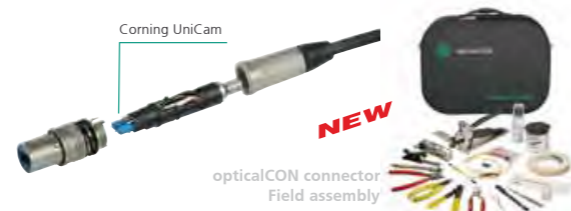

## powerMONITOR, Panels & Breakout Box

### POWERMONITOR

**NEW** NO2S - 2F - 2R - PM <sup>1)</sup>

Neutrik opticalCON	Channel	Mode	Chassis Front	Chassis Rear	power MONITOR
	2	S	2F (DUO)	2R (DUO)	PM
		SA	4F (QUAD)	4R (QUAD)	
4	M				

<sup>1)</sup> ... add attribute X for crossed fiber wiring



Front view: e.g. 4F (opticalCON QUAD)




Rear view: e.g. 2R (opticalCON DUO)

### D-SHAPE Z-PANELS


#### Panel frame 1RU



#### Panel frame 3RU

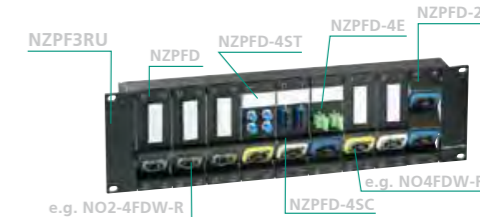

#### Angled rack panel



NZPF1RU	Panel frame 1RU opticalCON
NZPF3RU	Panel frame 3RU opticalCON
NZP1RU-8	Panel 1RU, 8 D size cutouts
NZPFD	Panel frame plate opticalCON
NZPFBP	Panel frame blind plate
NZPFD-2	Panel frame plate 2 D size cutouts
NZPFD-4E	Panel frame plate 1 D size cutout, 2 E2000 compact chassis cutouts
NZPFD-4SC	Panel frame plate 1 D size cutout, 2 SC compact chassis cutouts
NZPFD-4ST	Panel frame plate 1 D size cutout, 4 ST chassis cutouts
NZPFD-4CS-S	Panel frame plate 1 D size cutout, 4 SC simplex cutouts
NOSPM-LC50-LC50	Multimode 1 x 2 splitter LC*
NOSPS-LC50-LC50	Single mode PC 1 x 2 splitter LC*

\* ... other connectors (SC, ST, E200) on request

#### NOSPS-50LC-50LC



## Ordering Information

### BREAKOUT BOX

**NEW**




NO4SABB1-4



NO4SBB1-4-PM

NO4SBB1-2 <sup>1)</sup>	1 x NO4FDW-R to 2 x NO2-4FDW-R, Single mode PC
NO4SABB1-2 <sup>1)</sup>	1 x NO4FDW-R to 2 x NO2-4FDW-R, Single mode APC
NO4MBB1-2 <sup>1)</sup>	1 x NO4FDW-R to 2 x NO2-4FDW-R, Multimode PC
NO4SBB1-4	1 x NO4FDW-R to 4 x NO2-4FDW-R, Single mode PC
NO4SABB1-4	1 x NO4FDW-R to 4 x NO2-4FDW-R, Single mode APC
NO4MBB1-4	1 x NO4FDW-R to 4 x NO2-4FDW-R, Multimode PC



### Breakout Box with powerMONITOR

NO4\*BB1-\*-PM <sup>1)</sup> breakout box equipped with opticalCON powerMONITOR

<sup>1)</sup> ... add attribute X for crossed fiber wiring



### POWER SUPPLY FOR POWERMONITOR

**NEW**



NOPS-1RU-PM



NOPS-3RU-PM



NOPS-E-PM

NOPS-1RU-PM	opticalCON powerMONITOR 5W Power Supply, powers up to 2 power monitors, Intern. AC plugs included
NOPS-3RU-PM	opticalCON powerMONITOR 15W Power Supply, 1 + 3RU use, powers up to 9 power monitors, IEC power socket
NOPS-E-PM	opticalCON powerMONITOR, power supply extension cable to daisy-chain power



## Applications



## Applications Audio

### CLAIR BROTHERS, USA


Clair Brothers uses the opticalCON fiber systems for audio signal transmission worldwide as the standard 100 meter runs on all of their high end digital mixing console systems. They also use opticalCON fiber systems under extremely harsh outdoor conditions to distribute digital audio between delay systems (loudspeaker delay) on their larger outdoor festival situations in the US and Europe.

The inherent bulk of the opticalCON system works far better for Clair than previous lightweight fiber systems as it lays flatter and is less susceptible to kinks and being caught up under chairs and stairways in typical arena situations.

Clair Brothers is the world's largest touring company specialized in sound and staging. Through the years Clair Brothers has handled shows for some of the biggest names in the music industry, with artists such as The Eagles, AC/DC, Jonas Brothers and Sir Elton John to name a few. In January of 2009, Clair Brothers was responsible for the post inauguration event for US President Obama, where many thousands of people gathered to hear him speak in a large outdoor event.

»THE CONNECTORS HAVE PROVEN TO BE VERY RELIABLE COMPARED TO PREVIOUS DESIGNS WE HAVE TRIED IN THE PAST. IN FACT ONE SYSTEM PERFECTLY SURVIVED A TORNADO IN ITALY AT AN OUT-DOOR SHOW.«

Howard Page, senior director of engineering, Clair Brothers

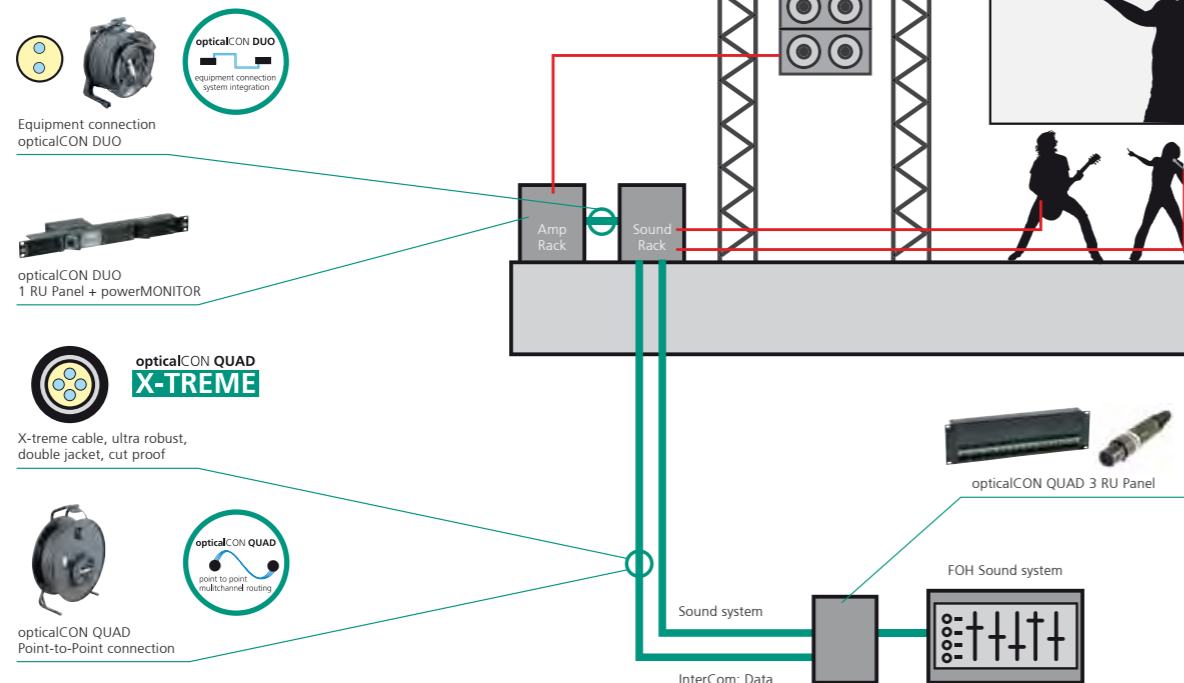

## Video/Lighting

### SOLOTECH, CANADA


Solotech uses the opticalCON connection system to transmit DVI video signals, ethernet control data (KVM), DMX networks as well as audio signals.

They work with the very latest lighting equipment and find as well innovative ways to use existing technology. The ideas of a creative team are turned into dazzling reality using articulated projectors, control boards, dimmers and an unparalleled array of cutting edge accessories. Color washes, re-imagined spaces, giant projections moving over any surface and 360° projections all spellbind audiences using the breathtaking world of visual effects.

30 years of providing lighting, video, sound and new media at both national and international levels makes Solotech known as an expert in video and lighting applications. Solotech has spent more than 10 years on tour with world stars like Celine Dion, André Rieu, the Cirque du Soleil and numerous other major artists.

»THIS SYSTEM IS FANTASTIC! NEVER HAD A FAILURE YET.«

Cyril Bême, Operations Director, Solotech

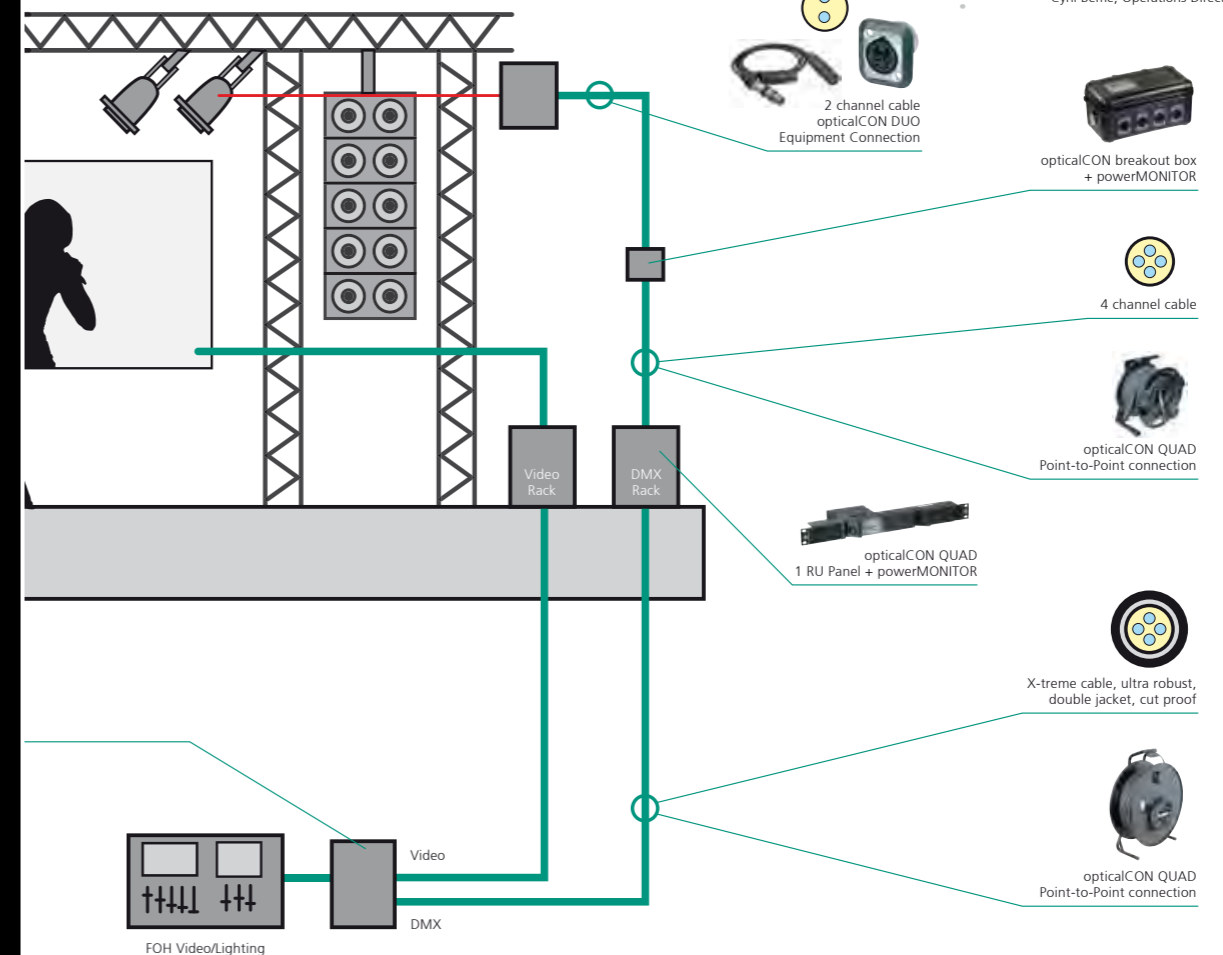

# Fiber Optics Neutrik OpticalCON

## Applications

### Broadcast - OB Truck


#### TPC, SWITZERLAND

The TPC (TV productioncenter zürich ag) has standardized the opticalCON QUAD for mobile outdoor fiber optic connectivity. The system has been applied for all fiber optic point-to-point routing applications, no matter what type of signal is required.

#### The provided fiber services include:

- Camera signals
- Video signal (monitors, displays, wall-displays)
- Audio networking
- Intercom
- Data (Ethernet, RS422, RS232)
- Broadcast signal distribution

With the standardization of the opticalCON the fiber optic point-to-point connectivity is nationwide compatible on I/O panels of OB-trucks, SNG-trucks, stadiums or national broadcast signal distribution boxes.

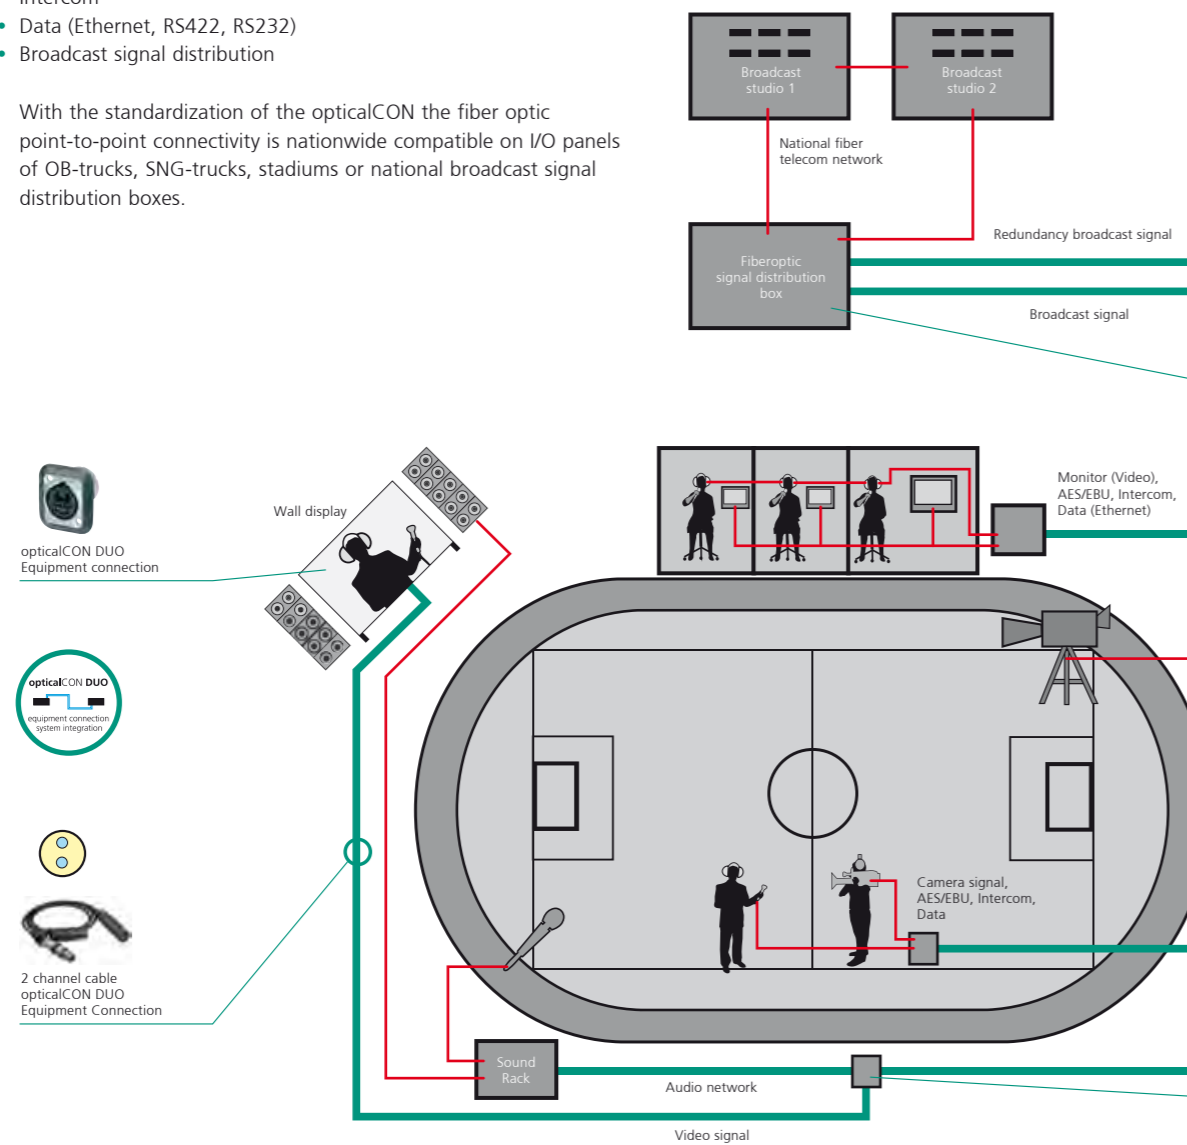


Depending to the size of the required installation, the setup team has the choice between 12 or 4 channel cables which are both based on the opticalCON QUAD connection system. The same cable can be used no matter if big stadium events, outdoor events (e.g. ski races) or SNG/ENG applications are required. Each channel can be in-dividually patched to the required equipment for the specific job.

»NEW EQUIPMENT AND NEW TECHNOLOGIES LIKE FOR EXAMPLE HDTV, ASK FOR INCREASING DATA TRANSMISSION RATES, WHICH CAN HARDLY BE REALIZED WITH COPPER CABLES ANY MORE. IN THIS REGARD FIBER OPTICS CAN BE CLASSIFIED AS THE PERFECT SUITABLE AND UP TO DATE TRANSMITTING MEDIUM FOR NEW TECHNOLOGIES. THE CONSEQUENT USE OF FIBER OPTICS REQUIRES A RELIABLE CONNECTOR ACCORDINGLY. TPC (TV PRODUCTION CENTER ZURICH AG) HAS CHOSEN THE OPTICALCON FIRST OF ALL BECAUSE OF ITS OPERATING RELIABILITY.«

Bruno Keller, project supervisor engineering

The TPC (TV productioncenter zürich ag) is part of SRG SSR idée suisse.

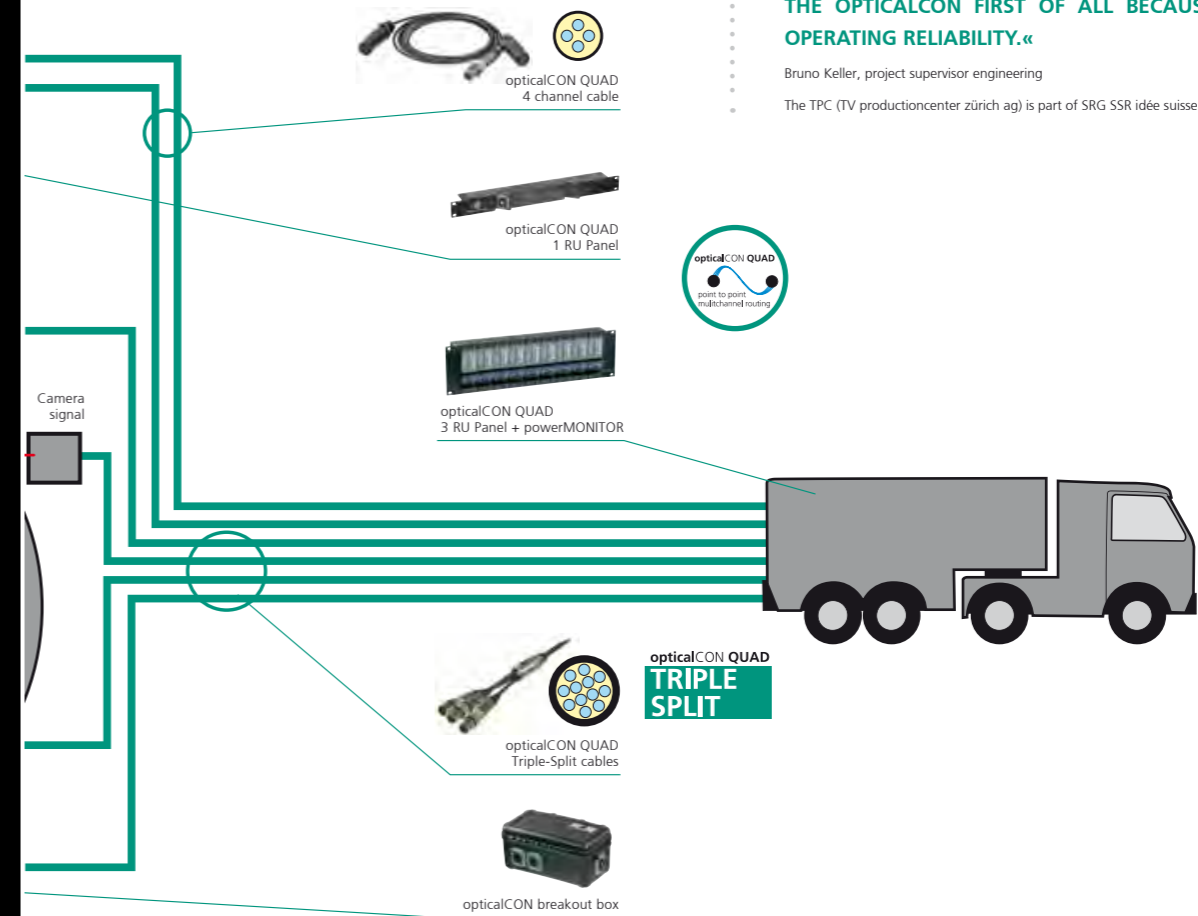

## Applications Broadcast - SNG/ENG

### BORIS TV, UNITED KINGDOM


Boris TV uses Neutrik's opticalCON Low Voltage cable for series productions (e.g. at Twickenham Film Studios). The production requires frequent reconnection of links to cameras in a dusty environment, the shutters seal proved effective in preventing dust contamination of fibres.

The low voltage camera cable is a cost effective fiber optic hybrid cable solution and a great SMPTE cable alternative if only low voltage is required. The ultra flexible and lightweight (65 kg/km) design is optimized for camera link systems (e.g. for ENG / SNG<sup>1</sup>), camera adapter systems, camera cranes and powered drop down converter boxes for broadcast applications where only ELV<sup>2</sup> (< 50Vac) is required.


»A PARTICULAR BENEFIT TO BORIS TELEVISION LTD HAS BEEN THE ABILITY TO CARRY ENOUGH CABLE TO SUPPORT 8 CAMERAS WITH A RANGE OF 150 M EACH WITHOUT REQUIRING ADDITIONAL LOGISTICAL SUPPORT TO CARRY CABLE TO THE LOCATION, THE LIGHT WEIGHT BEING A FURTHER BENEFIT IN THE HEALTH AND SAFETY ASPECT OF CABLE HANDLING WHEN COMPARED WITH OTHER TRIAX OR SMPTE FIBRE SYSTEMS. THIS FEATURE HAS ALLOWED BORIS TV TO REDUCE ITS SET UP AND BREAKDOWN CREW REQUIREMENT.«

CJ Smith, Managing Director, Van Diemen Films Ltd

Boris TV is a multicamera OB and equipment hire business which is part of Van Diemen Films.



- 1) ... Electronic News Gathering / Satellite News Gathering
- 2) ... Extra Low Voltage

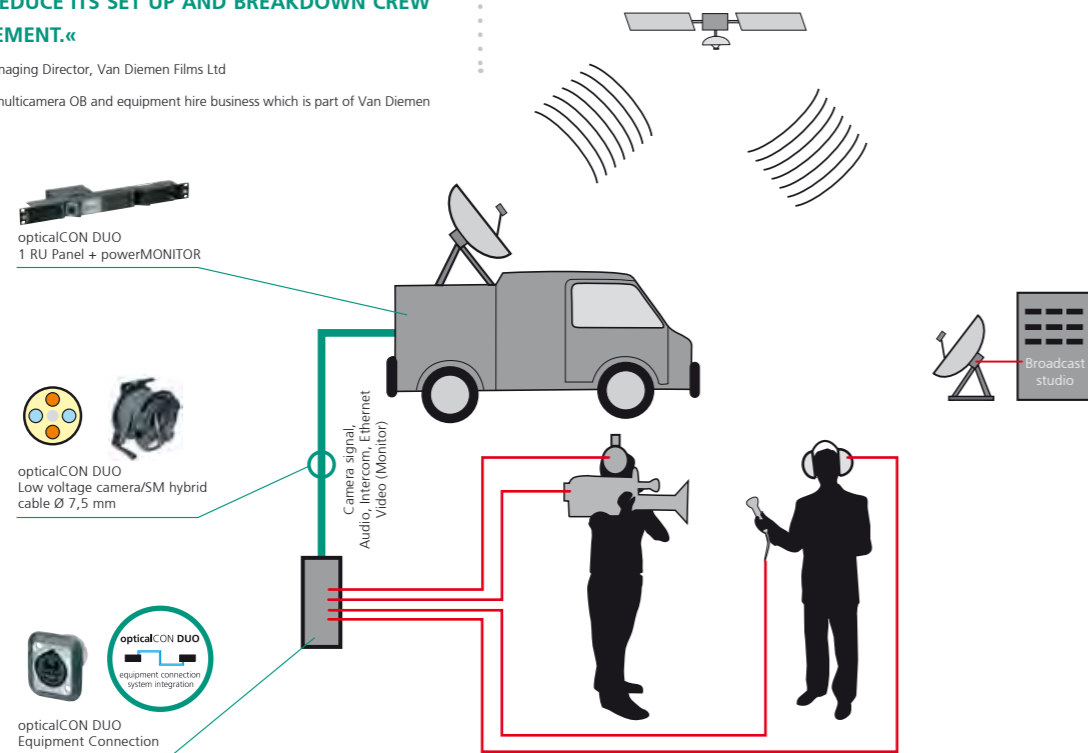


## Broadcast - Studio Routing

opticalCON is the ideal solution for studio / OB-van patch rack applications. The system's sealing shutters ensure high mating cycles and minimized maintenance.

Typically used in high quantities, opticalCON chassis connectors are simple to install and very cost effective compared to other robust fiber optic connection systems. In particular, the opticalCON DUO chassis connector is well suited for system integrations, as it offers LC compatibility on both front and rear. With its four copper contacts, opticalCON DUO can be used both with cost-effective permanent LC patch cables and also for hybrid powered connections to broadcast cameras.


Boris TV uses the opticalCON DUO system with Low Voltage cables (e.g. at Desmet Studios in Amsterdam) for its frequent reconfigurations of camera and cable setups between studios. The system has proven to be effective and reliable.

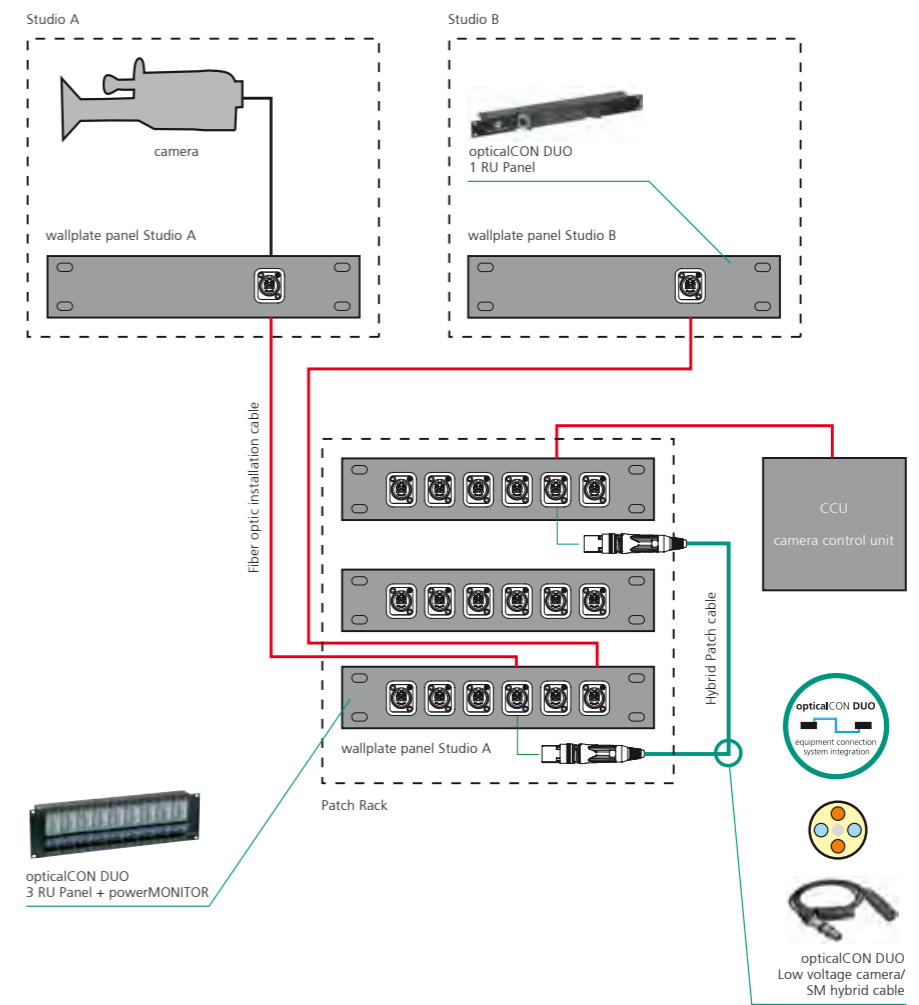

# Fiber Optics Neutrik OpticalCON

## Wiring And Hook Up Suggestion opticalCON DUO Or QUAD?

The opticalCON connection system offers high flexibility. The front and rear LC compatibility of the 2-channel opticalCON DUO makes the system ideal for equipment connections and system integration. The 4-channel opticalCON QUAD is focused on mobile, multichannel point-to-point connections.

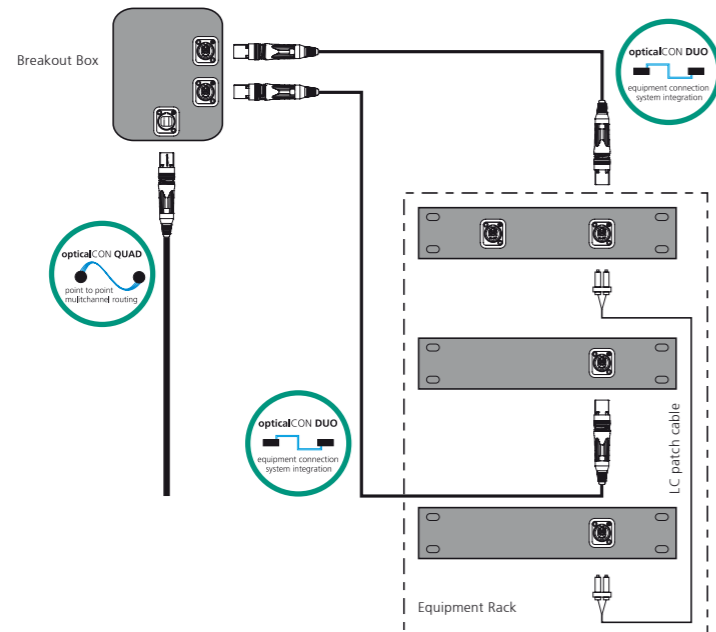

## Cable Wiring

### Fiber


In order to achieve uniform and compatible systems, Neutrik recommends following the wiring suggestions of the ISO / IEC 11801 which define channel A (right) as input and channel B (left) as output.



### Copper


#### SMPTE WIRING

For studio camera wiring, Neutrik recommends following the SMPTE wiring suggestion:




#### Low Voltage

For ELV (Extra Low Voltage) applications (< 50 V) Neutrik recommends the following wiring.



## NOTES

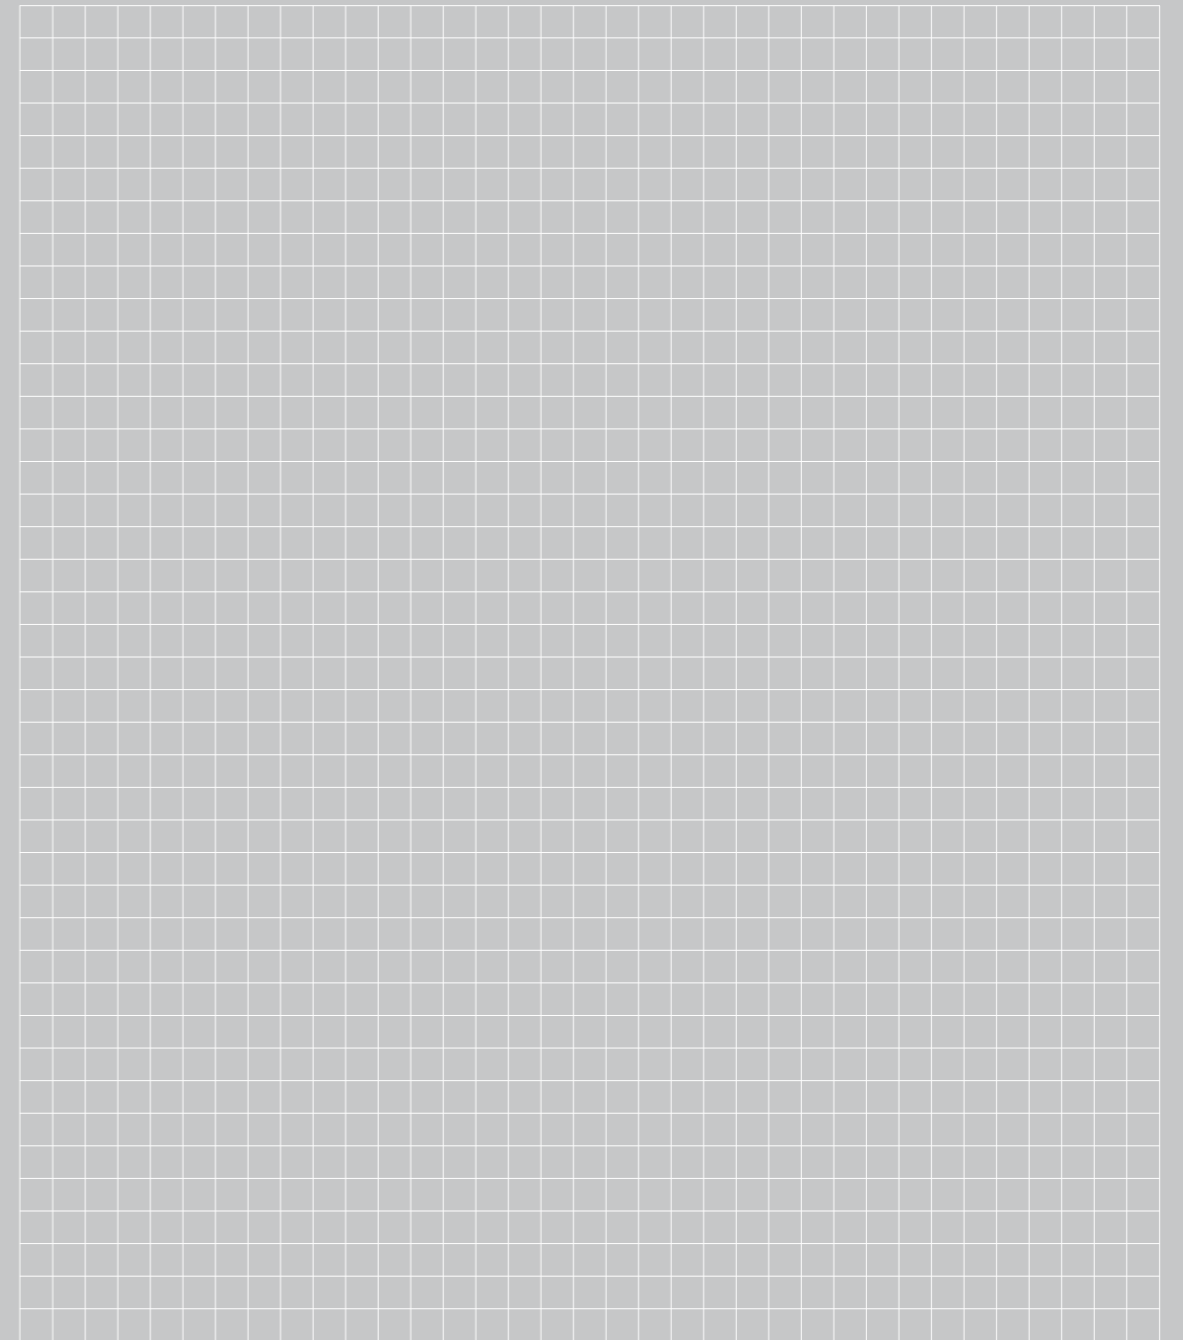

# Note

tasker®

tasker®



# Multicore Cables

## Balanced Microphone Cables: Cable Tasker C312

Connectors: 12x Neutrik NC3FD - Stagebox 12 Inputs - LK37



### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Cable Tasker C312

Connectors: 12x Neutrik NC3FD - Stagebox 12 Inputs - Harting D42 (top or side entry)



### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

### APPLICATIONS


Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C312	12 X 2	12 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	16,0	100	B	45,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

S212LK BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S212LK10	BLACK	10 M	1
S212LK20	BLACK	20 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C312	12 X 2	12 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	16,0	100	B	45,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

S212HA BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S212HA10	BLACK	10 M	1
S212HA20	BLACK	20 M	1



# Multicore Cables

**Balanced Microphone Cables: Cable Tasker C316** Connectors: 12x Neutrik NC3FD + 4x Neutrik NC3MD - Stagebox 12 In/ 4 Outputs - Harting D72 (top or side entry)

**Balanced Microphone Cables: Cable Tasker C316** Connectors: 16x Neutrik NC3FD - Stagebox 16 Inputs - LK54



**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black



**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C316	16 X 2	16 X 2 X 24 (0,22 MM²)	28 X 0,10	1,0	3,0	18,0	100	B	52,0

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C316	16 X 2	16 X 2 X 24 (0,22 MM²)	28 X 0,10	1,0	3,0	18,0	100	B	52,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

S216HD BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S216HD10	BLACK	10 M	1
S216HD20	BLACK	20 M	1



S216CK BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S216CK10	BLACK	10 M	1
S216CK20	BLACK	20 M	1



Multicore Cables: Stage Box Analogue

Multicore Cables: Stage Box Analogue

# Multicore Cables

## Balanced Microphone Cables: Cable Tasker C316

Connectors: 16x Neutrik NC3FD - Stagebox 16 Inputs - Harting D72 (top or side entry)



### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Cable Tasker C316 Connectors: 12x Neutrik NC3FD + 4x Neutrik NC3MD -

Stagebox 12 In/ 4 Outputs - Harting D72 (top or side entry)



### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C316	16 X 2	16 X 2 X 24 (0,22 MM²)	28 X 0,10	1,0	3,0	18,0	100	B	52,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

S20654 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S2065410	BLACK	10 M	1
S2065420	BLACK	20 M	1



### APPLICATIONS

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C316	16 X 2	16 X 2 X 24 (0,22 MM²)	28 X 0,10	1,0	3,0	18,0	100	B	52,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

S212LKDX BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S212LKDX1	BLACK	10 M	1
S212LKDX2	BLACK	20 M	1



# Multicore Cables

## Balanced Microphone Cables: Cable Tasker C316

Connectors: 12x Neutrik NC3FD + 4x Neutrik NC3MD - Stagebox 12 In/ 4 Outputs - LK54



**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Cable Tasker C332

Connectors: 24x Neutrik NC3FD + 8x Neutrik NC3MD - Stagebox 24 In/ 8 Outputs - LK100



**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C316	16 X 2	16 X 2 X 24 (0,22 MM²)	28 X 0,10	1,0	3,0	18,0	100	B	52,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

C212LKDD BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
C212LKDD1	BLACK	10 M	1
C212LKDD2	BLACK	20 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C332	32 X 2	32 X 2 X 24 (0,22 MM²)	28 X 0,10	1,0	3,0	24,0	100	B	95,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

S32XAEE BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S32XAEE1	BLACK	10 M	1
S32XAEE2	BLACK	20 M	1



# Multicore Cables

**Balanced Microphone Cables: Cable Tasker C332 Connectors: 24x Neutrik NC3FD +**

**8x Neutrik NC3MD - Stagebox 24 In/ 8 Outputs - Harting D108 (top or side entry)**



**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

**Balanced Microphone Cables: Cable Tasker C336**

**Connectors: 28x Neutrik NC3FD + 8x Neutrik NC3MD - Stagebox 28 In/ 8 Outputs - LK150**



**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C332	32 X 2	32 X 2 X 24 (0,22 MM²)	28 X 0,10	1,0	3,0	24,0	100	B	95,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

S32XAEH BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S32XAEH1	BLACK	10 M	1
S32XAEH2	BLACK	20 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C336	36 X 2	36 X 2 X 24 (0,22 MM²)	28 X 0,10	1,0	3,0	24,0	100	B	95,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

S32XA15 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S32XA150	BLACK	10 M	1
S32XA151	BLACK	20 M	1



# Multicore Cables

**Balanced Microphone Cables: Cable Tasker C336 Connectors: 28x Neutrik NC3FD + 8x Neutrik NC3MD -**

Stagebox 28 In/ 8 Outputs - Harting D108 (top or side entry)



**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

**Balanced Microphone Cables: Cable Tasker C348**

**Connectors: 40x Neutrik NC3FD + 8x Neutrik NC3MD - Stagebox 40 In/ 8 Outputs - LK150**



**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C336	36 X 2	36 X 2 X 24 (0,22 MM²)	28 X 0,10	1,0	3,0	26,0	100	B	105,0

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C348	48 X 2	48 X 2 X 24 (0,22 MM²)	28 X 0,10	1,0	3,0	28,0	100	B	135,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

S32XA36 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S32XA360	BLACK	10 M	1
S32XA361	BLACK	20 M	1



S32XA48 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S32XA480	BLACK	10 M	1
S32XA481	BLACK	20 M	1



Multicore Cables: Stage Box Analogue

Multicore Cables: Stage Box Analogue

# Multicore Cables

**Balanced Microphone Cables: Cable Tasker C348 Connectors: 40x Neutrik NC3FD +**

**8x Neutrik NC3MD - Stagebox 40 In/ 8 Outputs - Harting D144 (top or side entry)**



**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

**Balanced Microphone Cables: Cable Tasker C352**

**Connectors: 52x Neutrik NC3FD - Stagebox 52 Inputs - Harting D216 (top or side entry)**



**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C348	48 X 2	48 X 2 X 24 (0,22 MM²)	28 X 0,10	1,0	3,0	28,0	100	B	135,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70


S32HA48 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S32HA480	BLACK	10 M	1
S32HA481	BLACK	20 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C352	52 X 2	52 X 2 X 24 (0,22 MM²)	28 X 0,10	1,0	3,0	29,0	100	B	149,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

S32HA52 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S32HA520	BLACK	10 M	1
S32HA521	BLACK	20 M	1



# Multicore Cables

## Digital Audio AES/EBU Cables: Cable Tasker TSK812

Connectors: 12x Neutrik NC3FD - Stagebox 12 Inputs - LK37




### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wire:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering 100%  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Digital Audio AES/EBU Cables: Cable Tasker TSK812

Connectors: 12x Neutrik NC3FD - Stagebox 12 Inputs - Harting D42 (top or side entry)

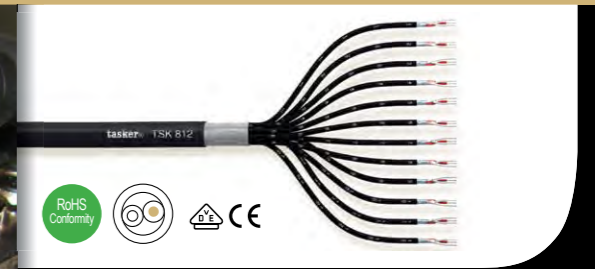

### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wire:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering 100%  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

### APPLICATIONS


Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		mm <sup>2</sup>	mm.	Ø mm.	Ø mm.	Ø mm.	mt.	Type	Kg.
TSK 812	12 X 2	12 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	15,6	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	3 MHz	8 MHz
140	50	100	80	110	-15/+70	7,5	11,0

A212LK BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
A212LK10	BLACK	10 M	1
A212LK20	BLACK	20 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		mm <sup>2</sup>	mm.	Ø mm.	Ø mm.	Ø mm.	mt.	Type	Kg.
TSK 812	12 X 2	12 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	15,6	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	3 MHz	8 MHz
140	50	100	80	110	-15/+70	7,5	11,0

A212LKD BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
A212LKD1	BLACK	10 M	1
A212LKD2	BLACK	20 M	1



# Multicore Cables

## Digital Audio AES/EBU Cables: Cable Tasker TSK816

Connectors: 16x Neutrik NC3FD - Stagebox 16 Inputs - LK54




### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wire:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering 100%  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Digital Audio AES/ABU Cables: Cable Tasker TSK816

Connectors: 16x Neutrik NC3FD - Stagebox 16 Inputs - Harting D72 (top or side entry)

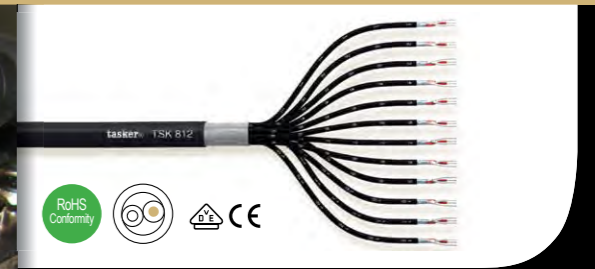

### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wire:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering 100%  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

### APPLICATIONS

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 816	16 X 2	16 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	17,9	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		

S212LK.E BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S212LK1E	BLACK	10 M	1
S212LK2E	BLACK	20 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 816	16 X 2	16 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	17,9	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		

A212LKD BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S212DK.E	BLACK	10 M	1
S212DK2E	BLACK	20 M	1



# Multicore Cables

Digital Audio AES/EBU Cables: Cable Tasker TSK816

Connectors: 12x Neutrik NC3FD +

4x Neutrik NC3MD - Stagebox 12 In/ 4 Outputs - Harting D72 (top or side entry)




**CHARACTERISTICS**

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wire:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

Digital Audio AES/EBU Cables: Cable Tasker TSK824

Connectors: 20x Neutrik NC3FD + 4x Neutrik NC3MD - Stagebox 20 In/ 4 Outputs - LK85

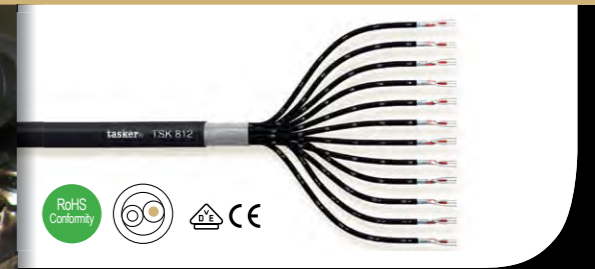

**CHARACTERISTICS**

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wire:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

**APPLICATIONS**

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/ EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

**APPLICATIONS**

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/ EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.


TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 816	16 X 2	16 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	17,9	100	B	

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 824	24 X 2	24 X 2 X 0,14 (26 AWG)	24 X 0,10	1,2	3,2	22,7	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	3 MHz	8 MHz
140	50	100	80	110	-15/+70	7,5	11,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	3 MHz	8 MHz
140	50	100	80	110	-15/+70	7,5	11,0

S21XDK.E BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S21XDK1E	BLACK	10 M	1
S21XDK2E	BLACK	20 M	1



S2CXDK.E BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S2CXDK1E	BLACK	10 M	1
S2CXDK2E	BLACK	20 M	1



# Multicore Cables

Digital Audio AES/EBU Cables: Cable Tasker TSK824

Connectors: 20x Neutrik NC3FD +

4x Neutrik NC3MD - Stagebox 20 In/ 4 Outputs - Harting D72 (top or side entry)




**CHARACTERISTICS**

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wire:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering 100%  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

Digital Audio AES/EBU Cables: Cable Tasker TSK824

Connectors: 24x Neutrik NC3FD - Stagebox 24 Inputs - Harting D72 (top or side entry)

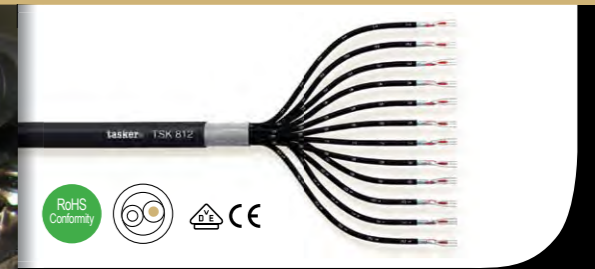

**CHARACTERISTICS**

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wire:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering 100%  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

**APPLICATIONS**

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

**APPLICATIONS**

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 824	24 X 2	24 X 2 X 0,14 (26 AWG)	24 X 0,10	1,2	3,2	22,7	100	B	

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 824	24 X 2	24 X 2 X 0,14 (26 AWG)	24 X 0,10	1,2	3,2	22,7	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		

S24XDK.E BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S24XDK1E	BLACK	10 M	1
S24XDK2E	BLACK	20 M	1



S24XAK.E BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S24XAK1E	BLACK	10 M	1
S24XAK2E	BLACK	20 M	1



Multicore Cables: Stage Box Digital

Multicore Cables: Stage Box Digital

# Multicore Cables

## Digital Audio AES/EBU Cables: Cable Tasker TSK824

Connectors: 24x Neutrik NC3FD - Stagebox 24 Inputs - LK85




**CHARACTERISTICS**

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wire:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering 100%  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Cable Tasker C304

Connectors: 4x Neutrik NC3MXX – 4x Neutrik NC3FXX

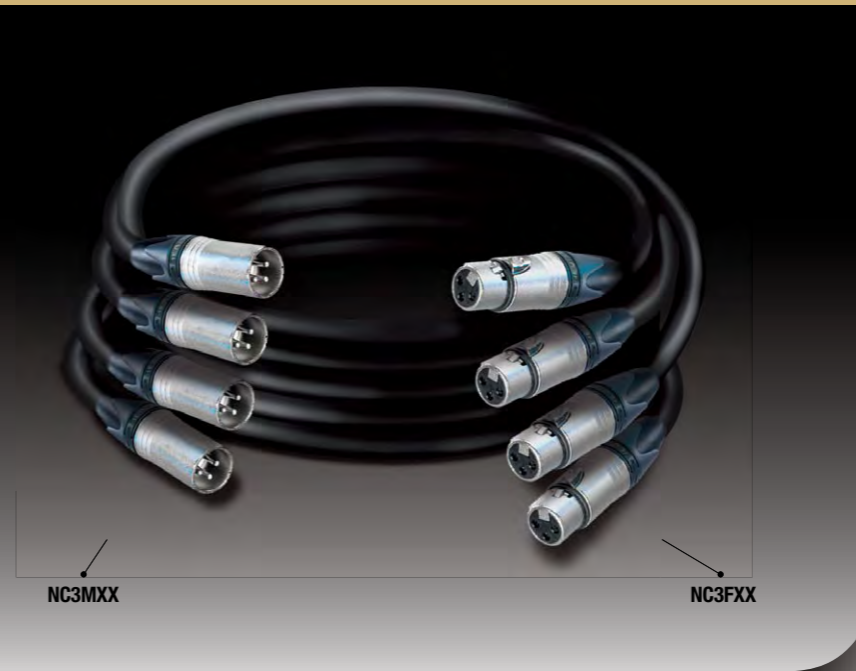

**CHARACTERISTICS** Conductors: Cond. insulation: Pair colours: Drain wire: Pair Shields: 100% Inner sheaths: Ins. colours: Drain wire: Total Shield: Total Sheath: Sheath colour:

**APPLICATIONS**

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisoquets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 824	24 X 2	24 X 2 X 0,14 (26 AWG)	24 X 0,10	1,2	3,2	22,7	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	3 MHz	8 MHz
140	50	100	80	110	-15/+70	7,5	11,0

S24XAE.E BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S24XAE1E	BLACK	10 M	1
S24XAE1E	BLACK	20 M	1



**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C304	4 X 2	4 X 2 X 24 (0,22 MM²)	28 X 0,10	1,0	3,0	11,0	100	B	19,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

MNNX3B BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MNNX3B1	BLACK	1,0 M	1
MNNX3B3	BLACK	3 M	1
MNNX3B6	BLACK	6 M	1
MNNX3B9	BLACK	9 M	1
MNNX3B12	BLACK	12 M	1



# Multicore Cables

## Balanced Microphone Cables: Cable Tasker C304

Connectors: 4x Neutrik NC3MXX-BAG – 4x Neutrik NC3FXX-BAG



**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Connectors:



**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

**APPLICATIONS**  
 Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C304	4 X 2	4 X 2 X 24 (0,22 MM²)	28 X 0,10	1,0	3,0	11,0	100	B	19,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

MNNX34 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MNNX341	BLACK	1,0 M	1
MNNX343	BLACK	3 M	1
MNNX346	BLACK	6 M	1
MNNX349	BLACK	9 M	1
MNNX3412	BLACK	12 M	1



**APPLICATIONS**  
 Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

MNNX38 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MNNX381	BLACK	1,0 M	1
MNNX383	BLACK	3 M	1
MNNX386	BLACK	6 M	1
MNNX389	BLACK	9 M	1
MNNX3812	BLACK	12 M	1



# Multicore Cables

## Balanced Microphone Cables: Cable Tasker C308

Connectors: 8x Neutrik NC3MXX-BAG – 8x Neutrik NC3FXX-BAG



**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Cable Tasker C308

Connectors: 8x Neutrik NP3X – 8x Neutrik NC3FXX, for Tascam, Yamaha, Mackie



**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

**APPLICATIONS**  
 Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C308	8 X 2	8 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	13,0	100	B	29,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

MNNX38 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MNNX3811	BLACK	1,0 M	1
MNNX3813	BLACK	3 M	1
MNNX3816	BLACK	6 M	1
MNNX3819	BLACK	9 M	1
MNNX38112	BLACK	12 M	1



**APPLICATIONS**  
 Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C308	8 X 2	8 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	13,0	100	B	29,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

MN3X38 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MN3X381	BLACK	1,0 M	1
MN3X383	BLACK	3 M	1
MN3X386	BLACK	6 M	1
MN3X389	BLACK	9 M	1
MN3X3812	BLACK	12 M	1



# Multicore Cables

## Balanced Microphone Cables: Cable Tasker C308

Connectors: 8x Neutrik NP3X – 8x Neutrik NC3MXX



### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Cable Tasker C308

Connectors: 8x Neutrik NP3X – 8x Neutrik NP3X



### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

### APPLICATIONS


Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C308	8 X 2	8 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	13,0	100	B	29,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

M83X38 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
M83X381	BLACK	1,0 M	1
M83X383	BLACK	3 M	1
M83X386	BLACK	6 M	1
M83X389	BLACK	9 M	1
M83X3812	BLACK	12 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C308	8 X 2	8 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	13,0	100	B	29,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70


M88XX38 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
M88X381	BLACK	1,0 M	1
M88X383	BLACK	3 M	1
M88X386	BLACK	6 M	1
M88X389	BLACK	9 M	1
M88X3812	BLACK	12 M	1



# Multicore Cables

## Digital Audio AES/EBU Cables: Cable Tasker TSK802

Connectors: 1x Neutrik NC3MXX + 1x NC3FXX – 1x Neutrik NC3FXX + 1x NC3MXX

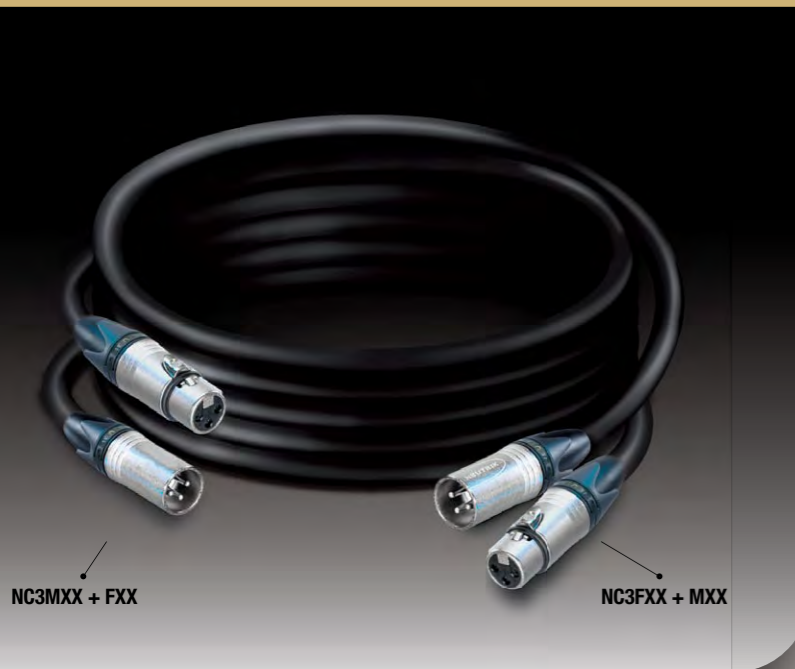


### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Digital Audio AES/EBU Cables: Cable Tasker TSK804

Connectors: 2x Neutrik NC3MXX + 1x NC3FXX - 2x Neutrik NC3FXX + 1x NC3MXX

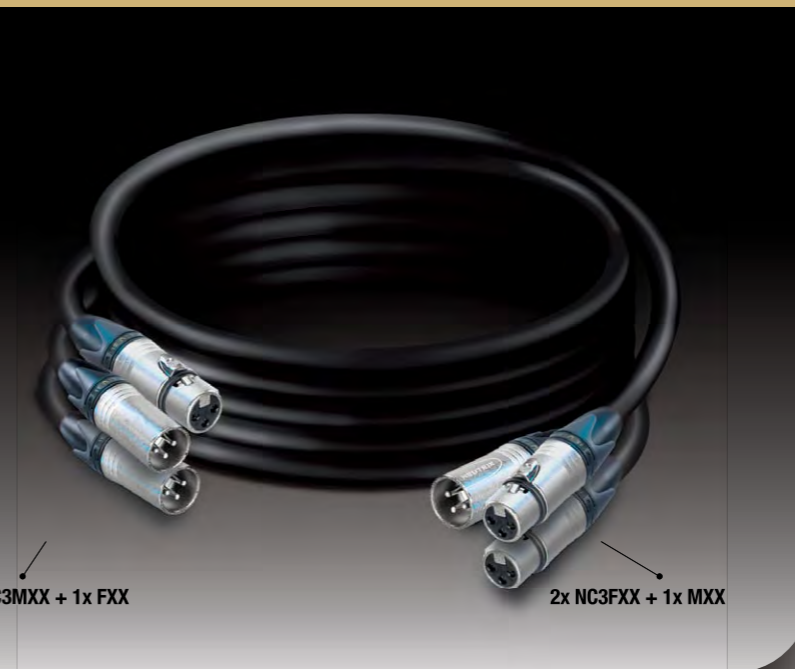

### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS


Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 802	2 X 2	2 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	8,8	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		

M22X38 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
M22X381	BLACK	1,0 M	1
M22X383	BLACK	3 M	1
M22X386	BLACK	6 M	1
M22X389	BLACK	9 M	1
M22X3812	BLACK	12 M	1



### APPLICATIONS


Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 804	4 X 2	4 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	10,3	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		

M24T38 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
M24T381	BLACK	1,0 M	1
M24T383	BLACK	3 M	1
M24T386	BLACK	6 M	1
M24T389	BLACK	9 M	1
M24T3812	BLACK	12 M	1



# Multicore Cables

## Digital Audio AES/EBU Cables: Cable Tasker TSK804

Connectors: 3x Neutrik NC3MXX – Sub D9 Male, for Lawo Z4 Mini Mixer



### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Digital Audio AES/EBU Cables: Cable Tasker TSK804

Connectors: 4x Neutrik NC3MXX – Sub D15 Male, for Lawo Z4 Mini Mixer



### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS


Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 804	4 X 2	4 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	10,3	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		

L9FM15 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
L9FM151	BLACK	1,0 M	1
L9FM153	BLACK	3 M	1
L9FM156	BLACK	6 M	1
L9FM159	BLACK	9 M	1
L9FM1512	BLACK	12 M	1



### APPLICATIONS


Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 804	4 X 2	4 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	10,3	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		


LMFM15 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
LMFM151	BLACK	1,0 M	1
LMFM153	BLACK	3 M	1
LMFM156	BLACK	6 M	1
LMFM159	BLACK	9 M	1
LMFM1512	BLACK	12 M	1



# Multicore Cables

## Digital Audio AES/EBU Cables: Cable Tasker TSK808

Connectors: 8x Neutrik NP3X – Sub D25 Male, for Tascam, Yamaha, Mackie

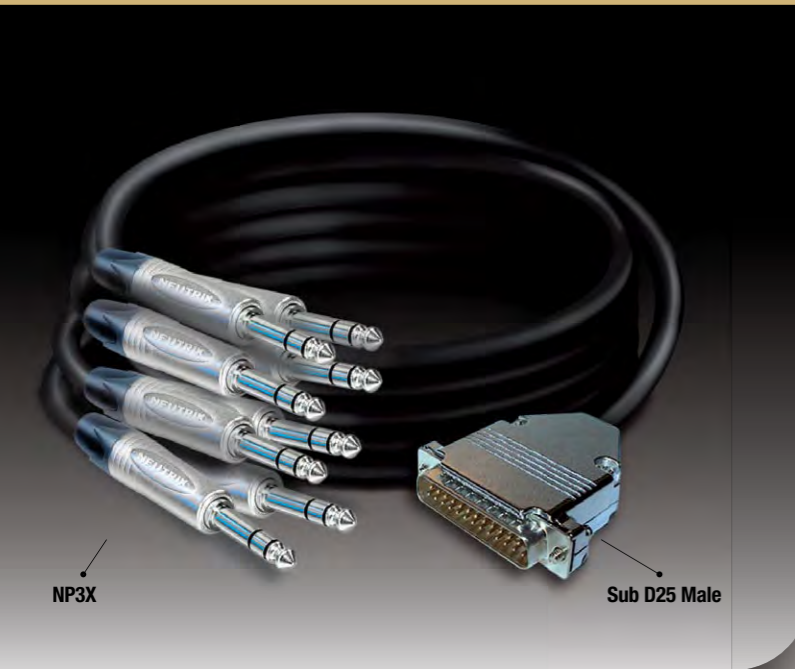


### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Digital Audio AES/EBU Cables: Cable Tasker TSK808

Connectors: 8x Neutrik NC3FFX – Sub D25 Male, for Tascam, Yamaha

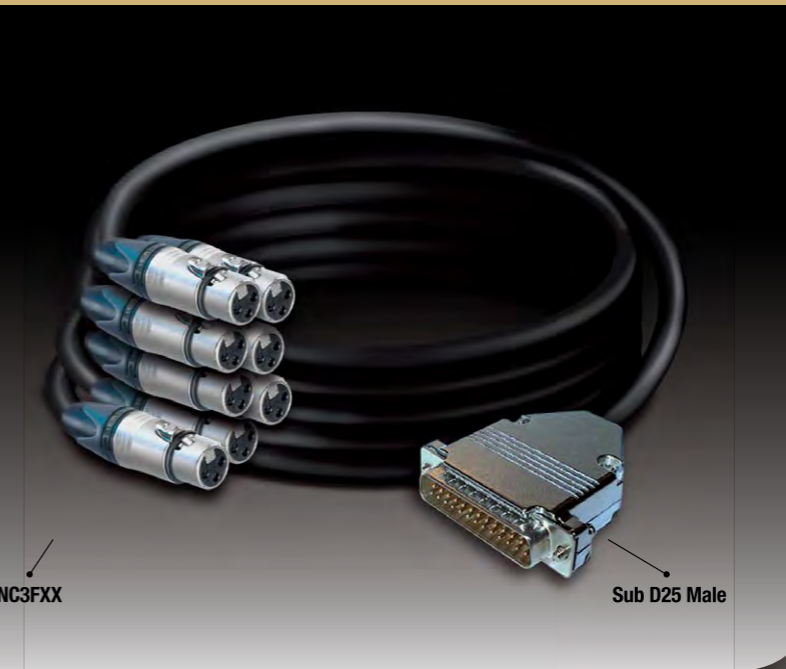

### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 808	8 X 2	8 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	12,9	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		

MD4T38 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MD4T381	BLACK	1,0 M	1
MD4T383	BLACK	3 M	1
MD4T386	BLACK	6 M	1
MD4T389	BLACK	9 M	1
MD4T3812	BLACK	12 M	1



### APPLICATIONS

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 808	8 X 2	8 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	12,9	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		


MDXT38 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MDXT381	BLACK	1,0 M	1
MDXT383	BLACK	3 M	1
MDXT386	BLACK	6 M	1
MDXT389	BLACK	9 M	1
MDXT3812	BLACK	12 M	1



# Multicore Cables

## Digital Audio AES/EBU Cables: Cable Tasker TSK808

Connectors: 8x Neutrik NC3MXX – Sub D25 Male, for Tascam, Yamaha, Mackie, Focusrite

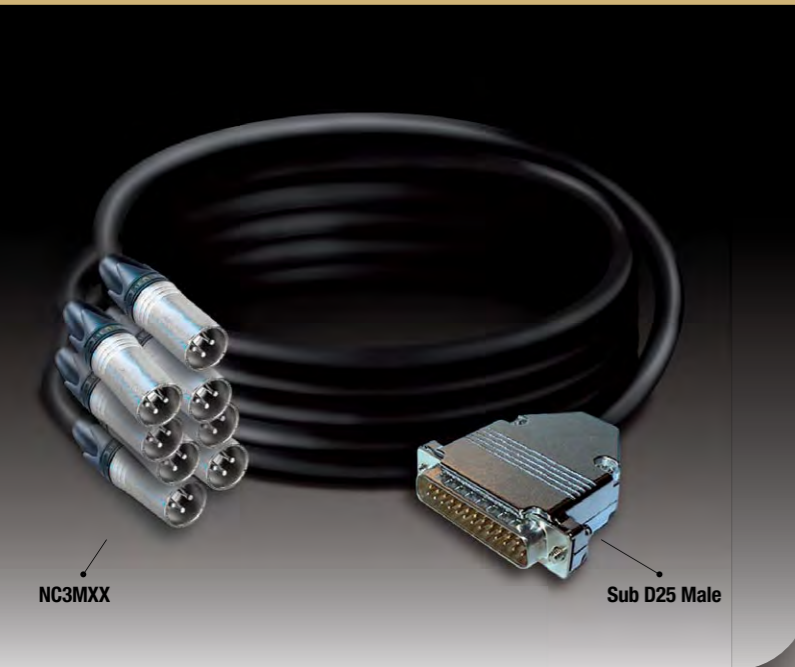

### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Digital Audio AES/EBU Cables: Cable Tasker TSK808

Connectors: 2x Sub D25 Male, for Tascam, Yamaha, Mackie, Focusrite



### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS


Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 808	8 X 2	8 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	12,9	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		

MDMT38 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MDMT381	BLACK	1,0 M	1
MDMT383	BLACK	3 M	1
MDMT386	BLACK	6 M	1
MDMT389	BLACK	9 M	1
MDMT3812	BLACK	12 M	1



### APPLICATIONS


Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 808	8 X 2	8 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	12,9	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		


MDMM38 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
MDMM381	BLACK	1,0 M	1
MDMM383	BLACK	3 M	1
MDMM386	BLACK	6 M	1
MDMM389	BLACK	9 M	1
MDMM3812	BLACK	12 M	1



# Multicore Cables

## Digital Audio AES/EBU Cables: Cable Tasker TSK808

Connectors: 4x Neutrik NC3MXX + 4x Neutrik NC3FXX – Sub D25 Male, for Tascam, Yamaha

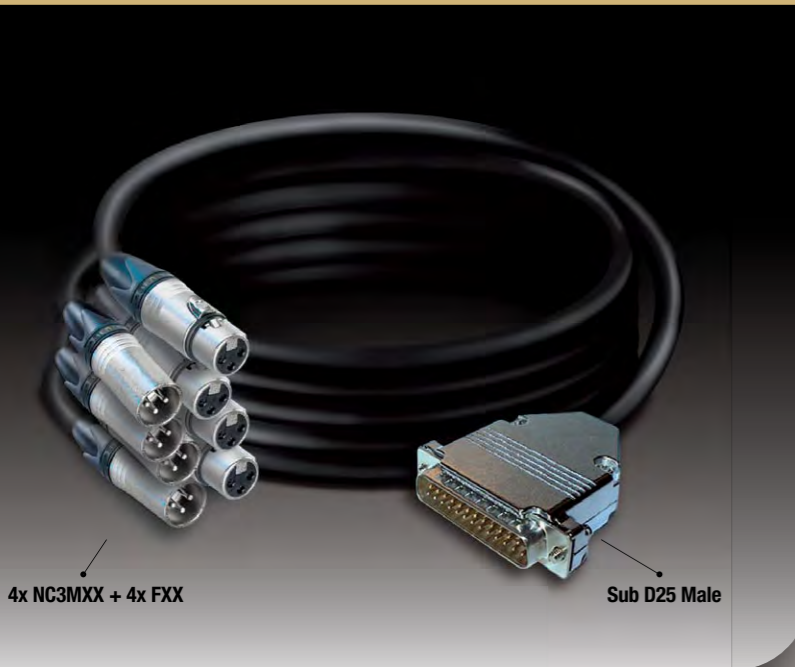


### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Digital Audio AES/EBU Cables: Cable Tasker TSK804

Connectors: 4x Neutrik NC3FXX – Sub D15 Male, for Lawo Z4 Mini Mixer

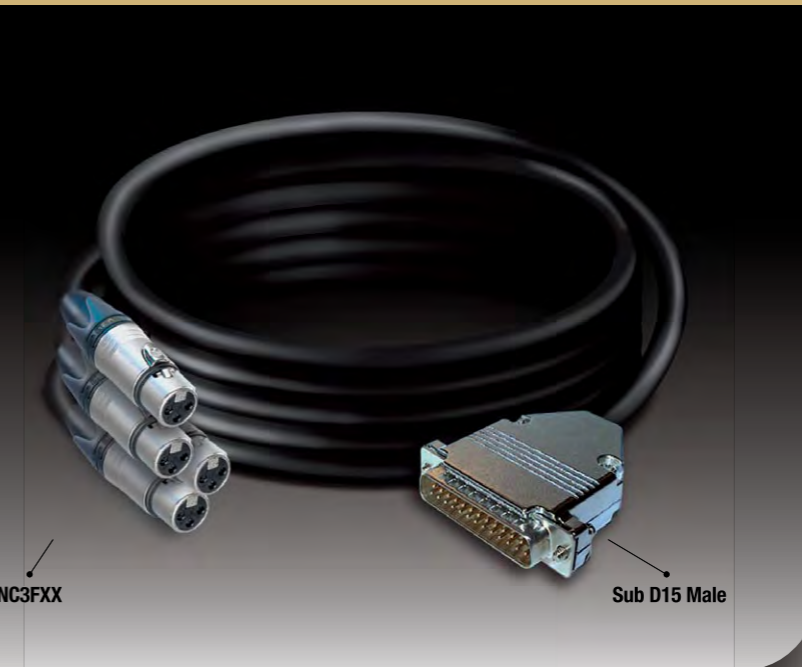

### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS


Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 808	8 X 2	8 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	12,9	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		

TMFY38 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
TMFY381	BLACK	1,0 M	1
TMFY383	BLACK	3 M	1
TMFY386	BLACK	6 M	1
TMFY389	BLACK	9 M	1
TMFY3812	BLACK	12 M	1



### APPLICATIONS


Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 804	4 X 2	4 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	10,3	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		

L9FM45 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
L9FM451	BLACK	1,0 M	1
L9FM453	BLACK	3 M	1
L9FM456	BLACK	6 M	1
L9FM459	BLACK	9 M	1
L9FM4512	BLACK	12 M	1



# Multicore Cables

## Balanced Microphone Cables: Cable Tasker C324

Connectors: 20x Neutrik NC3MXX – Harting D72 (top or side entry)



### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. Insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Cable Tasker C324

Connectors: 20x Neutrik NC3FXX – Harting D72 (top or side entry)



### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. Insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS


Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL		
							mt.	Type	Kg.
C324	24 X 2	24 X 2 X 24 (0,22 mm²)	28 X 0,10	1,0	3,0	20,0	100	B	77,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

A324M20 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
A324M205	BLACK	1,5 M	1
A324M204	BLACK	3 M	1
A324M201	BLACK	5 M	1
A324M202	BLACK	10 M	1
A324M203	BLACK	20 M	1



### APPLICATIONS


Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL		
							mt.	Type	Kg.
C324	24 X 2	24 X 2 X 24 (0,22 mm²)	28 X 0,10	1,0	3,0	20,0	100	B	77,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

A324AF0 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
A324AF05	BLACK	1,5 M	1
A324AF04	BLACK	3 M	1
A324AF01	BLACK	5 M	1
A324AF02	BLACK	10 M	1
A324AF03	BLACK	20 M	1



# Multicore Cables

## Digital Audio AES/EBU Cables: Cable Tasker TSK824

Connectors: 20x Neutrik NC3MXX – Harting D72 (top or side entry)



### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering 100%  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Digital Audio AES/EBU Cables: Cable Tasker TSK824

Connectors: 20x Neutrik NC3FXX – Harting D72 (top or side entry)



### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering 100%  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification.

The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:

- O.F.C. copper with high conductivity and aging resistant.
- Low capacity and attenuation on long distances.
- The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

### APPLICATIONS

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification.

The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.


The main characteristics of this cables are:

- O.F.C. copper with high conductivity and aging resistant.
- Low capacity and attenuation on long distances.
- The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 824	24 X 2	24 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	22,7	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		

D324A20 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
D324A205	BLACK	1,5 M	1
D324A204	BLACK	3 M	1
D324A201	BLACK	5 M	1
D324A202	BLACK	10 M	1
D324A203	BLACK	20 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 824	24 X 2	24 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	22,7	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		

D324AF0 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
D324AF05	BLACK	1,5 M	1
D324AF04	BLACK	3 M	1
D324AF01	BLACK	5 M	1
D324AF02	BLACK	10 M	1
D324AF03	BLACK	20 M	1



# Multicore Cables

Digital Audio AES/EBU Cables: Cable Tasker TSK812

Connectors: LK37 male or female – LK37 male or female



**CHARACTERISTICS**

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

Digital Audio AES/EBU Cables: Cable Tasker TSK812

Connectors: LK37 male or female – LK37 male or female – Cable Drum Schill



**CHARACTERISTICS**

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

**APPLICATIONS**

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

**APPLICATIONS**

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	Ø mm.	Ø mm.	mt.	Type	Kg.
TSK 812	12 X 2	12 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	15,6	100	B	

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	Ø mm.	Ø mm.	mt.	Type	Kg.
TSK 812	12 X 2	12 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	15,6	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	3 MHz	8 MHz
140	50	100	80	110	-15/+70	7,5	11,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	3 MHz	8 MHz
140	50	100	80	110	-15/+70	7,5	11,0

LK37DI BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
LK37DI6	BLACK	6 M	1
LK37DI12	BLACK	12 M	1
LK37DI24	BLACK	24 M	1
LK37DI36	BLACK	36 M	1



SHAC BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SHAC50	BLACK	50 M	1
SHAC10	BLACK	100 M	1



Multicore Cables: Analogue/Digital LK Connectors

Multicore Cables: Analogue/Digital LK Connectors

# Multicore Cables

## Balanced Microphone Cables: Cable Tasker C312

Connectors: LK37 male or female – LK37 male or female



**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Cable Tasker C312

Connectors: LK37 male or female – LK37 male or female – Cable Drum Schill



**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C312	12 X 2	12 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	16,0	100	B	45,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

LK37LK BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
LK37LK6	BLACK	6 M	1
LK37LK12	BLACK	12 M	1
LK37LK24	BLACK	24 M	1
LK37LK36	BLACK	36 M	1



### APPLICATIONS

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C312	12 X 2	12 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	16,0	100	B	45,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

SHAC BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SHAC50	BLACK	50 M	1
SHAC10	BLACK	100 M	1



Multicore Cables: Analogue/Digital LK Connectors

Multicore Cables: Analogue/Digital LK Connectors

# Multicore Cables

Digital Audio AES/EBU Cables: Cable Tasker TSK824

Connectors: LK85 male or female – LK85 male or female



**CHARACTERISTICS**  
**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

Digital Audio AES/EBU Cables: Cable Tasker TSK824

Connectors: LK85 male or female – LK85 male or female – Cable Drum Schill



**CHARACTERISTICS**  
**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

**APPLICATIONS**

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 824	24 X 2	24 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	22,7	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		

ST24D BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
ST24D06	BLACK	6 M	1
ST24D12	BLACK	12 M	1
ST24D24	BLACK	24 M	1
ST24D36	BLACK	36 M	1



**APPLICATIONS**

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 824	24 X 2	24 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	22,7	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		

SULK3 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SULK350	BLACK	50 M	1
SULK310	BLACK	100 M	1



# Multicore Cables

## Balanced Microphone Cables: Cable Tasker C324

Connectors: LK85 male or female – LK85 male or female



**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. Insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Cable Tasker C324

Connectors: LK85 male or female – LK85 male or female – Cable Drum Schill



**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. Insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS


Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL		
							mt.	Type	Kg.
C324	24 X 2	24 X 2 X 24 (0,22 mm <sup>2</sup> )	28 X 0,10	1,0	3,0	20,0	100	B	77,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

SA240 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SA24D06	BLACK	6 M	1
SA24D12	BLACK	12 M	1
SA24D24	BLACK	24 M	1
SA24D36	BLACK	36 M	1



### APPLICATIONS


Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL		
							mt.	Type	Kg.
C324	24 X 2	24 X 2 X 24 (0,22 mm <sup>2</sup> )	28 X 0,10	1,0	3,0	20,0	100	B	77,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

SALK3 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SALK350	BLACK	50 M	1
SALK310	BLACK	100 M	1



Multicore Cables: Analogue/Digital LK Connectors

Multicore Cables: Analogue/Digital LK Connectors

# Multicore Cables

## Balanced Microphone Cables: Cable Tasker C336

Connectors: LK150 male or female – LK150 male or female



**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. Insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Cable Tasker C348

Connectors: LK150 male or female – LK150 male or female



**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. Insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL		
							mt.	Type	Kg.
C336	36 X 2	36 X 2 X 24 (0,22 mm²)	28 X 0,10	1,0	3,0	26,0	100	B	105,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

FU36A BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
FU36A06	BLACK	6 M	1
FU36A12	BLACK	12 M	1
FU36A24	BLACK	24 M	1
FU36A36	BLACK	36 M	1



### APPLICATIONS

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL		
							mt.	Type	Kg.
C348	48 X 2	48 X 2 X 24 (0,22 mm²)	28 X 0,10	1,0	3,0	28,0	100	B	135,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

SF48C BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SF48C06	BLACK	6 M	1
SF48C12	BLACK	12 M	1
SF48C24	BLACK	24 M	1
SF48C36	BLACK	36 M	1



# Multicore Cables

## Balanced Microphone Cables: Cable Tasker C336

Connectors: LK150 male or female – LK150 male or female – Cable Drum Schill



**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. Insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Cable Tasker C348

Connectors: LK150 male or female – LK150 male or female – Cable Drum Schill



**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. Insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C336	36 X 2	36 X 2 X 24 (0,22 mm <sup>2</sup> )	28 X 0,10	1,0	3,0	26,0	100	B	105,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

SF36C BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SF36C06	BLACK	50 M	1
SF36C12	BLACK	100 M	1



### APPLICATIONS

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C348	48 X 2	48 X 2 X 24 (0,22 mm <sup>2</sup> )	28 X 0,10	1,0	3,0	28,0	100	B	135,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

SF48F BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SF48F050	BLACK	50 M	1
SF48F100	BLACK	100 M	1



Multicore Cables: Analogue/Digital LK Connectors

Multicore Cables: Analogue/Digital LK Connectors

# Multicore Cables

## Digital Audio AES/EBU Cables: Cable Tasker TSK812

Connectors: Harting D42 male or female – D42 male or female (top or side entry)



### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS


Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 812	12 X 2	12 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	15,6	100	B	



CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		

HD2FM BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HD2FM06	BLACK	6 M	1
HD2FM12	BLACK	12 M	1
HD2FM24	BLACK	24 M	1
HD2FM36	BLACK	36 M	1



## Digital Audio AES/EBU Cables: Cable Tasker TSK812

Connectors: Harting D42 male or female – D42 male or female (top or side entry) – Cable Drum Schill

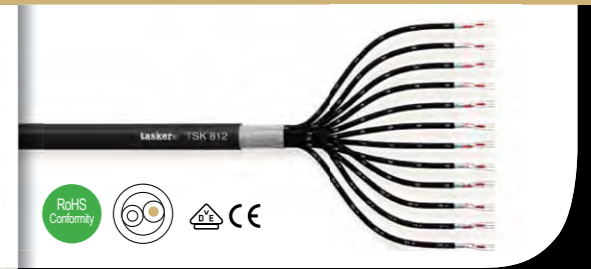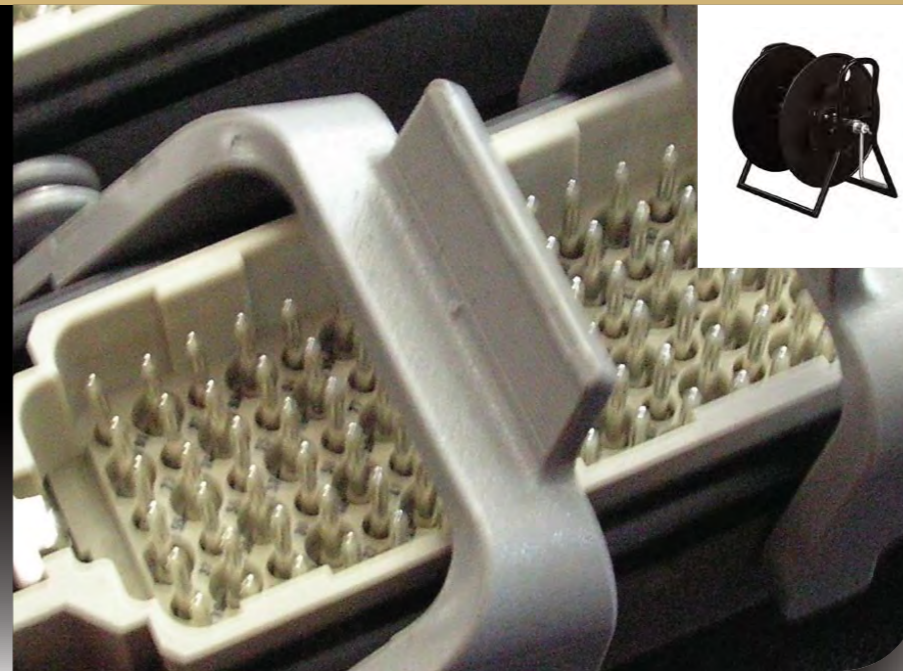

### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 812	12 X 2	12 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	15,6	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		


FEFM8 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
FEFM850	BLACK	50 M	1
FEFM810	BLACK	100 M	1



# Multicore Cables

## Digital Audio AES/EBU Cables: Cable Tasker TSK812

Connectors: Harting D42 male or female (top or side entry) – D42 male or female chassis – Cable Drum Schill


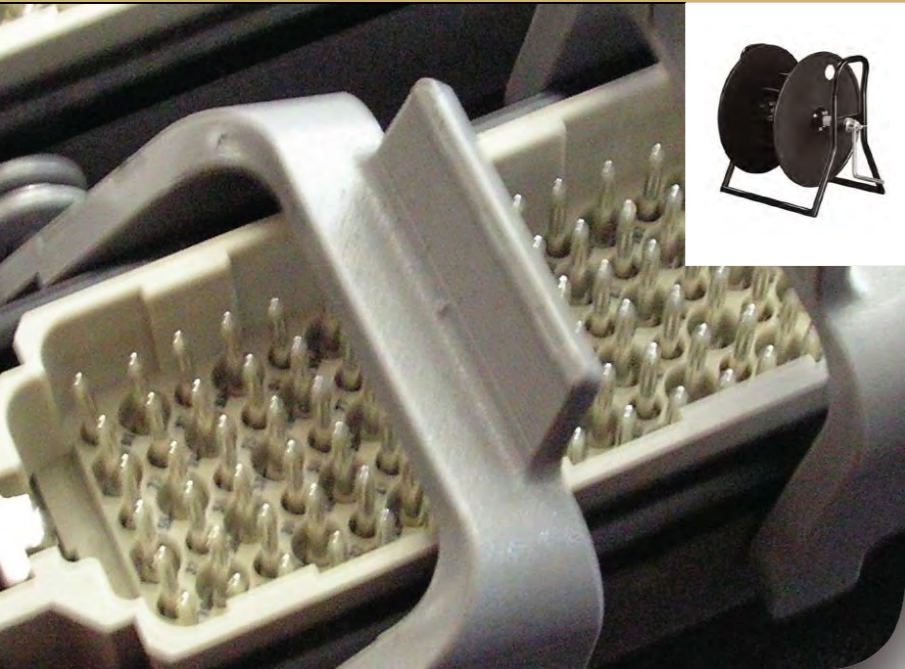


**CHARACTERISTICS**

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering 100%  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Cable Tasker C312

Connectors: Harting D42 male or female – Harting D42 male or female (top or side entry)

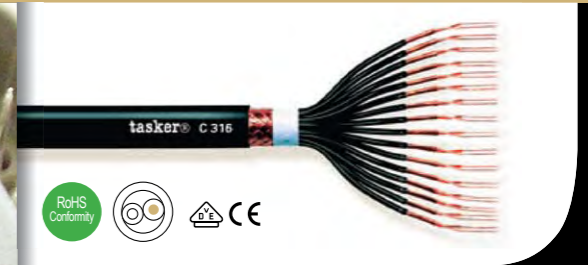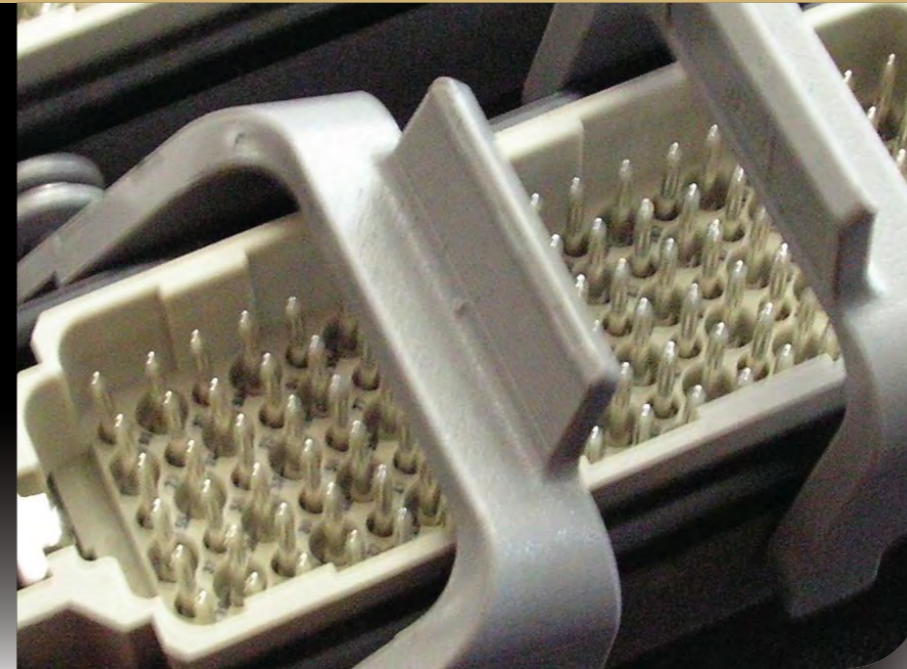

**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

**APPLICATIONS**

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
		mm <sup>2</sup>	mm.	Ø mm.	Ø mm.	Ø mm.	mt.	Type	Kg.
TSK 812	12 X 2	12 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	15,6	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	3 MHz	8 MHz
140	50	100	80	110	-15/+70	7,5	11,0

HHFM8 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HHFM850	BLACK	50 M	1
HHFM8100	BLACK	100 M	1



**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C312	12 X 2	12 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	16,0	100	B	45,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

HH312 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HH31206	BLACK	6 M	1
HH31212	BLACK	12 M	1
HH31224	BLACK	24 M	1
HH31236	BLACK	36 M	1




Multicore Cables: Analogue/Digital Harting Connectors

Multicore Cables: Analogue/Digital Harting Connectors

# Multicore Cables

## Digital Audio AES/EBU Cables: Cable Tasker TSK824

Connectors: Connectors: Harting D72 male or female – D72 male or female (top or side entry)

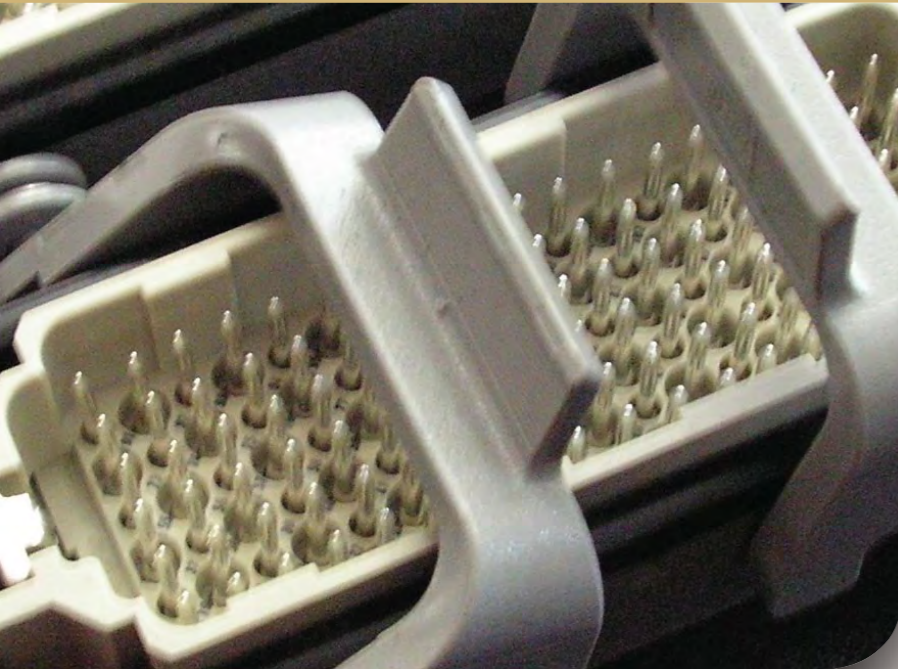

### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 824	24 X 2	24 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	22,7	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		

HHFM8 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HHFM856	BLACK	6 M	1
HHFM812	BLACK	12 M	1
HHFM824	BLACK	24 M	1
HHFM836	BLACK	36 M	1



## Digital Audio AES/EBU Cables: Cable Tasker TSK824

Connectors: Harting D72 male or female – D72 male or female (top or side entry) – Cable Drum Schill



### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering **100%**  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 824	24 X 2	24 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	22,7	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
						3 MHz	8 MHz
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	7,5	11,0
140	50	100	80	110	-15/+70		


HHDF BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HHDFS50	BLACK	50 M	1
HHDF100	BLACK	100 M	1



# Multicore Cables

## Digital Audio AES/EBU Cables: Cable Tasker TSK824

Connectors: Harting D72 male or female (top or side entry) – D72 male or female chassis – Cable Drum Schill

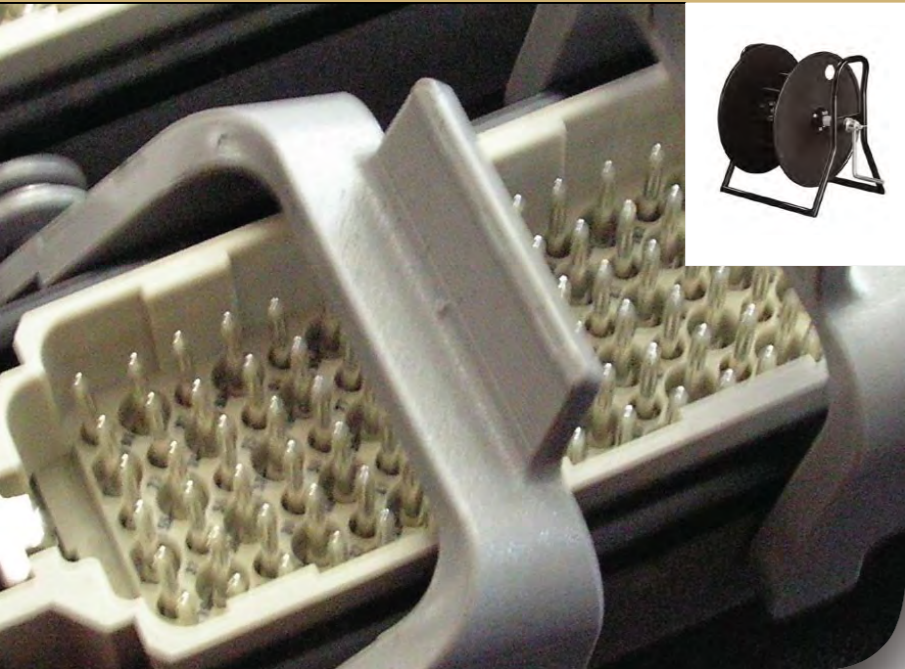


### CHARACTERISTICS

**Conductors:** O.F.C. tinned copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White, Red  
**Total tapes:** Polyester  
**Drain wires:** stranded in O.F.C. tinned copper  
**Shields:** Aluminium/Polyester tape covering 100%  
**Inner sheaths:** PVC  
**Insulat. colours:** Black and numbered  
**Total tape:** Unweaved Polyester  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Cable Tasker C324

Connectors: Harting D72 male or female – Harting D72 male or female (top or side entry)

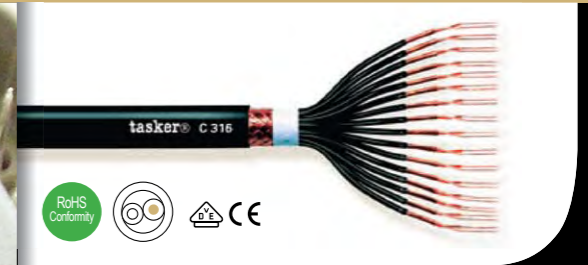

### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. Insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS

Extra Flexible Digital Audio Multipair Cables 110 Ω AES/EBU with smaller diameters for fixed or mobile laying for professional equipments and mixer instruments or direction benches and of sound amplification. The cables are suitable to the realization of extensions and digital audio balanced multisockets and use also like microphone multilines and of control for return direction.

The main characteristics of this cables are:  
 - O.F.C. copper with high conductivity and aging resistant.  
 - Low capacity and attenuation on long distances.  
 - The extreme flexibility and outer diameters for laying in pipes or pre-existing tubing installation.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
TSK 824	24 X 2	24 X 2 X 0,14 (26 AWG)	18 X 0,10	1,2	3,2	22,7	100	B	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	IMPEDANCE	OPERATIVE TEMPERATURE	ATTENUATION DB/100MT	
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	°C	3 MHz	8 MHz
140	50	100	80	110	-15/+70	7,5	11,0

HHFD8 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HHFD8S50	BLACK	50 M	1
HHFD8100	BLACK	100 M	1



### APPLICATIONS

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL		
							mt.	Type	Kg.
C324	24 X 2	24 X 2 X 24 (0,22 mm²)	28 X 0,10	1,0	3,0	20,0	100	B	77,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70


HHFA8 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HHFA856	BLACK	6 M	1
HHFA812	BLACK	12 M	1
HHFA824	BLACK	24 M	1
HHFA836	BLACK	36 M	1



# Multicore Cables

## Balanced Microphone Cables: Cable Tasker C324

Connectors: Harting D72 male or female – Harting D72 male or female (top or side entry) – Cable Drum Schill

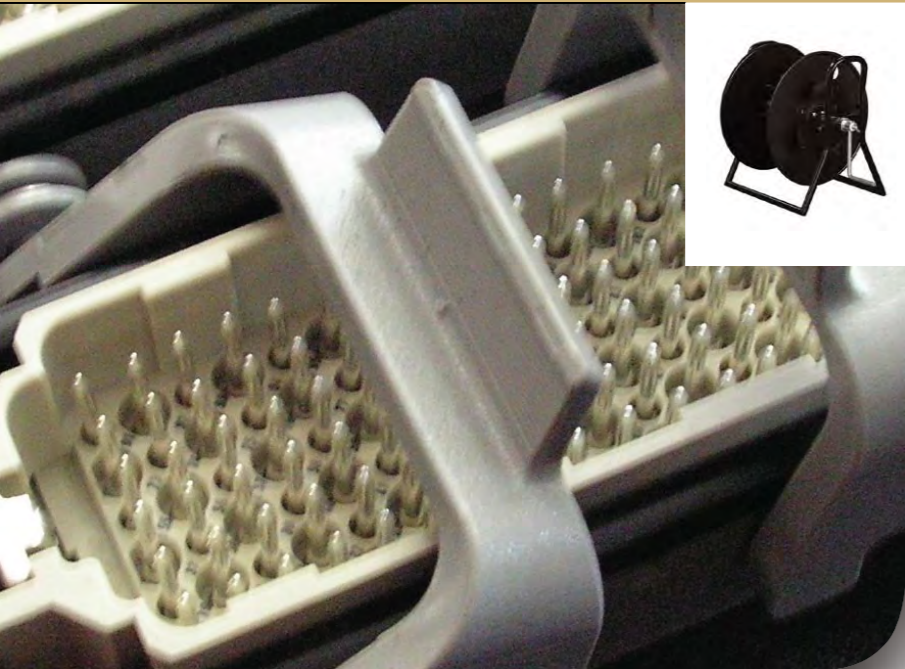


**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. Insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Cable Tasker C324 Connectors: Harting D72 male or female

(top or side entry) – Harting D72 male or female chassis – Cable Drum Schill

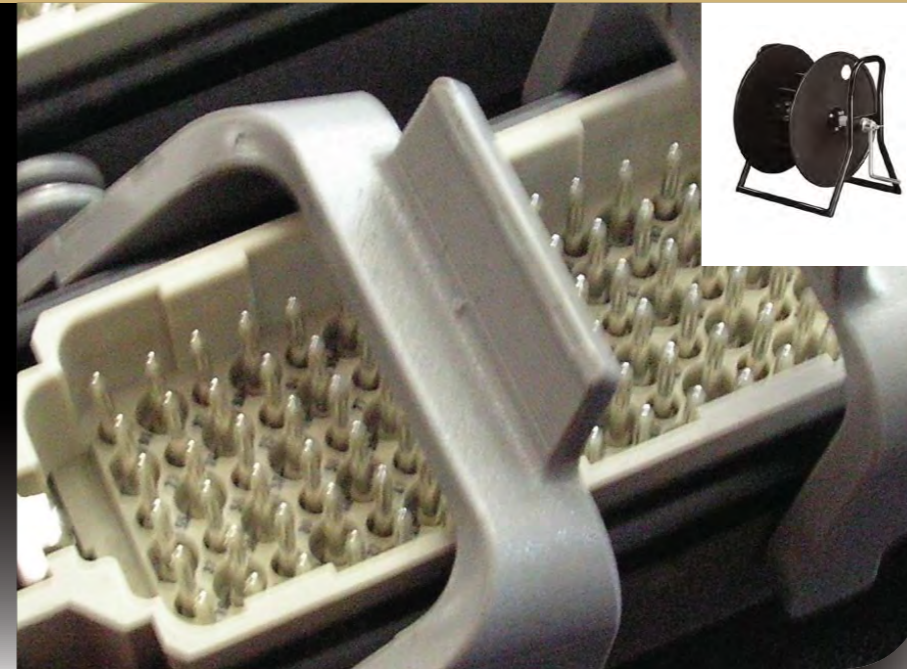

**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. Insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C324	24 X 2	24 X 2 X 24 (0,22 mm <sup>2</sup> )	28 X 0,10	1,0	3,0	20,0	100	B	77,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

HHFF8 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HHFF8S50	BLACK	50 M	1
HHFF8100	BLACK	100 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C324	24 X 2	24 X 2 X 24 (0,22 mm <sup>2</sup> )	28 X 0,10	1,0	3,0	20,0	100	B	77,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

HHFC8 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HHFC8S50	BLACK	50 M	1
HHFC8100	BLACK	100 M	1




Multicore Cables: Analogue/Digital Harting Connectors

Multicore Cables: Analogue/Digital Harting Connectors

# Multicore Cables

## Balanced Microphone Cables: Cable Tasker C336

Connectors: Harting D108 male or female – Harting D108 male or female (top or side entry)

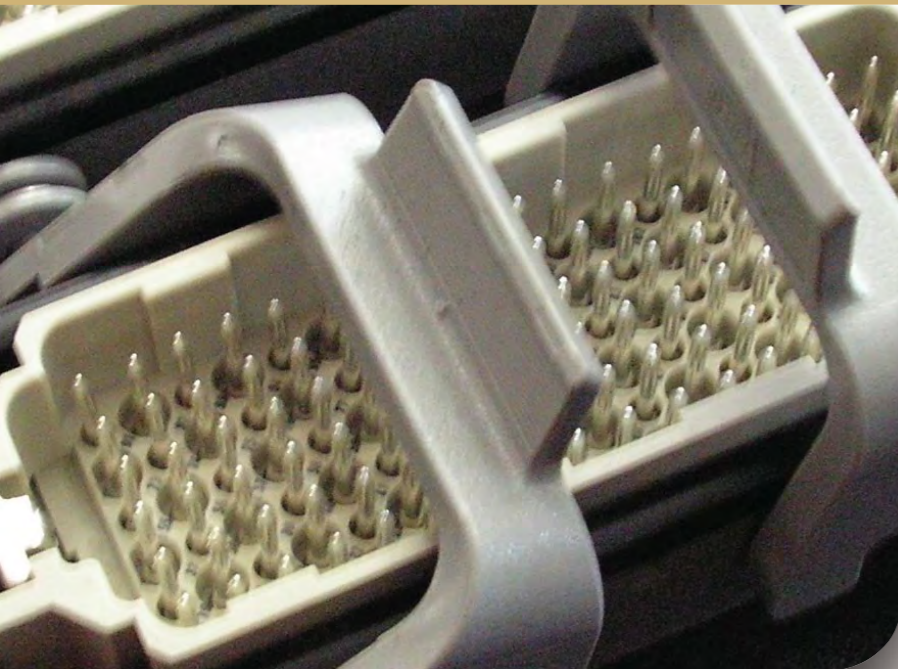


### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Cable Tasker C336

Connectors: Harting D108 male or female – Harting D108 male or female (top or side entry) – Cable Drum Schill

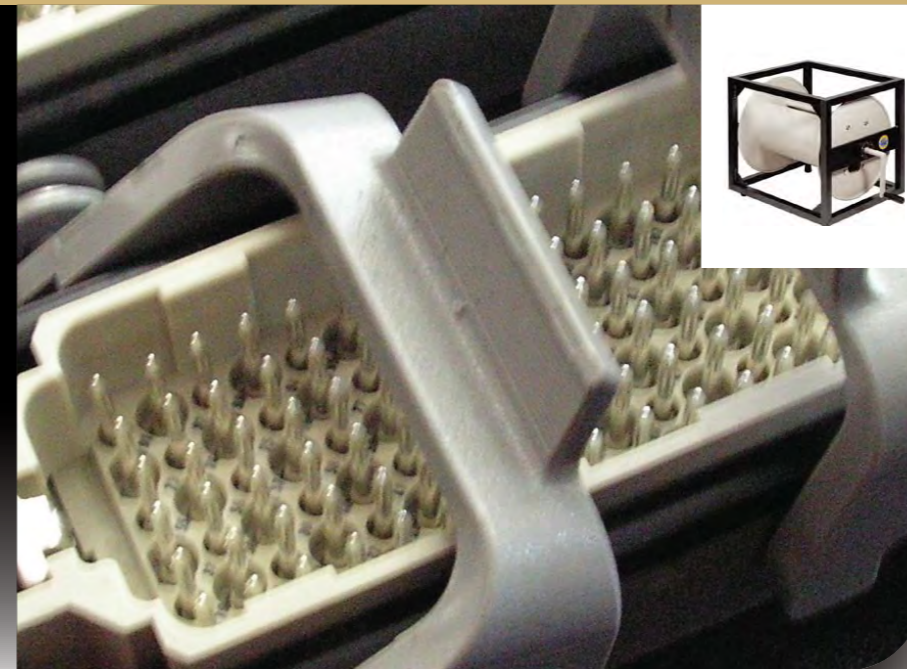

O.F.C. red copper  
 Solid PE  
 White, Red  
 O.F.C. tinned copper  
 Spiral covering O.F.C. red copper  
 PVC Black and numbered  
 O.F.C. tinned copper  
 Braided O.F.C. red copper covering 85%  
 PVC  
 Black

### APPLICATIONS

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

### APPLICATIONS

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C336	36 X 2	36 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	26,0	100	B	105,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

HH336F BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HH336F06	BLACK	6 M	1
HH336F12	BLACK	12 M	1
HH336F24	BLACK	24 M	1
HH336F36	BLACK	36 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL		
							mt.	Type	Kg.
C336	36 X 2	36 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	26,0	100	B	105,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70


HHF336 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT



# Multicore Cables

**Balanced Microphone Cables: Cable Tasker C336** Connectors: Harting D108 male or female

(top or side entry) – Harting D108 male or female chassis – Cable Drum Schill

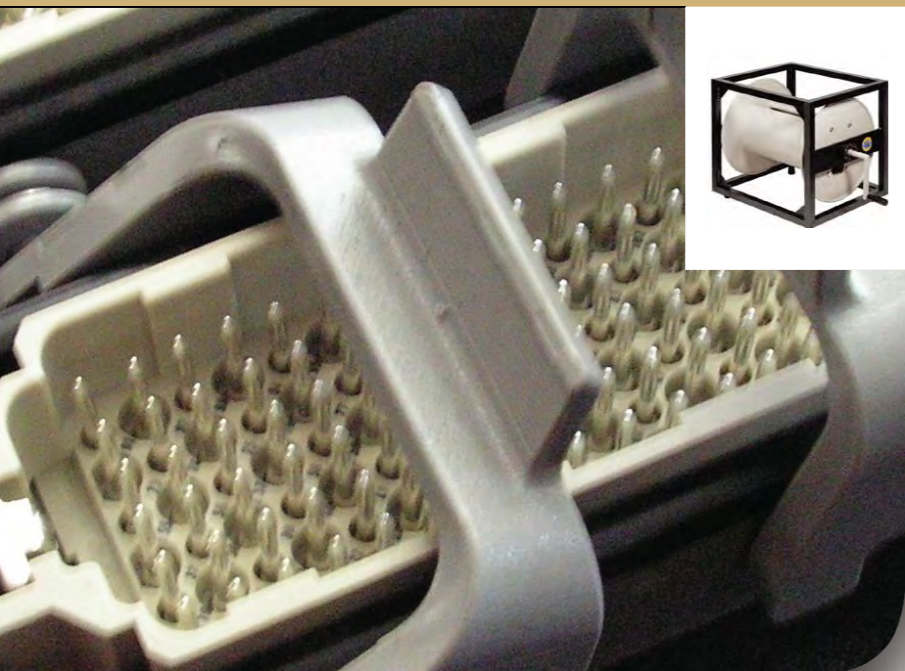


**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

**Balanced Microphone Cables: Cable Tasker C348**

**Connectors:** Connectors: Harting D108 male or female – Harting D108 male or female (top or side entry)

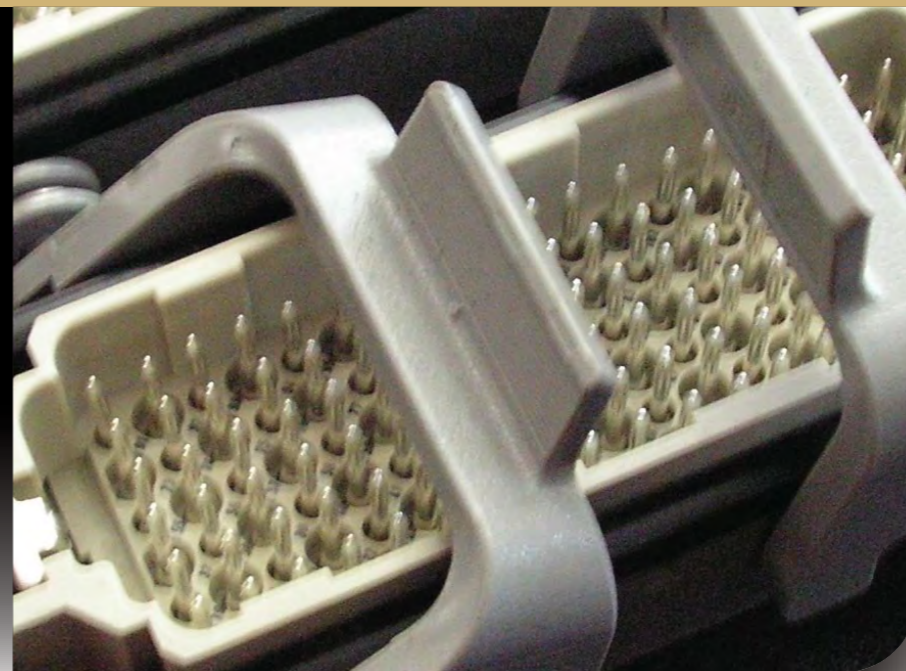

**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C336	36 X 2	36 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	26,0	100	B	105,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

1HHF336 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
1HHF33650	BLACK	50 M	1
1HHF33610	BLACK	100 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C348	48 X 2	48 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	28,0	100	B	135,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

HHF48 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HHF4806	BLACK	6 M	1
HHF4812	BLACK	12 M	1
HHF4824	BLACK	24 M	1
HHF4836	BLACK	36 M	1




Multicore Cables: Analogue/Digital Harting Connectors

Multicore Cables: Analogue/Digital Harting Connectors

# Multicore Cables


**Balanced Microphone Cables: Cable Tasker C348** Connectors: Harting D108 male or female – Harting D108 male or female (top or side entry) – Cable Drum Schill

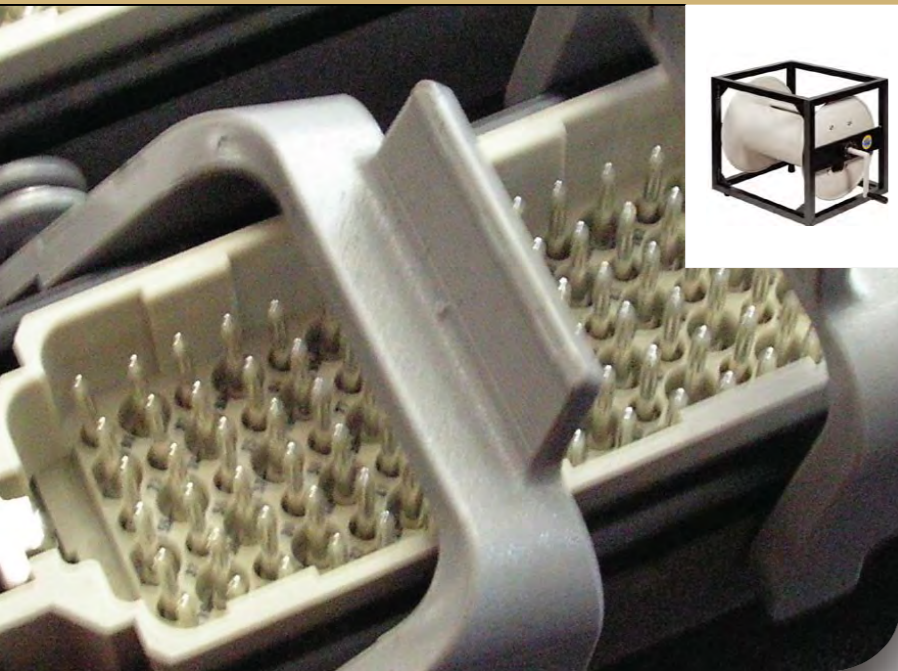

**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

**Balanced Microphone Cables: Cable Tasker C448** Connectors: Harting D144 male or female – Harting D144 male or female (top or side entry) – Cable Drum Schill

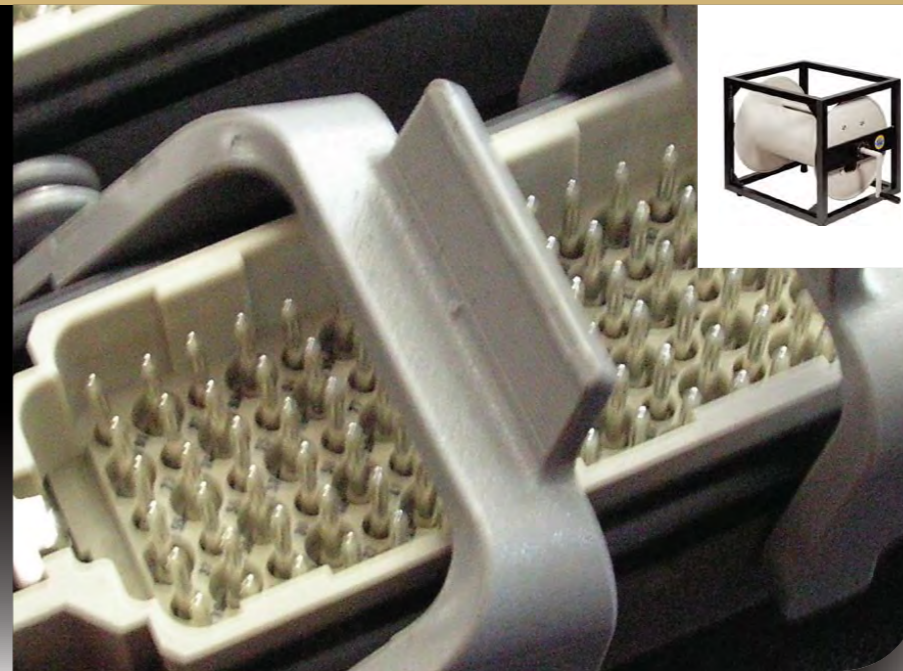

**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Total Sheath:** PVC  
**Sheath colour:** Black

**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C348	48 X 2	48 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	28,0	100	B	135,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

HHF4 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HHF4850	BLACK	50 M	1
HHF4100	BLACK	100 M	1



**APPLICATIONS**

Professional extra flex multipair cables with individually shielded and insulated pairs for mobile laying suitable for the realization of extensions or audio balanced multi-sockets or for connections of audio mixers and direction benches.

The flexibility and sturdiness give the possibility to wind and unwind the cable for several times without modifying the physical configuration and especially its technical features.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C448	48 X 2	48 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	27,0	100	B	115,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

HF348 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HF34850	BLACK	50 M	1
HF34810	BLACK	100 M	1



Multicore Cables: Analogue/Digital Harting Connectors

Multicore Cables: Analogue/Digital Harting Connectors

# Multicore Cables

**Balanced Microphone Cables: Cable Tasker C448 Connectors: Harting D144 male or female**

(top or side entry) – Harting D144 chassis male or female – Cable Drum Schill



**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Total Sheath:** PVC  
**Sheath colour:** Black

**Balanced Microphone Cables: Cable Tasker C352 Connectors: Harting D216 male or female**

(top or side entry) – Harting D216 chassis male or female – Cable Drum Schill



**CHARACTERISTICS**

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

**APPLICATIONS**


Professional extra flex multipair cables with individually shielded and insulated pairs for mobile laying suitable for the realization of extensions or audio balanced multi-sockets or for connections of audio mixers and direction benches.

The flexibility and sturdiness give the possibility to wind and unwind the cable for several times without modifying the physical configuration and especially its technical features.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C448	48 X 2	48 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	27,0	100	B	115,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

1HH312 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
1HHF34850	BLACK	50 M	1
1HHF34810	BLACK	100 M	1



**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C352	52 X 2	52 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	29,0	100	B	149,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

HHF528 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
HHF52850	BLACK	50 M	1
HHF52810	BLACK	100 M	1



Multicore Cables: Analogue/Digital Harting Connectors

Multicore Cables: Analogue/Digital Harting Connectors

# Multicore Cables

## Balanced Microphone Cables: Cable Tasker C312

Connectors: Socapex 37p male or female – Socapex 37p male or female (straight or angled)



### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

## Balanced Microphone Cables: Cable Tasker C312

Connectors: Socapex 37p male or female – Socapex 37p male or female (straight or angled) – Cable Drum Schill



### CHARACTERISTICS

**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

### APPLICATIONS

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

### APPLICATIONS

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C312	12 X 2	12 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	16,0	100	B	45,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

S312FF BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S312FF06	BLACK	6 M	1
S312FF12	BLACK	12 M	1
S312FF24	BLACK	24 M	1
S312FF36	BLACK	36 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C312	12 X 2	12 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	16,0	100	B	45,0

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

S3123 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S3123250	BLACK	50 M	1
S3122100	BLACK	100 M	1



# Multicore Cables

**Balanced Microphone Cables:** Cable Tasker C312 **Connectors:** Connectors: Socapex 37p male or female (straight or angled) – Socapex 37p chassis male or female – Cable Drum Schill



**CHARACTERISTICS**  
**Conductors:** O.F.C. red copper  
**Cond. insulation:** Solid PE  
**Pair colours:** White, Red  
**Drain wire:** O.F.C. tinned copper  
**Pair Shields:** Spiral covering 100% O.F.C. red copper  
**Inner sheaths:** PVC  
**Ins. colours:** Black and numbered  
**Drain wire:** O.F.C. tinned copper  
**Total Shield:** Braided O.F.C. red copper covering 85%  
**Total Sheath:** PVC  
**Sheath colour:** Black

**APPLICATIONS**

Professional extra flex shielded multipair cables with individually shielded and insulated pairs for fixed and mobile laying, in studio installations for connections of audio mixers and direction benches and for the realization of extensions and audio balanced multi-sockets.

The sheaths of the pairs are all black and numbered, in order to make their identification easier during the installation phase.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
		AWG	mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
C312	12 X 2	12 X 2 X 24 (0,22 MM <sup>2</sup> )	28 X 0,10	1,0	3,0	16,0	100	B	45,0


CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION	MAX RATED VOLTAGE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	AC - V	°C
90	75	160	66	49	-15/+70

S312C BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S312C250	BLACK	50 M	1
S312C100	BLACK	100 M	1



# tasker®


...a project further...

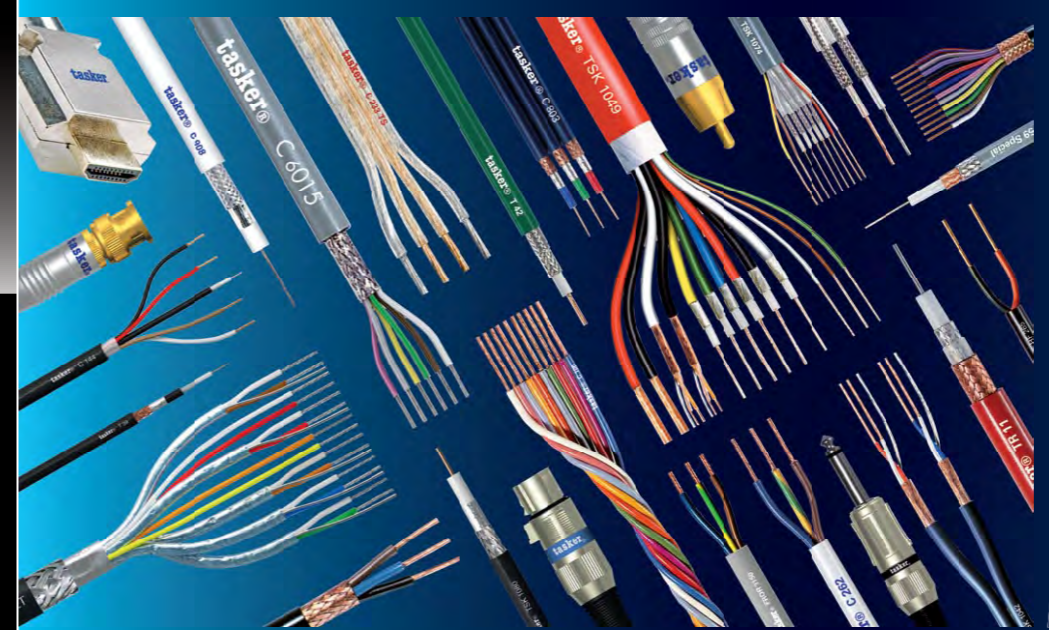

AUDIO VIDEO SYSTEM  
 MP3 HOME THEATER QUALITÀ  
 INFORMATICA COMUNICAZIONE BROADCAST  
 NETWORK EVENTI  
 FLESSIBILITÀ CONNETTORI  
 RICERCA E SVILUPPO LIVE MADE IN ITALY  
 CONCERTI ISOLAMENTO  
 TASKERCABLES.COM  
 MULTIVIDEO

Multicore Cables: Analogue Socapex Connectors

# Note

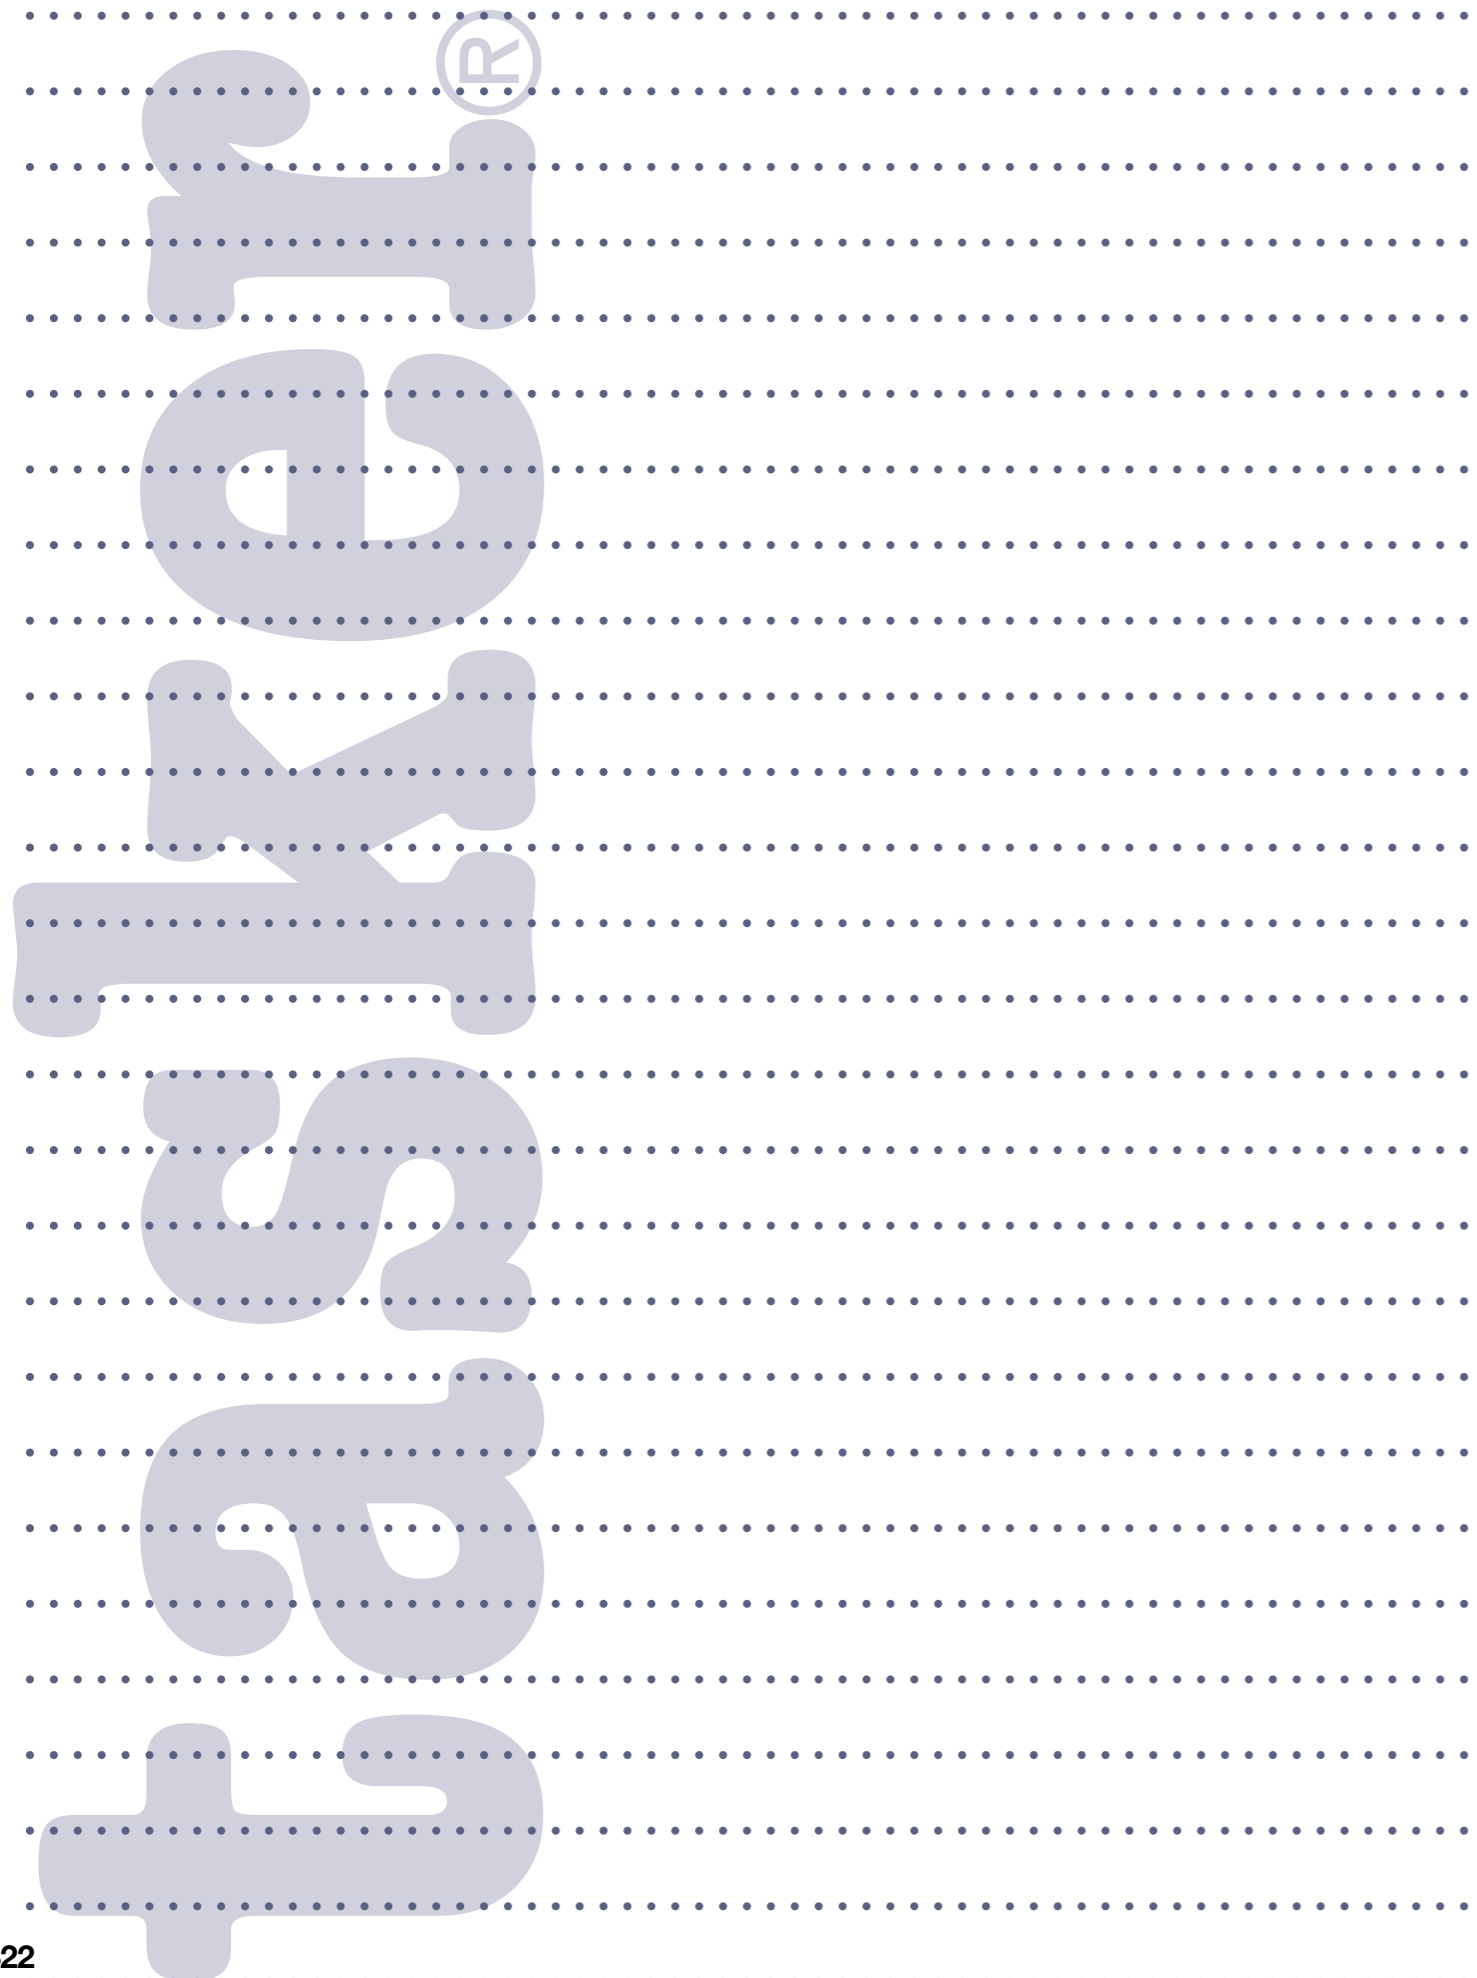

# Special Combi Cable

Digital Audio AES/EBU + Cat.5e (S-FTP) Combi Cables: Cable Tasker C732

Connectors: 2x Neutrik NC8MC + 2x NC3FXX – 2x Neutrik NC8MC + 2x NC3MXX



### CHARACTERISTICS

2xS-FTP Cable cat.5e:

**Conductors:** stiff wire in O.F.C. red copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colours:** White/blue-Blue, White/orange-Orange, White/green-Green, White/brown-Brown  
**Filler:** Cross central filler in PE  
**I° Shield:** Aluminium tape covering 100%  
**Drain wire:** stranded in tinned copper  
**II° Shield:** Braided covering 70% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black and numbered

2xDigital Audio Cable:

**Conductors:** O.F.C. tinned copper  
**Cond. Insulation:** PEE (Foam PE)  
**Pair colour:** Red, Blue  
**I° Shield:** Aluminium/Polyester tape covering 100%  
**Drain wire:** stranded in tinned copper  
**II° Shield:** Braided covering 80% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Grey and numbered  
**Grouping:**  
**Total tape:** Unweaved Polyester Total  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

### APPLICATIONS

Special Hybrid cable composed of: 2 S-FTP cables Cat. 5e + 2 Digital Audio cables 110 Ω AES/EBU for Mixer, Digital Racks and other broadcast installations.

The possibility of broadcasting Audio and Data lines with a single cable offers many advantages like for example:  
 - higher speed and great time saving during laying.  
 - possibility of giving a line to every user and /or arrange future enlargement.

- make checking operations on the equipments easier and post-installation assistance.
- realise a neat and intuitive assembly
- possibility of re-using the cables for several times, make the grouping easier and reducing the costs in case of short term event or fairs.

This cable is suitable for BROADCAST installations, in TV and recording studios, theatres, public buildings and sport facilities, musical events, shows and public square events.  
 The sheaths of the inner elements and the total sheath are in Flame Retardant PVC according to CEI 20-22/II°

TASKER® CODE	INNER CABLE	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C732**	2	4 X 2 X 24 (0,22 MM²)	1 X 0,51	0,95	6,6	16,4	100	B	
	+2	1 X 2 X 24 (0,22 MM²)	7 X 0,20	1,5	4,5				

CONDUCTOR RESISTANCE	IMPEDANCE	MAX RATED VOLTAGE	CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	IMPEDANCE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	Ω ± 5% 1 ÷ 100 MHz	AC - V	Ω/Km ± 5%	pF/mt	pF/mt	Ω	°C
90	100	49	90	50	95	110	-15/+70

TSK732 NIGHT BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
TSK73206	NIGHT BLUE	6 M	1
TSK73212	NIGHT BLUE	12 M	1
TSK73224	NIGHT BLUE	24 M	1
TSK73236	NIGHT BLUE	36 M	1




\*\* Production on demand

# Special Combi Cable

Digital Audio AES/EBU + Cat.5e (S-FTP) Combi Cables: Cable Tasker C732

Connectors: 2x Neutrik NC8MC + 2x NC3FFX – 2x Neutrik NC8MC + 2x NC3MXX – Cable Drum Schill

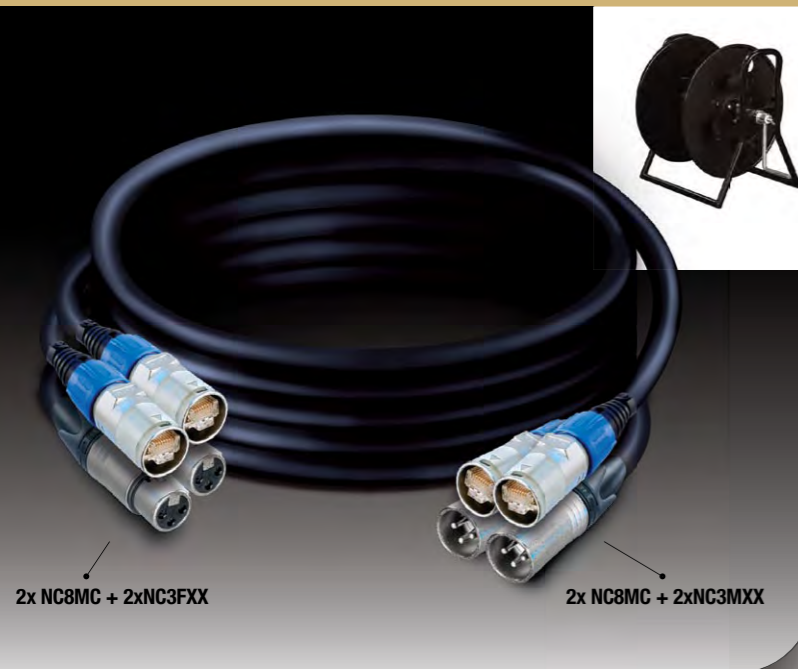

**CHARACTERISTICS**

2xS-FTP Cable cat.5e:

**Conductors:** stiff wire in O.F.C. red copper  
**Cond. insulation:** PEE (Foam PE)  
**Pair colour:** White/blue-Blue, White/orange-Orange, White/green-Green, White/brown-Brown  
**Filler:** Cross central filler in PE  
**I° Shield:** Aluminium tape covering 100%  
**Drain wire:** stranded in tinned copper  
**II° Shield:** Braided covering 70% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black and numbered

2xDigital Audio Cable:

**Conductors:** O.F.C. tinned copper  
**Cond. Insulation:** PEE (Foam PE)  
**Pair colour:** Red, Blue  
**I° Shield:** Aluminium/Polyester tape covering 100%  
**Drain wire:** stranded in tinned copper  
**II° Shield:** Braided covering 80% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Grey and numbered  
**Grouping:**  
**Total tape:** Unweaved Polyester Total  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

2x NC8MC + 2xNC3FFX

2x NC8MC + 2xNC3MXX

Video - Digital Audio - Power Cables: Cable Tasker TSK1069

Connectors: 1x Neutrik BNC + 2x NC3FFX +

Schuko rubber plug –1x Neutrik BNC + 2x NC3MXX + Schuko rubber socket



**APPLICATIONS**

Special cable for connections: Video-Digital Audio- Power.  
 tasker® TSK 1069 can be used in DMX and DVX equipments or to connect and feed other instruments to mixers or digital Audio & Video direction benches.  
 This cable enables the installation process because allows the transmission of many signals through the laying of a single cable. Despite the big external diameter and the variety of the elements that compose this cable, it turns out to be very flexible.

BNC - 2x NC3FFX - Schuko

BNC - 2x NC3MXX - Schuko

**APPLICATIONS**

Special Hybrid cable composed of: 2 S-FTP cables Cat. 5e + 2 Digital Audio cables 110 Ω AES/EBU for Mixer, Digital Racks and other broadcast installations.

The possibility of broadcasting Audio and Data lines with a single cable offers many advantages like for example:  
 - higher speed and great time saving during laying.  
 - possibility of giving a line to every user and /or arrange future enlargement.

- make checking operations on the equipments easier and post-installation assistance.
- realise a neat and intuitive assembly
- possibility of re-using the cables for several times, make the grouping easier and reducing the costs in case of short term event or fairs.

This cable is suitable for BROADCAST installations, in TV and recording studios, theatres, public buildings and sport facilities, musical events, shows and public square events.  
 The sheaths of the inner elements and the total sheath are in Flame Retardant PVC according to CEI 20-22/II°

TASKER® CODE	INNER CABLE	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
							mt.	Type	Kg.
C732**	2	4 X 2 X 24 (0,22 MM²)	1 X 0,51	0,95	6,6	16,4	100	B	
	+2	1 X 2 X 24 (0,22 MM²)	7 X 0,20	1,5	4,5				

CONDUCTOR RESISTANCE	IMPEDANCE	MAX RATED VOLTAGE	CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	IMPEDANCE	OPERATIVE TEMPERATURE
Ω/Km ± 5%	Ω ± 5% 1 ÷ 100 MHz	AC - V	Ω/Km ± 5%	pF/mt	pF/mt	Ω	°C
90	100	49	90	50	95	110	-15/+70

TSK732 NIGHT BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
TSK73050	NIGHT BLUE	50 M	1
TSK73100	NIGHT BLUE	100 M	1



\*\* Production on demand

**CHARACTERISTICS**

Coaxial cable (tasker®RG 59 Flex)

**Conductor:** stranded in O.F.C. red copper  
**Insulation:** PE  
**Shield:** Braided covering 90% O.F.C. red copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

Digital audio cables (tasker®TSK 1038)

**Conductors:** stranded in O.F.C. tinned copper  
**Insulations:** PPE  
**Core colours:** Red, Blue  
**Total taping:** unweaved Polyester  
**Drain wire:** stranded in O.F.C. red copper  
**Shields:** Braided covering 90% O.F.C. red copper  
**Sheaths:** Flame Retardant PVC CEI 20-22/II°  
**Sheaths colours:** Black

Power cable (tasker®C 156)

**Conductors:** stranded in O.F.C. red copper  
**Insulations:** Flame Retardant PVC CEI 20-22/II°  
**Core colours:** Brown, Blue, Yellow/Green  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

Grouping with addition of textile fillers

**Total taping:** unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

TASKER® CODE	COND. NUMBER	COND. NUMBER NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER			ATTENUATION DB/100MT						
							mt.	Type	Kg.	50 MHz	100 MHz	200 MHz	400 MHz	800 MHz	100 MHz	
TSK 1069	1	1 X 75 Ω (0,22 MM²)	7 X 0,20	3,7	6,1	18,7	100	B	45,0							
	+2	+2 X 0,35 (22 AWG)	11 X 0,20	1,6	6,1					8,1	11,7	17,1	24,7	36,1	40,8	
	+2	+2 X 0,35 (22 AWG)	11 X 0,20	1,6	6,1											
	+3	+3 X 1,50 (16 AWG)	48 X 0,20	3,0	7,2											

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION OF COAX	IMPEDANCE OF COAX	RATED VOLTAGE OF POWER	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	UoUV	°C
75		67	66	75	300/300	-15/+70
60	45	90				
60	45	90				
16						

TSK69 NIGHT BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
TSK6912	NIGHT BLUE	12 M	1
TSK6924	NIGHT BLUE	24 M	1
TSK6936	NIGHT BLUE	36 M	1



# Special Combi Cable

**Video - Digital Audio - Power Cables: Cable Tasker TSK1069**

**Connectors: 1x Neutrik BNC + 2x NC3FXX +**

**Schuko rubber plug – 1x Neutrik BNC + 2x NC3MXX + Schuko rubber socket – Cable Drum Schill**

**HDTV - SDI Video - Digital Audio AES/EBU Cables: Cable Tasker TSK1092**

**Connectors: 1x Neutrik BNC + 2x NC3FXX – 1x Neutrik BNC + 2x NC3MXX**



BNC - 2x NC3FXX - Schuko

BNC - 2x NC3MXX - Schuko

**APPLICATIONS**

Special cable for connections: Video-Digital Audio- Power.  
**tasker® TSK 1069** can be used in DMX and DVX equipments or to connect and feed other instruments to mixers or digital Audio & Video direction benches.  
 This cable enables the installation process because allows the transmission of many signals through the laying of a single cable. Despite the big external diameter and the variety of the elements that compose this cable, it turns out to be very flexible.



BNC - 2x NC3FXX

BNC - 2x NC3MXX

**CHARACTERISTICS**

**Coaxial cable**  
**Conductor:** stiff wire in O.F.C. red copper  
**Insulation:** Gas Injected Foam PE  
**I° Shield:** Aluminium Foil Tape covering 100%  
**II° Shield:** Braided covering 95% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colours:** Black

**Digital Audio Cable**  
**Conductors:** stranded in O.F.C. tinned copper  
**Insulation:** PEE  
**Pair colours:** White, Red  
**Drain wire:** stranded in O.F.C. tinned copper  
**Total tape:** Polyester  
**Shield:** Aluminium/Polyester tape covering 100%  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Grey and numbered

**Grouping with addition of textile fillers**  
**Total tape:** Unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°



**CHARACTERISTICS**

**Coaxial cable (tasker®RG 59 Flex)**

**Conductor:** stranded in O.F.C. red copper  
**Insulation:** PE  
**Shield:** Braided covering 90% O.F.C. red copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

**Digital audio cables (tasker®TSK 1038)**

**Conductors:** stranded in O.F.C. tinned copper  
**Insulations:** PPE  
**Core colours:** Red, Blue  
**Total taping:** unweaved Polyester  
**Drain wire:** stranded in O.F.C. red copper  
**Shields:** Braided covering 90% O.F.C. red copper  
**Sheaths:** Flame Retardant PVC CEI 20-22/II°  
**Sheaths colours:** Black

**Power cable (tasker®C 156)**

**Conductors:** stranded in O.F.C. red copper  
**Insulations:** Flame Retardant PVC CEI 20-22/II°  
**Core colours:** Brown, Blue, Yellow/Green  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

**Grouping with addition of textile fillers**

**Total taping:** unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Black

**APPLICATIONS**

Komby cable composed of n°1 HD Video 75 Ω + n°2 Digital Audio 110 Ω AES/EBU for HDTV – HD SDI Video Digital and HD CCTV.  
 This cable can be used for connection of digital equipments: TV, Monitors, Video-cameras, CCTV system, Videowalls, digital Racks, Professional Directions etc...  
 Here the main features of this cable:  
 - pure O.F.C. copper with high conductivity and aging resistant.  
 - high performances central coaxial conductor, suitable for HD BNC 3GHz. (Ø 0,51/ 2,8 / 4,5)  
 - the total flexibility makes the cable suitable for the realization of Audio-Video assemblies.

The possibility of broadcasting Audio and Power lines with a single cable offers many advantages like for example:  
 - higher speed and great time saving during laying.  
 - possibility of giving a line to every user and /or arrange future enlargement.  
 - make checking operations on the equipments easier and post-installation assistance.  
 - realise a neat and intuitive assembly  
 - possibility of re-using the cables for several times, make the grouping easier and reducing the costs in case of short term event or fairs.

This cable is suitable for BROADCAST installations, in TV and recording studios, theatres, public buildings and sport facilities, musical events, shows and public square events. The sheaths of the inner elements and the total sheath are in Flame Retardant PVC according to CEI 20-22/II°.

TASKER® CODE	COND. NUMBER	COND. NUMBER NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE DIAMETER	REEL OR SPOOL COND. NUMBER		
			mm.	Ø mm.	Ø mm.	mm.	mt.	Type	Kg.
TSK 1069	1	1 X 75 Ω (0,22 MM²)	7 X 0,20	3,7	6,1	18,7	100	B	45,0
	+2	+2 X 0,35 (22 AWG)	11 X 0,20	1,6	6,1				
	+2	+2 X 0,35 (22 AWG)	11 X 0,20	1,6	6,1				
	+3	+3 X 1,50 (16 AWG)	48 X 0,20	3,0	7,2				

ATTENUATION DB/100MT						
50 MHz	100 MHz	200 MHz	400 MHz	800 MHz	100 MHz	
8,1	11,7	17,1	24,7	36,1	40,8	

CONDUCTOR RESISTANCE	CAPACITY CORE/CORE	CAPACITY CORE/SHIELD	VELOCITY OF PROPAGATION OF COAX	IMPEDANCE OF COAX	RATED VOLTAGE OF POWER	OPERATIVE TEMPERATURE
Ω/Km ± 5%	pF/mt	pF/mt	%	Ω ± 3%	Uo/U V	°C
75		67	66	75	300/300	-15/+70
60	45	90				
60	45	90				
16						

TSK6 NIGHT BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
TSK6950	NIGHT BLUE	50 M	1
TSK6100	NIGHT BLUE	100 M	1



TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER		
		mm².	mm.	Ø mm.	Ø mm.	Ø mm.	mt.	Type	Kg.
TSK 1092	1	1 X 75 Ω (24 AWG)	1 X 0,60 CU	2,8 GAS INJECTED	4,5	11,5	100	B	
	+2 X 2	2 X 2 X 0,14 (26 AWG)	18 X 0,10 CS	1,2 PEE	3,4				

ATTENUATION DB/100MT									
1 MHz	10 MHz	100 MHz	1 MHz	2 MHz	3 MHz	4,5 MHz	3 MHz	8 MHz	
1,5	3,5	12,8	40,0	56,0	70,0	90,0			
							7,5	11,0	

CONDUCTOR RESISTANCE	NOMINAL DELAY	CAPACITY CORE/SHIELD	CAPACITY CORE/CORE	IMPEDANCE	VELOCITY OF PROPAGATION	OPERATIVE TEMPERATURE
Ω/Km ± 5%	Ns/m	pF/mt	pF/mt	Ω ± 3%	%	°C
65	4,0	54	75	75	82	
140		100	50	110	80	-15 / +70

TSK92 NIGHT BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
TSK9206	NIGHT BLUE	6 M	1
TSK9212	NIGHT BLUE	12 M	1
TSK9224	NIGHT BLUE	24 M	1
TSK9236	NIGHT BLUE	36 M	1



# Special Combi Cable

HDTV - SDI Video - Digital Audio AES/EBU Cables: Cable Tasker TSK1092

Connectors: 1x Neutrik BNC + 2x NC3FXX – 1x Neutrik BNC + 2x NC3MXX – Cable Drum Schill



**BNC - 2x NC3FXX**      **BNC - 2x NC3MXX**

**CHARACTERISTICS**  
**Coaxial cable**  
**Conductor:** stiff wire in O.F.C. red copper  
**Insulation:** Gas Injected Foam PE  
**I° Shield:** Aluminium Foil Tape covering 100%  
**II° Shield:** Braided covering 95% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colours:** Black

**Digital Audio Cable**  
**Conductors:** stranded in O.F.C. tinned copper  
**Insulation:** PEE  
**Pair colours:** White, Red  
**Drain wire:** stranded in O.F.C. tinned copper  
**Total tape:** Polyester  
**Shield:** Aluminium/Polyester tape covering 100%  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Grey and numbered

**Grouping with addition of textile fillers**  
**Total tape:** Unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°

HDTV - SDI Video - Digital Audio AES/EBU Cables: Cable Tasker TSK1093

Connectors: 2x Neutrik BNC + 2x NC3FXX – 2x Neutrik BNC + 2x NC3MXX



**2x BNC - 2x NC3FXX**      **2x BNC - 2x NC3MXX**

**CHARACTERISTICS**  
**Coaxial cable**  
**Conductor:** stiff wire in O.F.C. red copper  
**Insulation:** Gas Injected Foam PE  
**I° Shield:** Aluminium Foil Tape covering 100%  
**II° Shield:** Braided covering 95% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colours:** Black

**Digital Audio Cable**  
**Conductors:** stranded in O.F.C. tinned copper  
**Insulation:** PEE  
**Pair colours:** White, Red  
**Drain wire:** stranded in O.F.C. tinned copper  
**Total tape:** Polyester  
**Shield:** Aluminium/Polyester tape covering 100%  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Grey and numbered

**Grouping with addition of textile fillers**  
**Total tape:** Unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°

## APPLICATIONS

Komby cable composed of n°1 HD Video 75 Ω + n°2 Digital Audio 110 Ω AES/EBU for HDTV – HD SDI Video Digital and HD CCTV.

This cable can be used for connection of digital equipments: TV, Monitors, Video-cameras, CCTV system, Videowalls, digital Racks, Professional Directions etc...

Here the main features of this cable:

- pure O.F.C copper with high conductivity and aging resistant.
- high performances central coaxial conductor, suitable for HD BNC 3GHz. (Ø 0,51/ 2,8 / 4,5)
- the total flexibility makes the cable suitable for the realization of Audio-Video assemblies.

The possibility of broadcasting Audio and Power lines with a single cable offers many advantages like for example:

- higher speed and great time saving during laying.
- possibility of giving a line to every user and /or arrange future enlargement.
- make checking operations on the equipments easier and post-installation assistance.
- realise a neat and intuitive assembly
- possibility of re-using the cables for several times, make the grouping easier and reducing the costs in case of short term event or fairs.

This cable is suitable for BROADCAST installations, in TV and recording studios, theatres, public buildings and sport facilities, musical events, shows and public square events. The sheaths of the inner elements and the total sheath are in Flame Retardant PVC according to CEI 20-22/II°.

## APPLICATIONS

Komby cable composed of n°1 HD Video 75 Ω + n°2 Digital Audio 110 Ω AES/EBU for HDTV – HD SDI Video Digital and HD CCTV.

This cable can be used for connection of digital equipments: TV, Monitors, Video-cameras, CCTV system, Videowalls, digital Racks, Professional Directions etc...

Here the main features of this cable:

- pure O.F.C copper with high conductivity and aging resistant.
- high performances central coaxial conductor, suitable for HD BNC 3GHz. (Ø 0,51/ 2,8 / 4,5)
- the total flexibility makes the cable suitable for the realization of Audio-Video assemblies.

The possibility of broadcasting Audio and Power lines with a single cable offers many advantages like for example:

- higher speed and great time saving during laying.
- possibility of giving a line to every user and /or arrange future enlargement.
- make checking operations on the equipments easier and post-installation assistance.
- realise a neat and intuitive assembly
- possibility of re-using the cables for several times, make the grouping easier and reducing the costs in case of short term event or fairs.

This cable is suitable for BROADCAST installations, in TV and recording studios, theatres, public buildings and sport facilities, musical events, shows and public square events. The sheaths of the inner elements and the total sheath are in Flame Retardant PVC according to CEI 20-22/II°.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER			ATTENUATION DB/100MT												
							mt.	Type	Kg.	1 MHz	10 MHz	100 MHz	1 MHz	2 MHz	3 MHz	4,5 MHz	3 MHz	8 MHz				
TSK 1092	1	1 X 75 Ω (24 AWG)	1 X 0,60 CU	2,8 GAS INJECTED	4,5	11,5	100	B				1,5	3,5	12,8	40,0	56,0	70,0	90,0				
	+2 X 2	2 X 2 X 0,14 (26 AWG)	18 X 0,10 CS	1,2 PEE	3,4														7,5	11,0		

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER			ATTENUATION DB/100MT												
							mt.	Type	Kg.	1 MHz	10 MHz	100 MHz	1 MHz	2 MHz	3 MHz	4,5 MHz	3 MHz	8 MHz				
TSK 1093	2	2 X 75 Ω (24 AWG)	1 X 0,60 CU	2,8 GAS INJECTED	4,5	13,2	100	B				1,5	3,5	12,8	40,0	56,0	70,0	90,0				
	+2 X 2	2 X 2 X 0,14 (26 AWG)	18 X 0,10 CS	1,2 PEE	3,4														7,5	11,0		

CONDUCTOR RESISTANCE	NOMINAL DELAY	CAPACITY CORE/SHEILD	CAPACITY CORE/CORE	IMPEDANCE	VELOCITY OF PROPAGATION	OPERATIVE TEMPERATURE
Ω/Km ± 5%	Ns/m	pF/mt	pF/mt	Ω ± 3%	%	°C
65	4,0	54	50	75	82	
140		100	50	110	80	-15 / +70

CONDUCTOR RESISTANCE	NOMINAL DELAY	CAPACITY CORE/SHEILD	CAPACITY CORE/CORE	IMPEDANCE	VELOCITY OF PROPAGATION	OPERATIVE TEMPERATURE
Ω/Km ± 5%	Ns/m	pF/mt	pF/mt	Ω ± 3%	%	°C
65	4,0	54	50	75	82	
140		100	50	110	80	-15 / +70

TSK9 NIGHT BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
TSK9250	NIGHT BLUE	50 M	1
TSK9100	NIGHT BLUE	100 M	1

TSK91 NIGHT BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
TSK91250	NIGHT BLUE	50 M	1
TSK91100	NIGHT BLUE	100 M	1

# Special Combi Cable

HDTV - SDI Video - Digital Audio AES/EBU Cables: Cable Tasker TSK1094

Connectors: 3x Neutrik BNC + 2x NC3FXX – 3x Neutrik BNC + 2x NC3MXX – Cable Drum Schill



**CHARACTERISTICS**  
**Coaxial cable**  
**Conductor:** stiff wire in O.F.C. red copper  
**Insulation:** Gas Injected Foam PE  
**I° Shield:** Aluminium Foil Tape covering 100%  
**II° Shield:** Braided covering 95% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colours:** Black


**Digital Audio Cable**  
**Conductors:** stranded in O.F.C. tinned copper  
**Insulation:** PEE  
**Pair colours:** White, Red  
**Drain wire:** stranded in O.F.C. tinned copper  
**Total tape:** Polyester  
**Shield:** Aluminium/Polyester tape covering 100%  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Grey and numbered

**Grouping with addition of textile fillers**  
**Total tape:** Unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°

3x BNC - 2x NC3FXX  
 3x BNC - 2x NC3MXX

HDTV - SDI Video - Digital Audio AES/EBU Cables: Cable Tasker TSK1095

Connectors: 5x Neutrik BNC + 2x NC3FXX – 5x Neutrik BNC + 2x NC3MXX – Cable Drum Schill

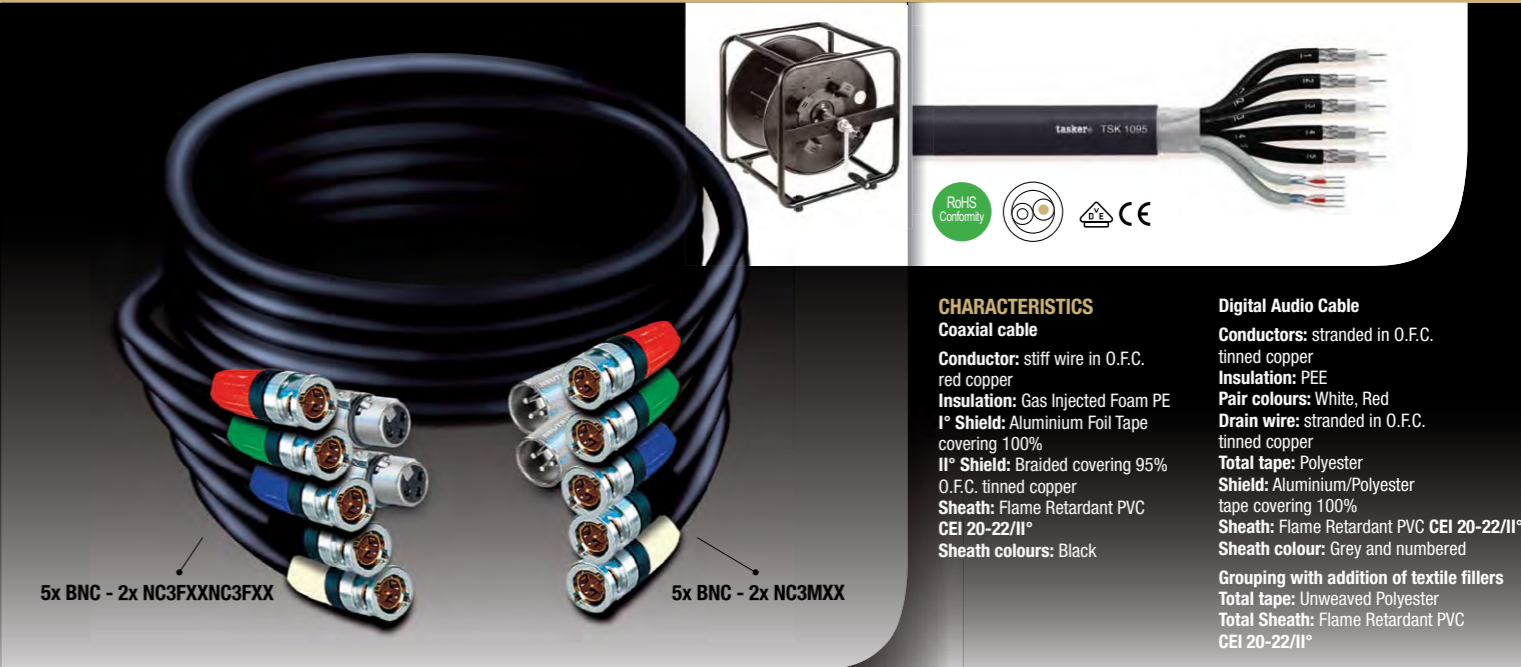

**CHARACTERISTICS**  
**Coaxial cable**  
**Conductor:** stiff wire in O.F.C. red copper  
**Insulation:** Gas Injected Foam PE  
**I° Shield:** Aluminium Foil Tape covering 100%  
**II° Shield:** Braided covering 95% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colours:** Black

**Digital Audio Cable**  
**Conductors:** stranded in O.F.C. tinned copper  
**Insulation:** PEE  
**Pair colours:** White, Red  
**Drain wire:** stranded in O.F.C. tinned copper  
**Total tape:** Polyester  
**Shield:** Aluminium/Polyester tape covering 100%  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Grey and numbered

**Grouping with addition of textile fillers**  
**Total tape:** Unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°

5x BNC - 2x NC3FXX  
 5x BNC - 2x NC3MXX

## APPLICATIONS

Komby cable composed of n°1 HD Video 75 Ω + n°2 Digital Audio 110 Ω AES/EBU for HDTV – HD SDI Video Digital and HD CCTV.

This cable can be used for connection of digital equipments: TV, Monitors, Video-cameras, CCTV system, Videowalls, digital Racks, Professional Directions etc...

Here the main features of this cable:

- pure O.F.C copper with high conductivity and aging resistant.
- high performances central coaxial conductor, suitable for HD BNC 3GHz. (Ø 0,51/ 2,8 / 4,5)
- the total flexibility makes the cable suitable for the realization of Audio-Video assemblies.

The possibility of broadcasting Audio and Power lines with a single cable offers many advantages like for example:

- higher speed and great time saving during laying.
- possibility of giving a line to every user and /or arrange future enlargement.
- make checking operations on the equipments easier and post-installation assistance.
- realise a neat and intuitive assembly
- possibility of re-using the cables for several times, make the grouping easier and reducing the costs in case of short term event or fairs.

This cable is suitable for BROADCAST installations, in TV and recording studios, theatres, public buildings and sport facilities, musical events, shows and public square events. The sheaths of the inner elements and the total sheath are in Flame Retardant PVC according to CEI 20-22/II°.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER			ATTENUATION DB/100MT													
							mt.	Type	Kg.	1 MHz	10 MHz	100 MHz	1 MHz	2 MHz	3 MHz	4,5 MHz	3 MHz	8 MHz					
TSK 1094**	3	3 X 75 Ω (24 AWG)	1 X 0,60 CU	2,8 GAS INJECTED	4,5	14,58	100	B				1,5	3,5	12,8	40,0	56,0	70,0	90,0					
	+2 X 2	2 X 2 X 0,14 (26 AWG)	18 X 0,10 CS	1,2 PEE	3,4														7,5	11,0			

CONDUCTOR RESISTANCE	NOMINAL DELAY	CAPACITY CORE/SHEILD	CAPACITY CORE/CORE	IMPEDANCE	VELOCITY OF PROPAGATION	OPERATIVE TEMPERATURE
Ω/Km ± 5%	Ns/m	pF/mt	pF/mt	Ω ± 3%	%	°C
65	4,0	54	50	75	82	
140		100	50	110	80	-15 / +70

TSK92 NIGHT BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
TSK92250	NIGHT BLUE	50 M	1
TSK92100	NIGHT BLUE	100 M	1

\*\* Production on demand

## APPLICATIONS

Komby cable composed of n°1 HD Video 75 Ω + n°2 Digital Audio 110 Ω AES/EBU for HDTV – HD SDI Video Digital and HD CCTV.

This cable can be used for connection of digital equipments: TV, Monitors, Video-cameras, CCTV system, Videowalls, digital Racks, Professional Directions etc...

Here the main features of this cable:

- pure O.F.C copper with high conductivity and aging resistant.
- high performances central coaxial conductor, suitable for HD BNC 3GHz. (Ø 0,51/ 2,8 / 4,5)
- the total flexibility makes the cable suitable for the realization of Audio-Video assemblies.

The possibility of broadcasting Audio and Power lines with a single cable offers many advantages like for example:

- higher speed and great time saving during laying.
- possibility of giving a line to every user and /or arrange future enlargement.
- make checking operations on the equipments easier and post-installation assistance.
- realise a neat and intuitive assembly
- possibility of re-using the cables for several times, make the grouping easier and reducing the costs in case of short term event or fairs.

This cable is suitable for BROADCAST installations, in TV and recording studios, theatres, public buildings and sport facilities, musical events, shows and public square events. The sheaths of the inner elements and the total sheath are in Flame Retardant PVC according to CEI 20-22/II°.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER			ATTENUATION DB/100MT													
							mt.	Type	Kg.	1 MHz	10 MHz	100 MHz	1 MHz	2 MHz	3 MHz	4,5 MHz	3 MHz	8 MHz					
TSK 1095**	5	5 X 75 Ω (24 AWG)	1 X 0,60 CU	2,8 GAS INJECTED	4,5	17,2	100	B				1,5	3,5	12,8	40,0	56,0	70,0	90,0					
	+2 X 2	2 X 2 X 0,14 (26 AWG)	18 X 0,10 CS	1,2 PEE	3,4														7,5	11,0			

CONDUCTOR RESISTANCE	NOMINAL DELAY	CAPACITY CORE/SHEILD	CAPACITY CORE/CORE	IMPEDANCE	VELOCITY OF PROPAGATION	OPERATIVE TEMPERATURE
Ω/Km ± 5%	Ns/m	pF/mt	pF/mt	Ω ± 3%	%	°C
65	4,0	54	50	75	82	
140		100	50	110	80	-15 / +70

TSK93 NIGHT BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
TSK93250	NIGHT BLUE	50 M	1
TSK93100	NIGHT BLUE	100 M	1

\*\* Production on demand

# Special Combi Cable

HDTV - SDI Video - Digital Audio AES/EBU Cables: Cable Tasker TSK1096

Connectors: 4x Neutrik BNC + 4x NC3FXX – 4x Neutrik BNC + 4x NC3MXX – Cable Drum Schill



### CHARACTERISTICS

#### Coaxial cable

**Conductor:** stiff wire in O.F.C. red copper  
**Insulation:** Gas Injected Foam PE  
**I° Shield:** Aluminium Foil Tape covering 100%  
**II° Shield:** Braided covering 95% O.F.C. tinned copper  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colours:** Black

#### Digital Audio Cable

**Conductors:** stranded in O.F.C. tinned copper  
**Insulation:** PEE  
**Pair colours:** White, Red  
**Drain wire:** stranded in O.F.C. tinned copper  
**Total tape:** Polyester  
**Shield:** Aluminium/Polyester tape covering 100%  
**Sheath:** Flame Retardant PVC CEI 20-22/II°  
**Sheath colour:** Grey and numbered  
**Grouping with addition of textile fillers**  
**Total tape:** Unweaved Polyester  
**Total Sheath:** Flame Retardant PVC CEI 20-22/II°

### APPLICATIONS

Komby cable composed of n°1 HD Video 75 Ω + n°2 Digital Audio 110 Ω AES/EBU for HDTV – HD SDI Video Digital and HD CCTV.

This cable can be used for connection of digital equipments: TV, Monitors, Video-cameras, CCTV system, Videowalls, digital Racks, Professional Directions etc...

Here the main features of this cable:

- pure O.F.C copper with high conductivity and aging resistant.
- high performances central coaxial conductor, suitable for HD BNC 3GHz. (Ø 0,51/ 2,8 / 4,5)
- the total flexibility makes the cable suitable for the realization of Audio-Video assemblies.

The possibility of broadcasting Audio and Power lines with a single cable offers many advantages like for example:

- higher speed and great time saving during laying.
- possibility of giving a line to every user and /or arrange future enlargement.
- make checking operations on the equipments easier and post-installation assistance.
- realise a neat and intuitive assembly
- possibility of re-using the cables for several times, make the grouping easier and reducing the costs in case of short term event or fairs.

This cable is suitable for BROADCAST installations, in TV and recording studios, theatres, public buildings and sport facilities, musical events, shows and public square events. The sheaths of the inner elements and the total sheath are in Flame Retardant PVC according to CEI 20-22/II°.

TASKER® CODE	COND. NUMBER	NOMINAL SECTION	COND. FORMAT.	EXTERNAL CORE	EXTERNAL INNER SHEATH	EXTERNAL CABLE	REEL OR SPOOL COND. NUMBER			ATTENUATION DB/100MT													
							mt.	Type	Kg.	1 MHz	10 MHz	100 MHz	1 MHz	2 MHz	3 MHz	4,5 MHz	3 MHz	8 MHz					
TSK 1096 **	4	4 X 75 Ω (24 AWG)	1 X 0,60 CU	2,8 GAS INJECTED	4,5	17,4	100	B				1,5	3,5	12,8	40,0	56,0	70,0	90,0					
	+2 X 2	2 X 2 X 0,14 (26 AWG)	18 X 0,10 CS	1,2 PEE	3,4														7,5	11,0			


CONDUCTOR RESISTANCE	NOMINAL DELAY	CAPACITY CORE/SHEATH	CAPACITY CORE/CORE	IMPEDANCE	VELOCITY OF PROPAGATION	OPERATIVE TEMPERATURE
Ω/Km ± 5%	Ns/m	pF/mt	pF/mt	Ω ± 3%	%	°C
65	4,0	54	75	75	82	
140		100	50	110	80	-15 / +70

TSK94 NIGHT BLUE			
PART NR.	COLOR	LENGTH	PACK. UNIT
TSK94250	NIGHT BLUE	50 M	1
TSK94100	NIGHT BLUE	100 M	1

\*\* Production on demand

AUDIO VIDEO RICERCA EL LIVE  
 SYSTEM SVILUPPO  
 MP3 HOME QUALITÀ CONCERTI ISOLAMENTO  
 THEATER  
 INFORMATICA COMUNICAZIONE TASKERCABLES.COM  
 NETWORK BROADCAST  
 FLESSIBILITÀ CONNETTORI EVENTI MULTIVIDEO

## ...a project further...

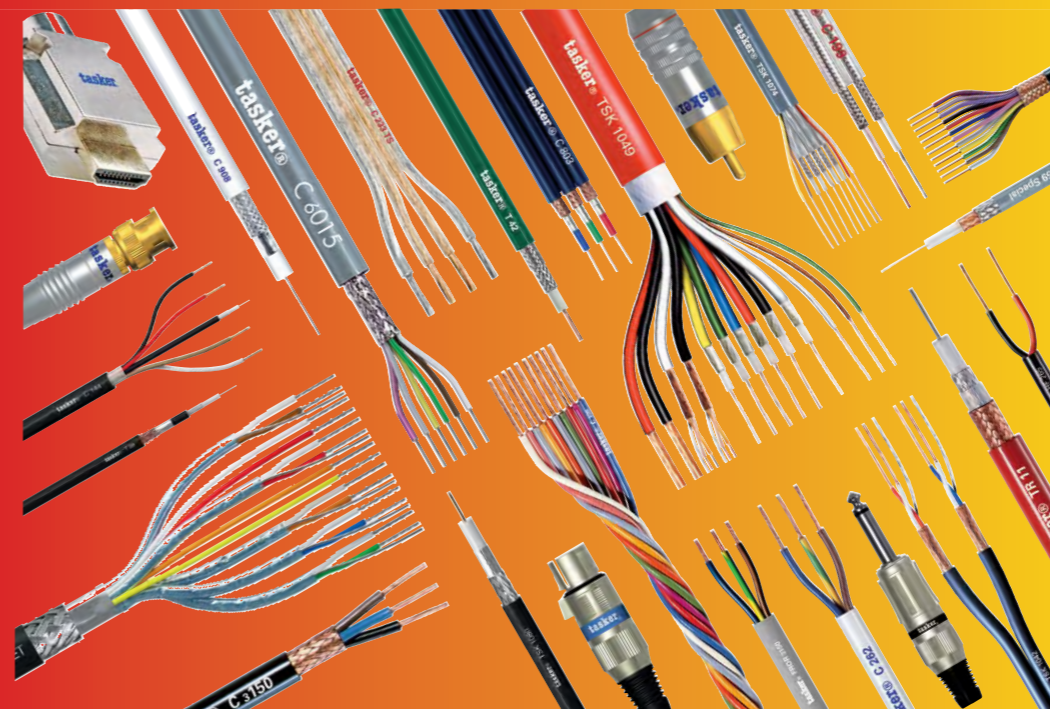


Produzioni speciali su richiesta!  
 Tutto in pronta consegna!  
 Special production on demand!  
 Everything on stock!

[www.tasker.it](http://www.tasker.it)

made in Italy

# TASKER®

# Note

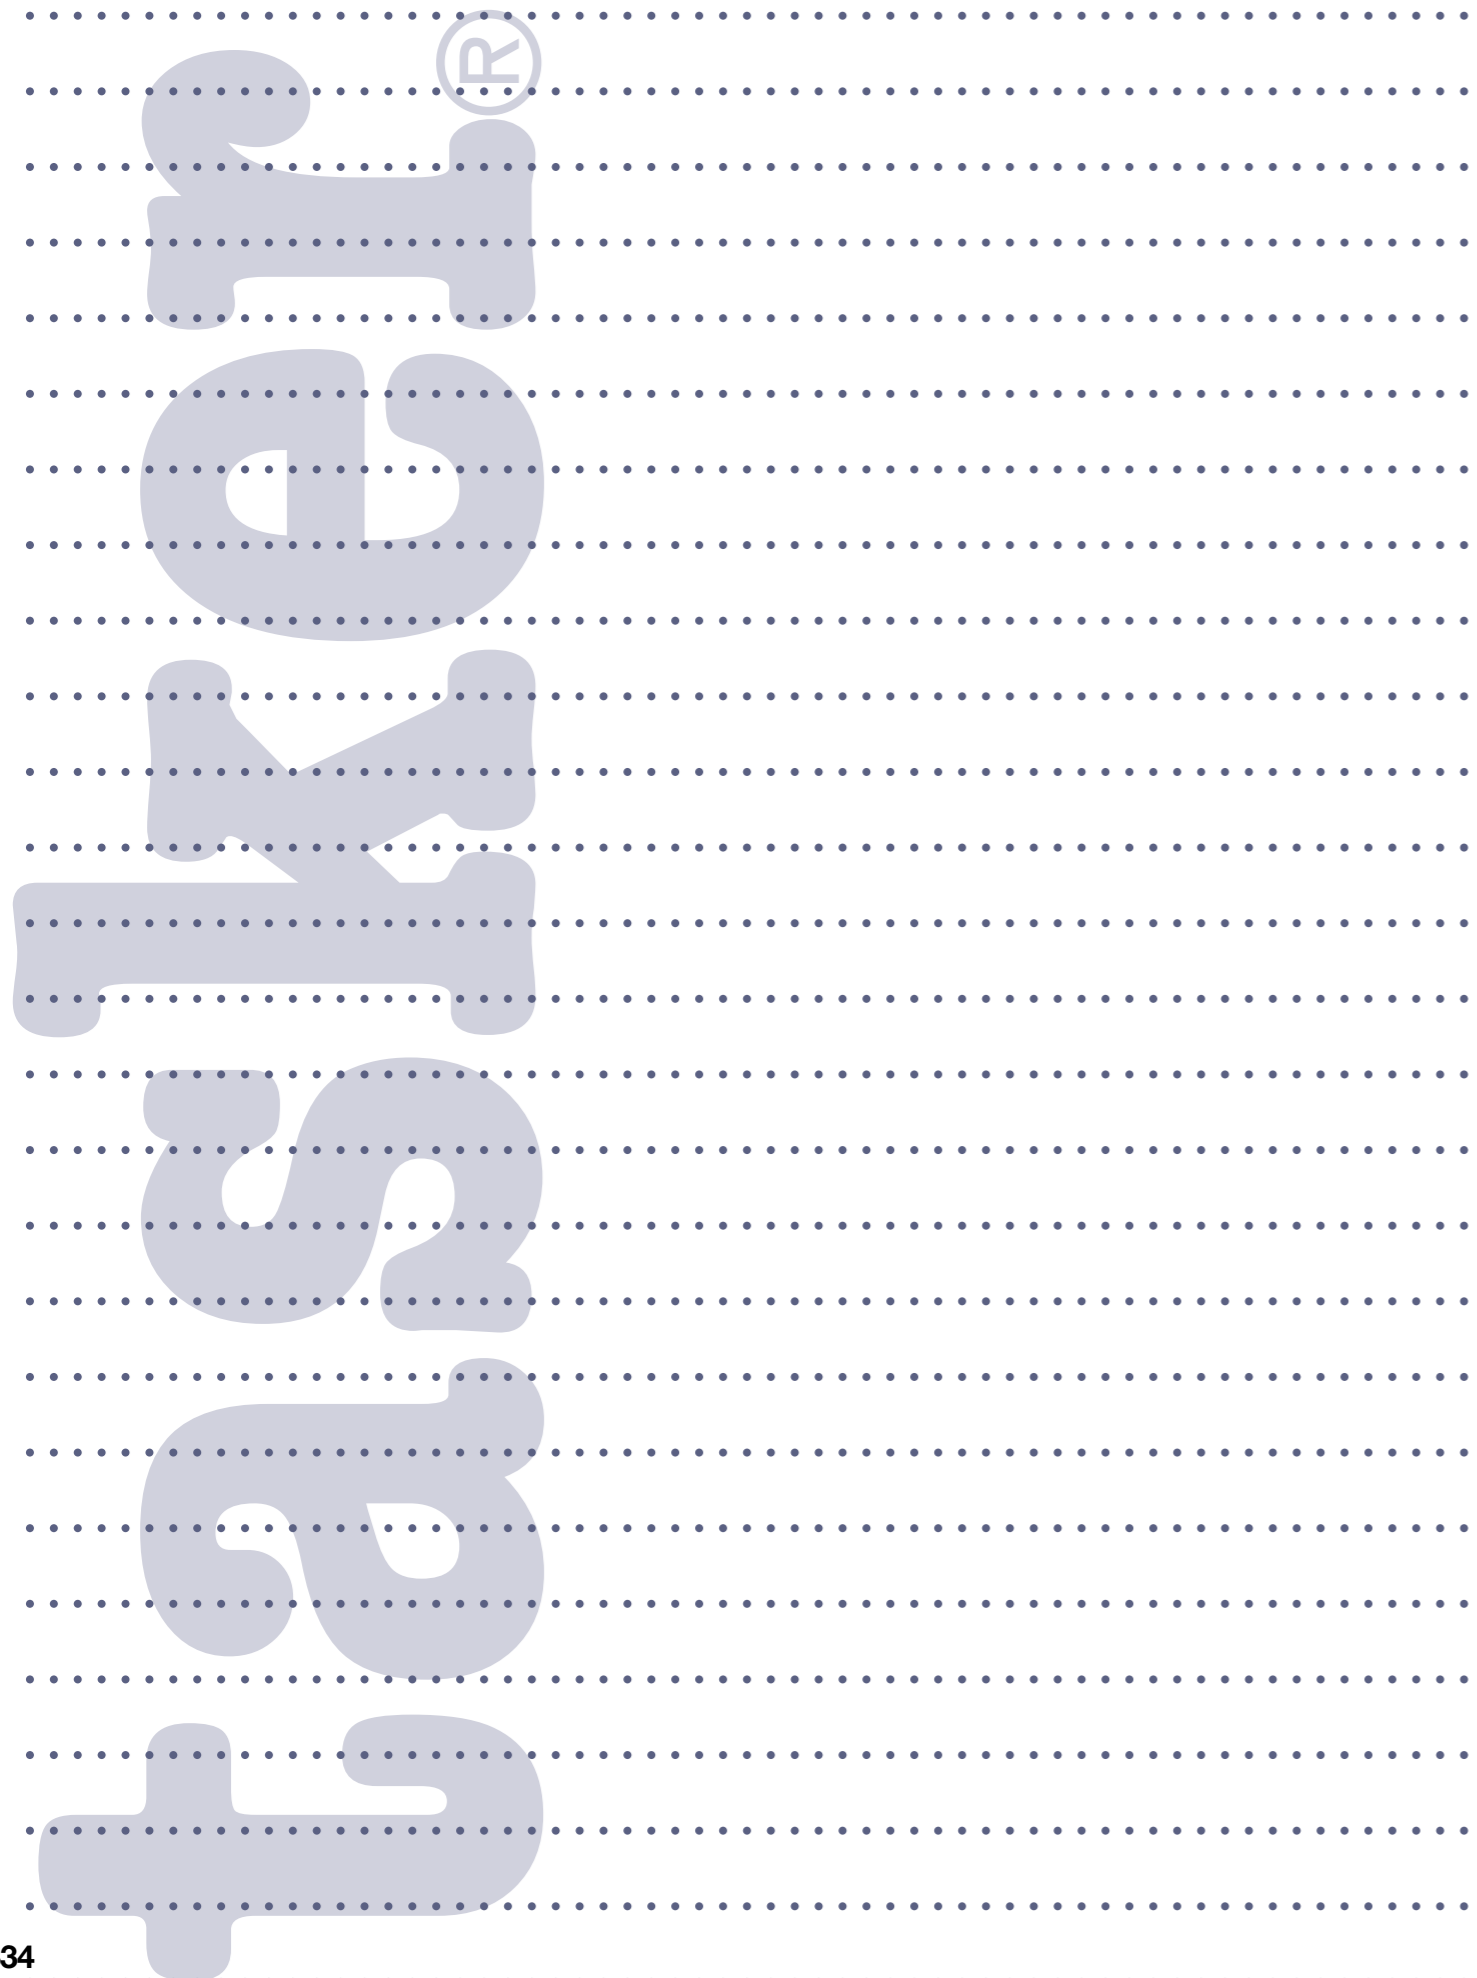

# Power Cables

**Cables:** Titanex H07 RN-F 3x1,5mm<sup>2</sup>

**Connectors:** 3x AC Outlet (10/16A 250V IP44) incl cable and Schuko rubber plug



**TECHNICAL DATA**  
 Special elastomer sheathed cable H07 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
 Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation U0/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø min – max: 9,2 – 11,9 mm

### APPLICATIONS

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

AC03 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
AC0305	BLACK	10 M	1
AC0310	BLACK	20 M	1



# Power Cables

**Cables:** Titanex HO7 RN-F 3x1,5mm<sup>2</sup>


**Connectors:** 4x AC Outlet(10/16A 250V IP44) incl cable and Schuko rubber plug



**TECHNICAL DATA**  
 Special elastomer sheathed cable HO7 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
 Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation Uo/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø min – max: 9,2 – 11,9 mm

**Cables:** Titanex HO7 RN-F 3x2,5mm<sup>2</sup>

**Connectors:** 4x AC Outlet (10/16A 250V IP44) incl cable and Schuko rubber plug

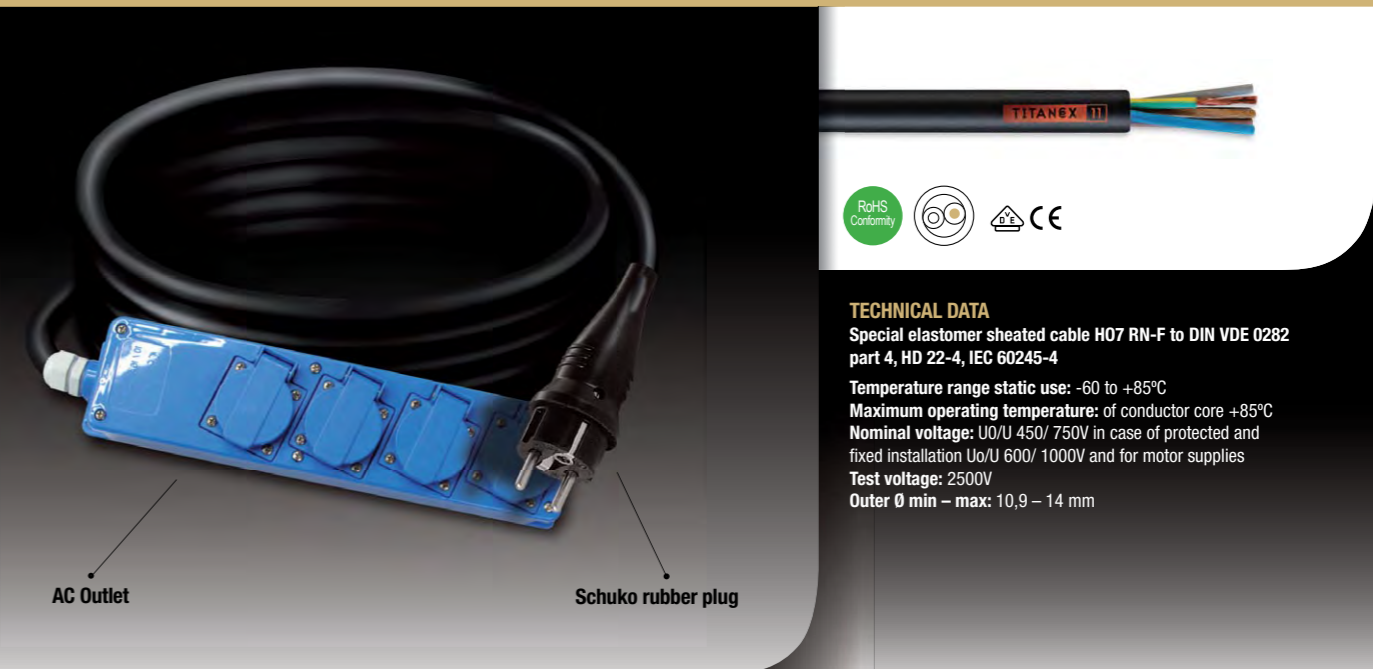


**TECHNICAL DATA**  
 Special elastomer sheathed cable HO7 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
 Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation Uo/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø min – max: 10,9 – 14 mm

**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

ACO4 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
ACO403B	BLACK	3 M	1
ACO403B	BLACK	5 M	1
ACO410B	BLACK	10 M	1
ACO425B	BLACK	25 M	1



**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

ACO4 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
ACO403	BLACK	3 M	1
ACO405	BLACK	5 M	1
ACO410	BLACK	10 M	1
ACO425	BLACK	25 M	1



# Power Cables

**Cables:** Titanex HO7 RN-F 3x2,5mm<sup>2</sup>

**Connectors:** 1x CEE plug – 2x CEE connector socket (230V 16A 3p IP44)



**TECHNICAL DATA**  
 Special elastomer sheathed cable HO7 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
 Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation Uo/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø min – max: 10,9 – 14 mm

**Cables:** Titanex HO7 RN-F 3x2,5mm<sup>2</sup>

**Connectors:** 1x Syntax SSX19 (compatible with 19 p Socapex) – 6x CEE plug (230V 16A 3p IP44)



**TECHNICAL DATA**  
 Special elastomer sheathed cable HO7 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
 Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation Uo/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø min – max: 10,9 – 14 mm

**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

AD1S2P16R BLACK		
PART NR.	COLOR	PACK. UNIT
AD1S2P16R	BLACK	1



**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

SP19F0 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SP19F010	BLACK	1 M	1
SP19F015	BLACK	1,5 M	1
SP19F020	BLACK	2 M	1



# Power Cables

**Cables:** Titanex H07 RN-F 3x2,5mm<sup>2</sup>


**Connectors:** 1x Syntax SSX19 (compatible with 19 p Socapex) – 6x CEE connector socket (230V 16A 3p IP44)



**TECHNICAL DATA**  
 Special elastomer sheathed cable H07 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
 Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation U0/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø min – max: 10,9 – 14 mm

**Cables:** Titanex H07 RN-F 12x2,5mm<sup>2</sup>

**Connectors:** 4x CEE plug – 4x CEE connector socket (230V 16A 3p IP44)

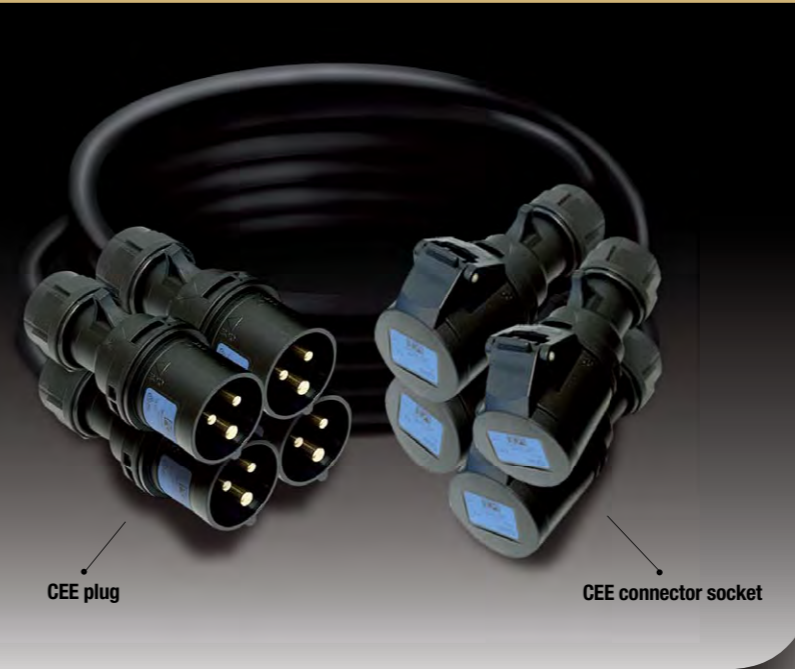


**TECHNICAL DATA**  
 Special elastomer sheathed cable H07 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
 Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation U0/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø ca, 19 mm

**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

SP19M0 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SP19M010	BLACK	1 M	1
SP19M015	BLACK	1.5 M	1
SP19M020	BLACK	2 M	1



**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

EC1MPB4C-L BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
EC1MPB4C-L10	BLACK	10 M	1
EC1MPB4C-L20	BLACK	20 M	1



# Power Cables

**Cables:** Titanex/Theaterflex H07 RN-F 19x2,5mm<sup>2</sup>

**Connectors:** 6x CEE plug – 6x CEE connector socket (230V 16A 3p IP44)



**TECHNICAL DATA**  
 Special elastomer sheathed cable H07 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
 Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation Uo/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø ca, 27 mm

**Cables:** Titanex H07 RN-F 3x2,5mm<sup>2</sup>

**Connectors:** Schuko rubber plug and connector



**TECHNICAL DATA**  
 Special elastomer sheathed cable H07 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
 Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation Uo/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø min – max: 10,9 – 14 mm

**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

EC1MPB6C-L BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
EC1MPB6C-L10	BLACK	10 M	1
EC1MPB6C-L20	BLACK	20 M	1



SHXGT BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SHXGT06	BLACK	6 M	1
SHXGT12	BLACK	12 M	1
SHXGT24	BLACK	24 M	1



# Power Cables

**Cables:** Titanex HO7 RN-F 3x2,5mm<sup>2</sup>

**Connectors:** CEE plug and connector socket (230V 16A 3p IP44)



**TECHNICAL DATA**

Special elastomer sheathed cable HO7 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4

Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation U0/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø min – max: 10,9 – 14 mm

**Cables:** Titanex/Theaterflex HO7 RN-F 19x2,5mm<sup>2</sup>

**Connectors:** Syntax SSX19 (compatible with 19 p Socapex) male and female



**TECHNICAL DATA**

Special elastomer sheathed cable HO7 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4

Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation U0/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø ca, 27 mm

**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

SSXGT BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SSXGT06	BLACK	6 M	1
SSXGT12	BLACK	12 M	1
SSXGT24	BLACK	24 M	1



**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

SSXFM BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SSXFM06	BLACK	6 M	1
SSXFM12	BLACK	12 M	1
SSXFM18	BLACK	18 M	1
SSXFM24	BLACK	24 M	1
SSXFM36	BLACK	36 M	1



# Power Cables

**Cables:** Titanex/Theaterflex H07 RN-F 19x2,5mm<sup>2</sup>

**Connectors:** Syntax SSSX19 (compatible with 19 p Socapex) male and female – Cable Drum Schill



SSX19 male

SSX19 female



RoHS Conformity

CE

**TECHNICAL DATA**  
 Special elastomer sheathed cable H07 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
 Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation Uo/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø ca, 27 mm

**Cables:** Titanex H07 RN-F 3x2,5mm<sup>2</sup>

**Connectors:** CEE plug and connector socket (230V 16A 3p IP44) - Cable Drum Schill



CEE plug

CEE connector socket



RoHS Conformity

CE


**TECHNICAL DATA**  
 Special elastomer sheathed cable H07 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
 Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation Uo/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø min – max: 10,9 – 14 mm

**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

SSXFM BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SSXFM50	BLACK	50 M	1
SSXFM100	BLACK	100 M	1




**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

SSXGT BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SSXGT50	BLACK	50 M	1
SSXGT100	BLACK	100 M	1



# Power Cables

**Cables:** Titanex HO7 RN-F 3x2,5mm<sup>2</sup>

**Connectors:** Schuko rubber plug and Schuko socket (chassis) - Cable Drum Schill



**Schuko rubber plug**      **Schuko socket**

**TECHNICAL DATA**  
 Special elastomer sheathed cable HO7 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
**Temperature range static use:** -60 to +85°C  
**Maximum operating temperature:** of conductor core +85°C  
**Nominal voltage:** U0/U 450/ 750V in case of protected and fixed installation U0/U 600/ 1000V and for motor supplies  
**Test voltage:** 2500V  
**Outer Ø min – max:** 10,9 – 14 mm

**Cables:** Titanex HO7 RN-F 5x2,5mm<sup>2</sup>

**Connectors:** CEE plug and connector socket (400V 16A 5p IP44) - Cable Drum Schill



**CEE plug**      **CEE connector socket**

**TECHNICAL DATA**  
 Special elastomer sheathed cable HO7 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
**Temperature range static use:** -60 to +85°C  
**Maximum operating temperature:** of conductor core +85°C  
**Nominal voltage:** U0/U 450/ 750V in case of protected and fixed installation U0/U 600/ 1000V and for motor supplies  
**Test voltage:** 2500V  
**Outer Ø min – max:** 13,3 – 17 mm

**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

SSXGT BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
16AN4450	BLACK	50 M	1
16AN44100	BLACK	100 M	1



**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

SSX5T BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
SSX5T50	BLACK	50 M	1
SSX5T100	BLACK	100 M	1



# Power Cables

**Cables:** Titanex HO7 RN-F 5x2,5mm<sup>2</sup>

**Connectors:** CEE plug and connector socket (400V 32A 5p IP44) - Cable Drum Schill



Technical specifications and compliance icons for the Titanex HO7 RN-F 5x2,5mm<sup>2</sup> cable.

**TECHNICAL DATA**  
 Special elastomer sheathed cable HO7 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
 Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation Uo/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø min – max: 13,3 – 17 mm

Compliance icons: RoHS Conformity, CE, and a triangle with a circle.

**Cables:** Titanex HO7 RN-F 5x4 mm<sup>2</sup>

**Connectors:** CEE plug and connector socket (400V 32A 5p IP44) - Cable Drum Schill



Technical specifications and compliance icons for the Titanex HO7 RN-F 5x4 mm<sup>2</sup> cable.

**TECHNICAL DATA**  
 Special elastomer sheathed cable HO7 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
 Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation Uo/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø min – max: 15,6 – 19,9 mm


Compliance icons: RoHS Conformity, CE, and a triangle with a circle.

**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

S325T BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
S325T50	BLACK	50 M	1
S325T100	BLACK	100 M	1




**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

4325T BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
4325T50	BLACK	50 M	1
4325T100	BLACK	100 M	1



# Power Cables

**Cables:** Titanex HO7 RN-F 5x6 mm<sup>2</sup>

**Connectors:** CEE plug and connector socket (400V 32A 5p IP44) - Cable Drum Schill



CEE plug

CEE connector socket

**TECHNICAL DATA**  
 Special elastomer sheathed cable HO7 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
 Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation Uo/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø min – max: 17,5 – 22,2 mm

**Cables:** Titanex HO7 RN-F 5x10 mm<sup>2</sup>

**Connectors:** CEE plug and connector socket (400V 63A 5p IP44) - Cable Drum Schill



CEE plug

CEE connector socket

**TECHNICAL DATA**  
 Special elastomer sheathed cable HO7 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
 Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation Uo/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø min – max: 22,9 - 29,1 mm

### APPLICATIONS

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

6325T BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
6325T50	BLACK	50 M	1
6325T100	BLACK	100 M	1



### APPLICATIONS

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

6325T1 BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
6325T150	BLACK	50 M	1



# Power Cables

**Cables:** Titanex HO7 RN-F 5x25mm<sup>2</sup>

**Connectors:** CEE plug and connector socket (400V 125A 5p IP44) - Cable Drum Schill



**Cables:** Titanex HO7 RN-F 3x1,5mm<sup>2</sup>

**Connectors:** Neutrik NAC3FCA - CEE plug (230V 16A 3p IP44)



### APPLICATIONS

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

1255T BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
1255T50	BLACK	50 M	1



### APPLICATIONS

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

P315SNP BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
P315SNP1	BLACK	1.5 M	1
P315SNP2	BLACK	3 M	1
P315SNP5	BLACK	5 M	1



# Power Cables

**Cables:** Titanex HO7 RN-F 3x1,5mm<sup>2</sup>

**Connectors:** Neutrik NAC3FCA – Neutrik NAC3FCB



**TECHNICAL DATA**  
 Special elastomer sheathed cable HO7 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
**Temperature range static use:** -60 to +85°C  
**Maximum operating temperature:** of conductor core +85°C  
**Nominal voltage:** U0/U 450/ 750V in case of protected and fixed installation U0/U 600/ 1000V and for motor supplies  
**Test voltage:** 2500V  
**Outer Ø min – max:** 9,2 – 11,9 mm

**Cables:** Titanex HO7 RN-F 3x2,5mm<sup>2</sup>

**Connectors:** Neutrik NAC3FCA – Schuko rubber plug



**TECHNICAL DATA**  
 Special elastomer sheathed cable HO7 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
**Temperature range static use:** -60 to +85°C  
**Maximum operating temperature:** of conductor core +85°C  
**Nominal voltage:** U0/U 450/ 750V in case of protected and fixed installation U0/U 600/ 1000V and for motor supplies  
**Test voltage:** 2500V  
**Outer Ø min – max:** 10,9 – 14 mm

**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

P315SNPP BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
P315NPP1	BLACK	1.5 M	1
P315NPP2	BLACK	3 M	1
P315NPP5	BLACK	5 M	1



**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

16ANAC BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
16ANAC06	BLACK	6 M	1
16ANAC12	BLACK	12 M	1
16ANAC24	BLACK	24 M	1
16ANAC36	BLACK	36 M	1



# Power Cables

**Cables:** Titanex HO7 RN-F 3x2,5mm<sup>2</sup>

**Connectors:** Neutrik NAC3FCA – Schuko rubber plug – Cable Drum Schill



**TECHNICAL DATA**  
 Special elastomer sheathed cable HO7 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
 Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation U0/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø min – max: 10,9 – 14 mm

Labels: NAC3FCA, Schuko rubber plug

**Cables:** Titanex HO7 RN-F 3x2,5mm<sup>2</sup>

**Connectors:** Neutrik NAC3FCA – Neutrik NAC3FCB – Cable Drum Schill



**TECHNICAL DATA**  
 Special elastomer sheathed cable HO7 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4  
 Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation U0/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø min – max: 10,9 – 14 mm


Labels: NAC3FCA, NAC3FCB

## APPLICATIONS

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

16ANA BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
16ANAC50	BLACK	50 M	1
16ANA100	BLACK	100 M	1




## APPLICATIONS

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

NAGB BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NAGB050	BLACK	50 M	1
NAGB100	BLACK	100 M	1



# Power Cables

**Cables:** Titanex H07 RN-F 3x4 mm<sup>2</sup>

**Connectors:** Neutrik NAC3FC-HC – Neutrik NAC3MP-HC – Cable Drum Schill



**TECHNICAL DATA**

Special elastomer sheathed cable H07 RN-F to DIN VDE 0282 part 4, HD 22-4, IEC 60245-4

Temperature range static use: -60 to +85°C  
 Maximum operating temperature: of conductor core +85°C  
 Nominal voltage: U0/U 450/ 750V in case of protected and fixed installation U0/U 600/ 1000V and for motor supplies  
 Test voltage: 2500V  
 Outer Ø min – max: 12,7 – 16,2 mm

**APPLICATIONS**

Heavy duty rubber – sheathed flexible cable are suited for use for medium stress in dry, damp and wet areas as well as in open air and in agriculture plants. They are used for equipment in industry works such as boilers, heating plates, hand lamps, Electrical tools such as drills, circular saws and homework tools as well as for transportable motors or machines on site.

These cables are also suitable for fixed installation on plaster, in temporary buildings and residential barracks. They are suitable for direct laying on components and mechanical parts of machines.

NAHC BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
NAHC050	BLACK	50 M	1
NAHC100	BLACK	100 M	1



# tasker®



# WHITE CABLES



# Note

Vertical dotted lines for notes.

# OCC Optical Cable

Cables: OCC 2x Single mode (9/125 μm)

Connectors: 2x Stratos HMC



### FEATURES

- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment
- 2 to 24 fibers, higher fiber counts are available on request
- Distribution Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- Helically stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Cables are suitable for use with single, as well as, multichannel connectors
- Excellent crush resistance to withstand crowd and vehicle traffic
- High tensile load rating for quick deployment and retrieval
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- Water-resistant and UV-resistant for extreme environments
- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events

OCC2S BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCC2S06	BLACK	6 M	1
OCC2S12	BLACK	12 M	1
OCC2S18	BLACK	18 M	1
OCC2S24	BLACK	24 M	1



# OCC Optical Cable

**Cables:** OCC 4x Single mode (9/125 μm)

**Connectors:** 2x Stratos HMC



**Cables:** OCC 2x Multi mode (50 or 62,5/125 μm)

**Connectors:** 2x Stratos HMC



## FEATURES

- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment
- 2 to 24 fibers, higher fiber counts are available on request
- Distribution Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- Helically stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Cables are suitable for use with single, as well as, multichannel connectors
- Excellent crush resistance to withstand crowd and vehicle traffic
- High tensile load rating for quick deployment and retrieval
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- Water-resistant and UV-resistant for extreme environments
- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events

OCC4S BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCC4S06	BLACK	6 M	1
OCC4S12	BLACK	12 M	1
OCC4S18	BLACK	18 M	1
OCC4S24	BLACK	24 M	1



## FEATURES

- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment
- 2 to 24 fibers, higher fiber counts are available on request
- Distribution Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- Helically stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Cables are suitable for use with single, as well as, multichannel connectors
- Excellent crush resistance to withstand crowd and vehicle traffic
- High tensile load rating for quick deployment and retrieval
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- Water-resistant and UV-resistant for extreme environments
- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events

OCC2M BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCC2M06	BLACK	6 M	1
OCC2M12	BLACK	12 M	1
OCC2M18	BLACK	18 M	1
OCC2M24	BLACK	24 M	1



# OCC Optical Cable

**Cables:** OCC 4x Multi mode (50 or 62,5/125 μm)

**Connectors:** 2x Stratos HMC



**Cables:** OCC 2x Single mode (9/125 μm)

**Connectors:** 2x Stratos HMC - Cable Drum Schill



**FEATURES**

- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment
- 2 to 24 fibers, higher fiber counts are available on request
- Distribution Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- Helicly stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Cables are suitable for use with single, as well as, multichannel connectors
- Excellent crush resistance to withstand crowd and vehicle traffic
- High tensile load rating for quick deployment and retrieval
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- Water-resistant and UV-resistant for extreme environments
- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events


OCC4M BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCC4M06	BLACK	6 M	1
OCC4M12	BLACK	12 M	1
OCC4M18	BLACK	18 M	1
OCC4M24	BLACK	24 M	1



**FEATURES**

- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment
- 2 to 24 fibers, higher fiber counts are available on request
- Distribution Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- Helicly stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Cables are suitable for use with single, as well as, multichannel connectors
- Excellent crush resistance to withstand crowd and vehicle traffic
- High tensile load rating for quick deployment and retrieval
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- Water-resistant and UV-resistant for extreme environments
- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events

OCC2S BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCC2S100	BLACK	100 M	1



# OCC Optical Cable

**Cables:** OCC 2x Single mode (9/125 μm)

**Connectors:** 2x Stratos HMC - Cable Drum Schill



**Cables:** OCC 4x Single mode (9/125 μm)

**Connectors:** 2x Stratos HMC - Cable Drum Schill



**FEATURES**

- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment
- 2 to 24 fibers, higher fiber counts are available on request
- Distribution Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- Helically stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Cables are suitable for use with single, as well as, multichannel connectors
- Excellent crush resistance to withstand crowd and vehicle traffic
- High tensile load rating for quick deployment and retrieval
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- Water-resistant and UV-resistant for extreme environments
- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events

OCC2S BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCC2S250	BLACK	250 M	1



**FEATURES**

- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment
- 2 to 24 fibers, higher fiber counts are available on request
- Distribution Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- Helically stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Cables are suitable for use with single, as well as, multichannel connectors
- Excellent crush resistance to withstand crowd and vehicle traffic
- High tensile load rating for quick deployment and retrieval
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- Water-resistant and UV-resistant for extreme environments
- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events

OCC4S BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCC4S100	BLACK	100 M	1



# OCC Optical Cable

**Cables:** OCC 4x Single mode (9/125 μm)

**Connectors:** 2x Stratos HMC - Cable Drum Schill



**Cables:** OCC 2x Multi mode (50 or 62,5/125 μm)


**Connectors:** 2x Stratos HMC - Cable Drum Schill



**FEATURES**

- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment
- 2 to 24 fibers, higher fiber counts are available on request
- Distribution Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- Helicly stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Cables are suitable for use with single, as well as, multichannel connectors
- Excellent crush resistance to withstand crowd and vehicle traffic
- High tensile load rating for quick deployment and retrieval
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- Water-resistant and UV-resistant for extreme environments
- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events


OCC4S BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCC4S250	BLACK	250 M	1



**FEATURES**

- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment
- 2 to 24 fibers, higher fiber counts are available on request
- Distribution Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- Helicly stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Cables are suitable for use with single, as well as, multichannel connectors
- Excellent crush resistance to withstand crowd and vehicle traffic
- High tensile load rating for quick deployment and retrieval
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- Water-resistant and UV-resistant for extreme environments
- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events

OCC2M BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCC2M100	BLACK	100 M	1



# OCC Optical Cable

**Cables:** OCC 2x Multi mode (50 or 62,5/125 μm)

**Connectors:** 2x Stratos HMC - Cable Drum Schill



**Cables:** OCC 4x Multi mode (50 or 62,5/125 μm)


**Connectors:** 2x Stratos HMC - Cable Drum Schill



## FEATURES

- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment
- 2 to 24 fibers, higher fiber counts are available on request
- Distribution Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- Helically stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Cables are suitable for use with single, as well as, multichannel connectors
- Excellent crush resistance to withstand crowd and vehicle traffic
- High tensile load rating for quick deployment and retrieval
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- Water-resistant and UV-resistant for extreme environments
- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events


OCC2M BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCC2M250	BLACK	250 M	1



## FEATURES

- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment
- 2 to 24 fibers, higher fiber counts are available on request
- Distribution Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- Helically stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Cables are suitable for use with single, as well as, multichannel connectors
- Excellent crush resistance to withstand crowd and vehicle traffic
- High tensile load rating for quick deployment and retrieval
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- Water-resistant and UV-resistant for extreme environments
- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events

OCC4M BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCC4M100	BLACK	100 M	1



# OCC Optical Cable

**Cables:** OCC 4x Multi mode (50 or 62,5/125 μm)

**Connectors:** 2x Stratos HMC - Cable Drum Schill



**Cables:** OCC 2x Single mode (9/125 μm)


**Connectors:** Available with LC, SC or ST connectors



**FEATURES**

- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment
- 2 to 24 fibers, higher fiber counts are available on request
- Distribution Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- Helically stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Cables are suitable for use with single, as well as, multichannel connectors
- Excellent crush resistance to withstand crowd and vehicle traffic
- High tensile load rating for quick deployment and retrieval
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- Water-resistant and UV-resistant for extreme environments
- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events

OCC4M BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCC4M250	BLACK	250 M	1



**FEATURES**

- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events
- Water-resistant and UV-resistant for extreme environments
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- High tensile load rating for quick deployment and retrieval
- Excellent crush resistance to withstand crowd and vehicle traffic
- Cables are suitable for use with single, as well as, multichannel connectors
- Helically stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Breakout Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- 2 to 24 fibers, higher fiber counts are available on request
- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment



OCB2S BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCB2S06	BLACK	6 M	1
OCB2S12	BLACK	12 M	1
OCB2S18	BLACK	18 M	1
OCB2S24	BLACK	24 M	1



# OCC Optical Cable

**Cables:** OCC 4x Single mode (9/125 μm)

**Connectors:** Available with LC, SC or ST connectors

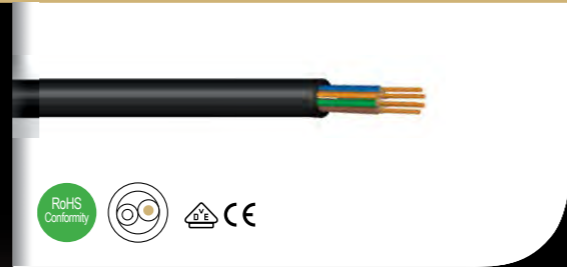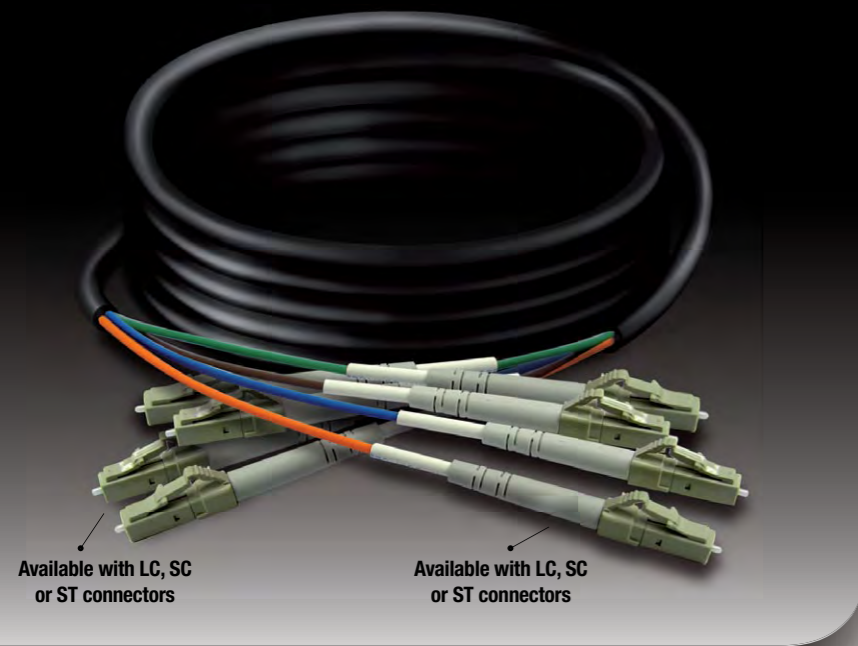

**Cables:** OCC 2x Multi mode (50 or 62,5/125 μm)

**Connectors:** Available with LC, SC or ST connectors



## FEATURES

- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events
- Water-resistant and UV-resistant for extreme environments
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- High tensile load rating for quick deployment and retrieval
- Excellent crush resistance to withstand crowd and vehicle traffic
- Cables are suitable for use with single, as well as, multichannel connectors
- Helicallly stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Breakout Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- 2 to 24 fibers, higher fiber counts are available on request
- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment

OCB4S BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCB4S06	BLACK	6 M	1
OCB4S12	BLACK	12 M	1
OCB4S18	BLACK	18 M	1
OCB4S24	BLACK	24 M	1



## FEATURES

- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events
- Water-resistant and UV-resistant for extreme environments
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- High tensile load rating for quick deployment and retrieval
- Excellent crush resistance to withstand crowd and vehicle traffic
- Cables are suitable for use with single, as well as, multichannel connectors
- Helicallly stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Breakout Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- 2 to 24 fibers, higher fiber counts are available on request
- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment



OCB2M BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCB2M06	BLACK	6 M	1
OCB2M12	BLACK	12 M	1
OCB2M18	BLACK	18 M	1
OCB2M24	BLACK	24 M	1



# OCC Optical Cable

**Cables:** OCC 4x Multi mode (50 or 62,5/125 μm)

**Connectors:** Available with LC, SC or ST connectors

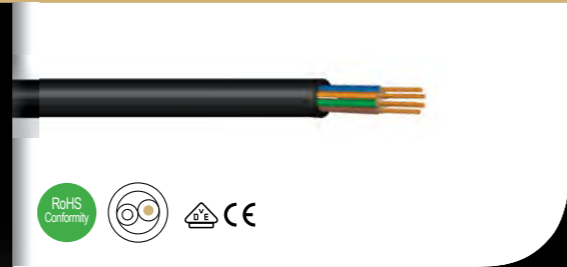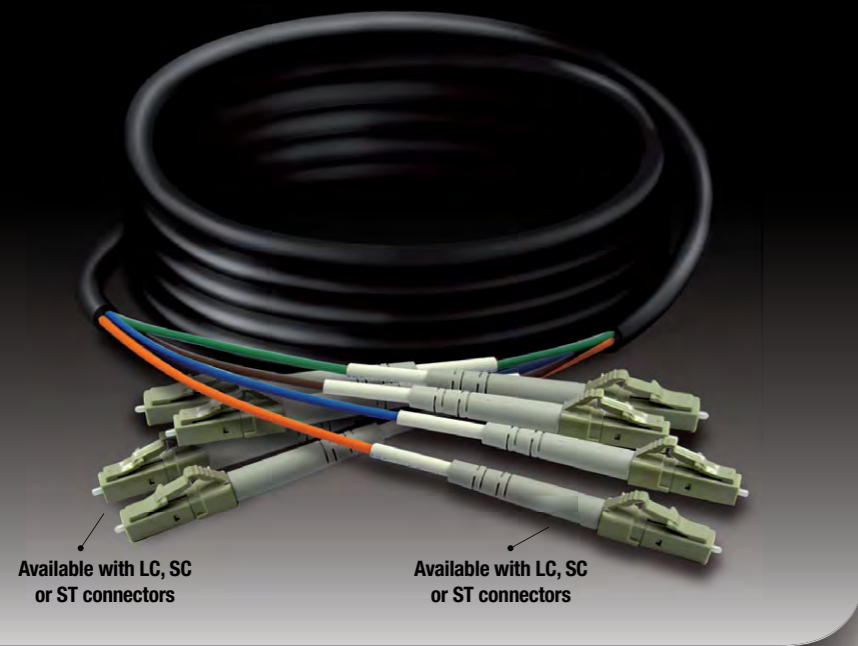

**Cables:** OCC 2x Single mode (9/125 μm)


**Connectors:** Available with LC, SC or ST connectors - Cable Drum Schill



## FEATURES

- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events
- Water-resistant and UV-resistant for extreme environments
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- High tensile load rating for quick deployment and retrieval
- Excellent crush resistance to withstand crowd and vehicle traffic
- Cables are suitable for use with single, as well as, multichannel connectors
- Helically stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Breakout Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- 2 to 24 fibers, higher fiber counts are available on request
- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment


OCB4M BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCB4S06	BLACK	6 M	1
OCB4M12	BLACK	12 M	1
OCB4M18	BLACK	18 M	1
OCB4M24	BLACK	24 M	1



## FEATURES

- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events
- Water-resistant and UV-resistant for extreme environments
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- High tensile load rating for quick deployment and retrieval
- Excellent crush resistance to withstand crowd and vehicle traffic
- Cables are suitable for use with single, as well as, multichannel connectors
- Helically stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Breakout Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- 2 to 24 fibers, higher fiber counts are available on request
- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment


OCB2S BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCB2S100	BLACK	100 M	1



# OCC Optical Cable

**Cables:** OCC 2x Single mode (9/125 μm)

**Connectors:** Available with LC, SC or ST connectors - Cable Drum Schill

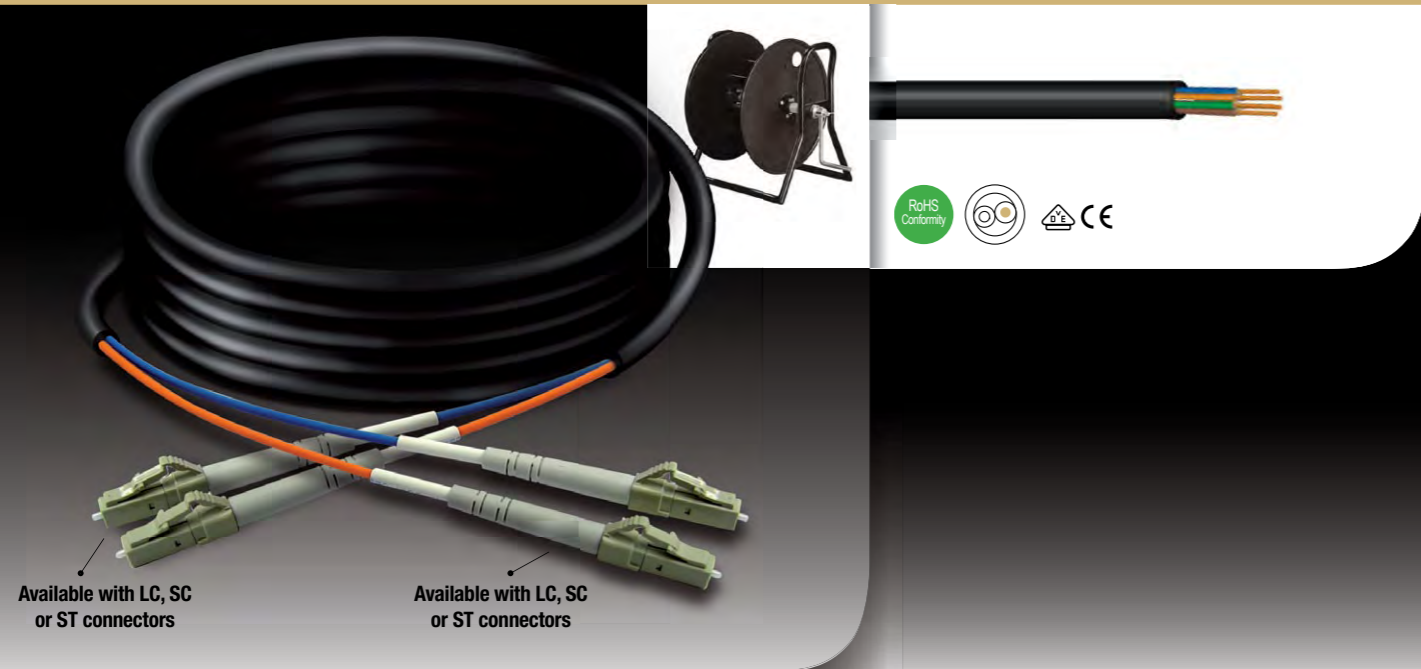

**Cables:** OCC 4x Single mode (9/125 μm)


**Connectors:** Available with LC, SC or ST connectors - Cable Drum Schill



## FEATURES

- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events
- Water-resistant and UV-resistant for extreme environments
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- High tensile load rating for quick deployment and retrieval
- Excellent crush resistance to withstand crowd and vehicle traffic
- Cables are suitable for use with single, as well as, multichannel connectors
- Helicallly stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Breakout Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- 2 to 24 fibers, higher fiber counts are available on request
- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment


OCB2S BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCB2S250	BLACK	250 M	1



## FEATURES

- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events
- Water-resistant and UV-resistant for extreme environments
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- High tensile load rating for quick deployment and retrieval
- Excellent crush resistance to withstand crowd and vehicle traffic
- Cables are suitable for use with single, as well as, multichannel connectors
- Helicallly stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Breakout Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- 2 to 24 fibers, higher fiber counts are available on request
- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment

OCB4S BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCB4S100	BLACK	100 M	1



# OCC Optical Cable

**Cables:** OCC 4x Single mode (9/125 μm)

**Connectors:** Available with LC, SC or ST connectors - Cable Drum Schill



**Cables:** OCC 2x Multi mode (50 or 62,5/125 μm)


**Connectors:** Available with LC, SC or ST connectors - Cable Drum Schill



## FEATURES

- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events
- Water-resistant and UV-resistant for extreme environments
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- High tensile load rating for quick deployment and retrieval
- Excellent crush resistance to withstand crowd and vehicle traffic
- Cables are suitable for use with single, as well as, multichannel connectors
- Helicallly stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Breakout Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- 2 to 24 fibers, higher fiber counts are available on request
- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment


OCB4S BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCB4S100	BLACK	100 M	1



## FEATURES

- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events
- Water-resistant and UV-resistant for extreme environments
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- High tensile load rating for quick deployment and retrieval
- Excellent crush resistance to withstand crowd and vehicle traffic
- Cables are suitable for use with single, as well as, multichannel connectors
- Helicallly stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Breakout Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- 2 to 24 fibers, higher fiber counts are available on request
- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment

OCB2M BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCB2M100	BLACK	100 M	1

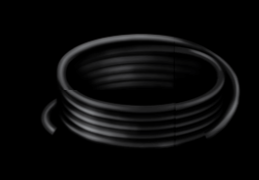

# OCC Optical Cable

**Cables:** OCC 2x Multi mode (50 or 62,5/125 μm)

**Connectors:** Available with LC, SC or ST connectors - Cable Drum Schill



**Cables:** OCC 4x Multi mode (50 or 62,5/125 μm)


**Connectors:** Available with LC, SC or ST connectors - Cable Drum Schill



## FEATURES

- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events
- Water-resistant and UV-resistant for extreme environments
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- High tensile load rating for quick deployment and retrieval
- Excellent crush resistance to withstand crowd and vehicle traffic
- Cables are suitable for use with single, as well as, multichannel connectors
- Helicallly stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Breakout Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- 2 to 24 fibers, higher fiber counts are available on request
- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment


OCB2M BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCB2M250	BLACK	250 M	1



## FEATURES

- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events
- Water-resistant and UV-resistant for extreme environments
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- High tensile load rating for quick deployment and retrieval
- Excellent crush resistance to withstand crowd and vehicle traffic
- Cables are suitable for use with single, as well as, multichannel connectors
- Helicallly stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Breakout Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- 2 to 24 fibers, higher fiber counts are available on request
- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment

OCB4M BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCB4M100	BLACK	100 M	1

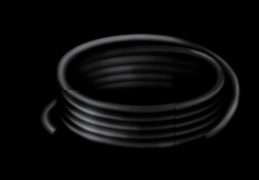

# OCC Optical Cable

**Cables:** OCC 4x Multi mode (50 or 62,5/125 μm)

**Connectors:** Available with LC, SC or ST connectors - Cable Drum Schill



## FEATURES

- Outdoor, field proven cables are easily deployed and retrieved for remote news gatherings and sporting events
- Water-resistant and UV-resistant for extreme environments
- Lightweight Riser and Plenum cables are ideally suited for stadium and arena venues for video-on-demand applications. Interlocking armor cable options also available for stadium and arena venues
- High tensile load rating for quick deployment and retrieval
- Excellent crush resistance to withstand crowd and vehicle traffic
- Cables are suitable for use with single, as well as, multichannel connectors
- Helically stranded cable core for flexibility, survival in difficult pulls, and excellent mechanical protection for the optical fibers
- Breakout Broadcast fiber optic cables are immune to electro-magnetic and radio frequency interference
- 2 to 24 fibers, higher fiber counts are available on request
- Broadcast cables made in a variety of colors for easy identification or to blend in to the environment

OCB4M BLACK			
PART NR.	COLOR	LENGTH	PACK. UNIT
OCB4M250	BLACK	250 M	1

